

Attachment A10

**Pedestrian Environmental Wind
Assessment - 15-25 Hunter and 105-107 Pitt
Street, Sydney**

15-23 HUNTER STREET AND 105-107 PITT STREET, SYDNEY CFD ENVIRONMENTAL WIND STUDY



MEL CONSULTANTS PTY LTD

WIND ENGINEERING CONSULTANCY SPECIALISING IN DETERMINING WIND EFFECTS ON BUILDINGS, STRUCTURES, AND THE ENVIRONMENT

LAMINAR2 TURBULENT PTY LTD

THERMO-FLUID DYNAMICS TECHNICAL CONSULTANTS

15-23 Hunter Street and 105-107 Pitt Street, Sydney CFD Environmental Wind Study

By T. McQueen, B. Gilhome and J. Kostas

SUMMARY




An environmental wind study to assess the wind conditions in the public realm for the 15-23 Hunter Street and 105-107 Pitt Street, Sydney development was conducted for 16 wind directions using Computational Fluid Dynamics (CFD). A CFD model of the DCP Base Case and the Proposed development, within surrounding buildings, with no existing or future ground level trees, was simulated in a natural wind boundary layer to determine likely local environmental wind conditions.

The results of the CFD wind study showed the Proposed development achieved a mean annual wind comfort speed of 2.47m/s compared to 2.48m/s for the DCP Base Case over the Sky View Factor (SVF) evaluation area (as requested by City of Sydney) using the methodology outlined Schedule 12 of the Sydney DCP, Section 12.2.

Report 94-20-CFD-ENV-02

June 2022

FLEMINGTON ESTATE MASTERPLAN CFD ENVIRONMENTAL WIND STUDY	
MEL CONSULTANTS REPORT NO:	94-20-CFD-ENV-02
PREPARED FOR: Milligan Group Pty Ltd 321 Riley Street Surry Hills NSW 2010	PREPARED BY: MEL Consultants Pty Ltd & Laminar2 Turbulent Pty Ltd 22 Cleeland Road Oakleigh South VIC 3167
Contact: Jarrod White Ph: +61 408 557 756	Contact: J. Kostas Ph: +61 3 8516 9680

PREPARED BY:			
	T. McQueen Fluid Dynamics Engineer, L2T	Date:	07 th June 2022
REVIEWED BY:			
	B. Gilhome Founder and Principal, L2T	Date:	07 th June 2022
RELEASED BY:			
	J. Kostas Director, MEL Consultants	Date:	08 th June 2022

REVISION HISTORY		
Revision No:	Date Issued	Reason/Comment
0	30 th May 2022	Initial Issue
1	30 th May 2022	Remove internal Ref. No.
2	08 th June 2022	Additional Figures

DISTRIBUTION		
Copy No: 1		
Copy	Location	Type
1	Milligan Group Pty Ltd	Electronic PDF
2	MEL Consultants – Report Library	Electronic PDF
3	L2T – Project File	Electronic PDF
4	MEL Consultants – Project File	Hardcopy

NOTE: This is a controlled document within the document control system. If revised, it must be marked SUPERSEDED and returned to the MEL Consultants Pty Ltd contact.

CONTENTS

1	INTRODUCTION	5
2	ENVIRONMENTAL WIND CRITERIA.....	7
3	CFD MODEL AND TECHNIQUES	9
4	INTERPRETATION OF CFD RESULTS	12
5	DISCUSSION OF RESULTS	13
	5.1 DCP BASE CASE VERSUS PROPOSED.....	13
6	CONCLUSIONS	15
7	REFERENCES	16
8	FIGURES.....	17
	8.1 CONFIGURATION FIGURES	19
	8.2 RESULT FIGURES.....	22
9	APPENDIX A: ADDITIONAL FIGURES.....	24
	9.1 DCP BASE CASE.....	25
	9.2 PROPOSED.....	34

1 INTRODUCTION

The proposed 15-23 Hunter Street and 105-107 Pitt Street development includes the addition of a laneway and high-rise tower located on the corner of Hunter and Pitt Street in the central zone of the Sydney CBD.

The immediate surrounding terrain is dominated by high-rise commercial buildings of Sydney CBD and in the far field the surrounding terrain includes suburban housing and the open waters of Circular Quay and Darling Harbour, as shown in Figure 1 below.



Figure 1: Location of the development site within the context of the Sydney CBD. A 300m radius centred around the site is indicated in the figure.

There is currently significant pedestrian activation in the surrounding streetscapes and this is expected to increase in the future with the proposed development.

At the request of City of Sydney an additional study was requested using Computational Fluid Dynamics (CFD) to compare the wind comfort standard (as per the methodology outlined in Schedule 12 of the Sydney DCP, Section 12.2, Procedure B) of the DCP Base Case (which includes the internal laneway) and the Proposed development. And, if required, refine the built form of the Proposed development to achieve wind comfort standard equivalence or better. The evaluation area was specified by City of Sydney to be identical to that utilised for the Sky View Factor (SVF) evaluation area, as shown in Figure 2.

The CFD wind study was carried out on the Laminar2 Turbulent supercomputer in May 2022.

2 ENVIRONMENTAL WIND CRITERIA

The advancement of CFD techniques, including computational capabilities, simulation of boundary layer flows of the natural wind, and ongoing correlation with wind tunnel studies has facilitated the prediction of wind effects induced by proposed developments on the surrounding streetscapes.

Wind conditions are commonly required to be assessed using a set of generally accepted environmental wind criteria. The criteria used in this study are based on those proposed by Melbourne (Reference 1). It is important to note that Melbourne (Reference 1) found people are most sensitive to the peak gust wind speed and its associated gradient. Hence, gust wind speeds have traditionally been used to develop environmental wind criteria.

However, due to the nature of the CFD analysis technique implemented – which is not capable of resolving instantaneous gust effects – these criteria need to be defined in terms of an hourly mean wind speed.

To assess whether the predicted wind conditions are likely to be acceptable or not, some form of criteria are required. The Sydney Design Control Plan (2012) has defined wind comfort standards for the assessment of the wind conditions in Sydney City. The definition of the wind comfort standard is as follows:

Wind Comfort Standard is an hourly mean wind speed for each wind direction, with probability of exceedance less than 5% per annum (averaged over all wind directions) measured between 6am and 10pm Eastern Standard Time (equivalent to 292 hours per annum), of equal to or less than:

- 4 metres/second for sitting areas
- 6 metres/second for standing areas
- 8 metres/second for walking areas

Mean wind speed means the maximum of:

- Hourly mean wind speed, or
- Gust equivalent mean wind speed (gust wind speed divided by 1.85)

Please note that this CFD wind study only considers the hourly mean wind speeds and not the gust equivalent mean wind speed as usually recorded in wind tunnel model testing.

3 CFD MODEL AND TECHNIQUES

The wind flow around the development was modelled using OpenFOAM CFD software. Figure 3 shows the computational domain and coordinate system used for this study. The proposed development and surrounding buildings were modelled at full-scale. The computational domain was 3000 m in the X-direction, 4500 m in the Y-direction, and 2000 m in the Z-direction. The large computational domain ensured that the blockage ratio of the CFD model was less than 3%. It also ensured that the domain boundaries were sufficiently far from the proposed development and surrounding buildings to have a negligible effect on the wind flow in the area of interest. The proposed development (shown in red) was laterally centred in the domain and was located approximately 2000 m downstream of the *inlet* (transparent blue plane). The surrounding buildings (shown in yellow) and topography (shown in green) were modelled out to a radius of 500 m from the site including all existing or under construction buildings as of February 2022. Beyond the 500 m radius, a flat ground plane with a rough wall function applied was included to simulate the atmospheric boundary layer. Different wind directions were simulated by rotating the proposed development, the surrounding buildings, and the topography within the CFD domain.

The wind flow enters the domain at the *inlet* and exits the domain at the *outlet* (transparent red plane). For all wind directions, the approach mean velocity boundary layer profile was modelled as Terrain Category 3 (TC3) – as defined in AS/NZS 1170.2:2021. For the quality assurance process, a CFD simulation without the building model was performed to verify a TC3 boundary layer was achieved throughout the computational domain. Figure 4 shows the simulated boundary layer and the equivalent AS/NZS 1170.2:2021 and ISO 4354:2009 profiles. The simulated boundary layer profile had a deviation of less than 3.5% from the

AS/NZS 1170.2:2021 and ISO 4354:2009 profiles. The boundary layer turbulence intensity profiles are also provided in these standards. However, as a steady-state Reynolds-averaged Navier-Stokes (RANS) turbulence model was used for the simulation, which considers the mean flow and does not simulate the turbulent fluctuations, turbulence intensity profiles are not relevant.

The domain was meshed with both hexahedra and split-hexahedra cells using SnappyHexMesh. Smaller mesh cells were used near the proposed development and surrounding buildings out to a radius of 550 m, and near the topography surface across the whole domain. The meshes generated for the study were comprised of approximately 25 million cells.

The fluid (wind) flow was solved using a customised version of OpenFoam-v2012 using the standard k-epsilon turbulence model. OpenFOAM uses the Finite Volume Method to discretise the governing equations, which are then solved using the OpenFOAM SIMPLE algorithm. Second-order discretisation schemes were used for all variables, except for k and epsilon divergence terms where a first-order upwind scheme was used. The Laplacian terms were discretised using a linear limited scheme with a blend factor of 0.5. During the solve the flow solution was monitored at critical points in the domain. The simulation was iterated until the velocity at these points had stabilised to a constant value, or if flow oscillation was observed then the oscillation was about a steady value.

The CFD parameters used have been previously correlated with wind tunnel data to provide confidence in the simulation results. The quality assurance correlation study investigated different RANS turbulence models to determine their influence on the simulated wind speeds around buildings. The standard k-epsilon model

predicted very similar wind speeds compared to others (Realizable k-epsilon and k-omega Shear Stress Transport) and was more robust in its solution. Therefore, the k-epsilon turbulence model was used in this study. The quality assurance correlation study showed that the error in pedestrian level mean velocities between the wind tunnel and CFD was $\leq 10\%$ of the reference velocity, using the k-epsilon model.

The CFD environmental wind studies undertaken satisfy, and in most cases exceed, all applicable AWES-QAM-1-2019 guidelines and AWES Guidelines for Pedestrian Wind Effects Criteria.

4 INTERPRETATION OF CFD RESULTS

The CFD results presented in the following sections are based on steady-state flow fields (time-averaged). The pedestrian wind conditions do not include or account for natural wind flow unsteadiness/gustiness that is provided by the wind tunnel studies. However, the CFD results show the wind flow over a large area with high spatial resolution. Compared to the discrete points of a wind tunnel study, the CFD results assist with understanding the general environmental wind flow around the buildings and identifying the elements of the proposed development that impact pedestrian level wind conditions.

The CFD simulation results presented provide analysis of the pedestrian wind environment and do not intend to replace wind tunnel environmental wind studies.

Calculation of the mean annual wind comfort speed for each configuration is calculated from a plane at 1.5m above the ground plane over the Sky View Factor (SVF) evaluation area using an area weighted average. It is important to area weight each cell value (wind speed) to avoid biasing results as cell sizes vary – please see Figure 5.

High spatial resolution plots of the average pedestrian wind speeds will be presented for verification purposes as requested by the City of Sydney.

5 DISCUSSION OF RESULTS

The DCP Base Case and the Proposed development (Preferred Building Envelope) at 15-23 Hunter Street and 105-107 Pitt Street, Sydney were CFD simulated within a 550m radius Sydney City context model for 16 wind directions, ie. at 22.5° intervals. The DCP Base Case configuration within the context model can be seen in Figures 6 to 8 and the Proposed development configuration within the context model can be seen in Figures 9 to 11. The following section outlines the mean wind speed results using methodology as outlined Schedule 12 of the Sydney DCP, Section 12.2.

5.1 DCP BASE CASE VERSUS PROPOSED

The results of the CFD wind study are that the Proposed development achieves a mean annual wind comfort speed of 2.47m/s compared to 2.48m/s for the DCP Base Case, see Table 1.

**Table 1: Pedestrian Mean Annual Wind Comfort Speed
(averaged over the Sky View Evaluation Area)**

Averaging Area	DCP Base Case	Proposal
Sky View	2.48m/s	2.47m/s

The annual, all wind direction, pedestrian mean wind comfort level contour plots can be seen in Figure 12 for the DCP Base Case configuration and Figure 13 for the Proposed development.

The wind speed at each data point in the computational mesh, on a plane 1.5m above the ground, within the SVF evaluation area is plotted as a ranked cumulative plot and presented in the Appendix A Figure 14 for both the DCP Base Case and Proposed development. Pedestrian wind speed contour plots for each individual wind direction are shown in the Appendix A Figure 15 to Figure 30 for the DCP Base Case and Figure 31 to Figure 46 for the Proposed Development. Due to the minimal geometric differences between the DCP Base Case and Proposed development configurations together with the shielded nature of the development site the pedestrian wind differences are observed to be only minor.

6 CONCLUSIONS

An environmental wind study to assess the wind conditions in the public realm for the 15-23 Hunter Street and 105-107 Pitt Street, Sydney development was conducted for 16 wind directions using CFD. A CFD model of the DCP Base Case and the Proposed development, within surrounding buildings, with no existing or future ground level trees, was simulated in a natural wind boundary layer to determine likely local environmental wind conditions.

The results of the CFD wind study showed the Proposed development achieved a mean annual wind comfort speed of 2.47m/s compared to 2.48m/s for the DCP Base Case over the Sky View Factor (SVF) evaluation area (as requested by City of Sydney) using the methodology outlined Schedule 12 of the Sydney DCP, Section 12.2.

7 REFERENCES

1. Melbourne W. H., 1978, Criteria for environmental wind conditions, *Journal of Industrial Aerodynamics*, Volume 3, pp. 241-249
2. Melbourne W. H., 1978, Wind environment studies in Australia, *Journal of Industrial Aerodynamics*, Volume 3, pp. 201-214

8 FIGURES



**Figure 2: Sky View Area (City of Sydney Wind Comfort Assessment Area)
Depicted by the Orange Line**

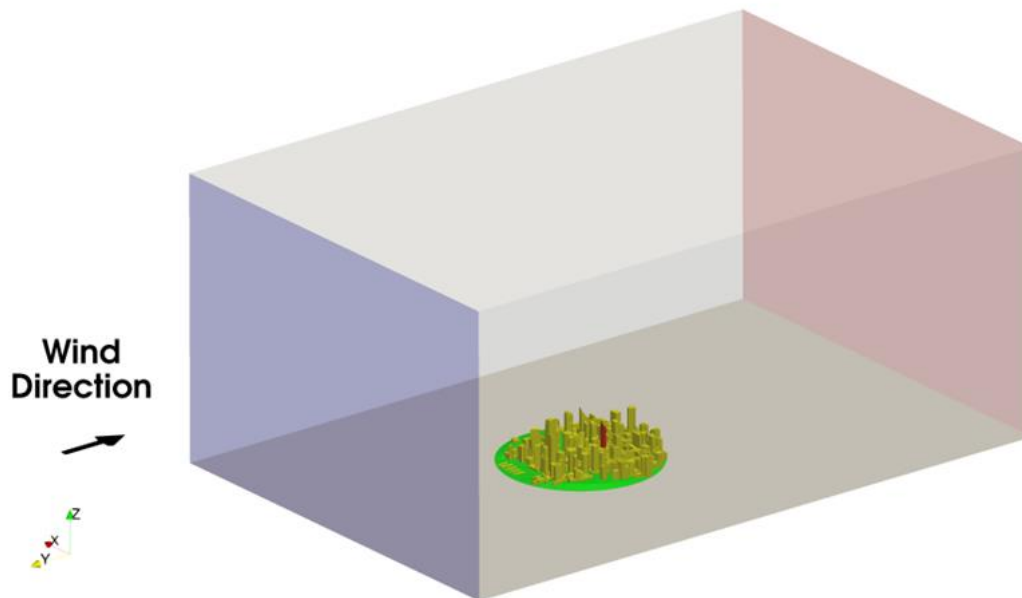


Figure 3: CFD Domain

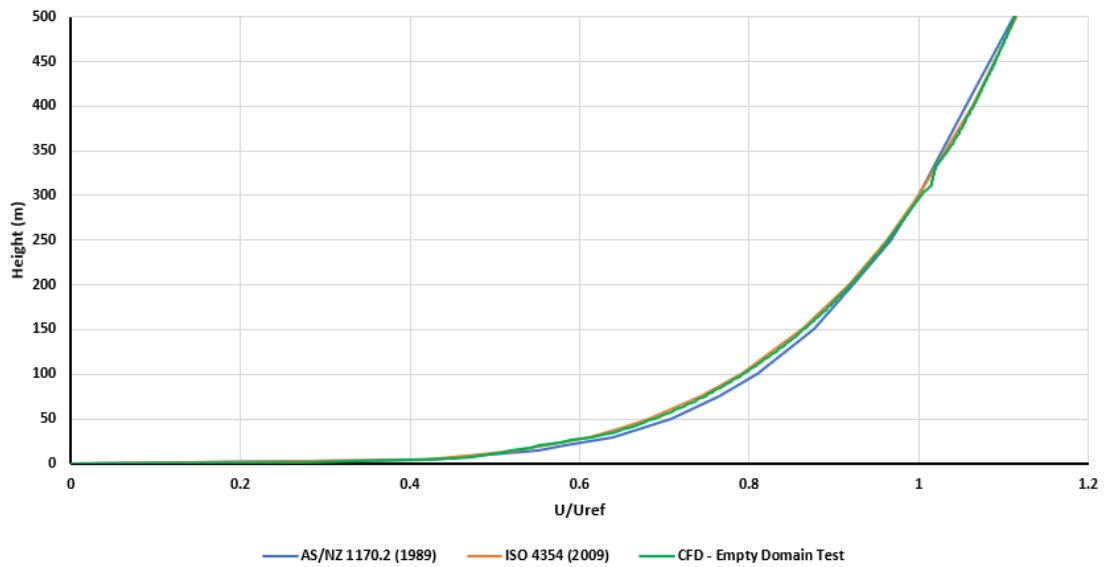


Figure 4: Full scale TC3 Boundary Layer Mean Velocity Profile for All Wind Directions

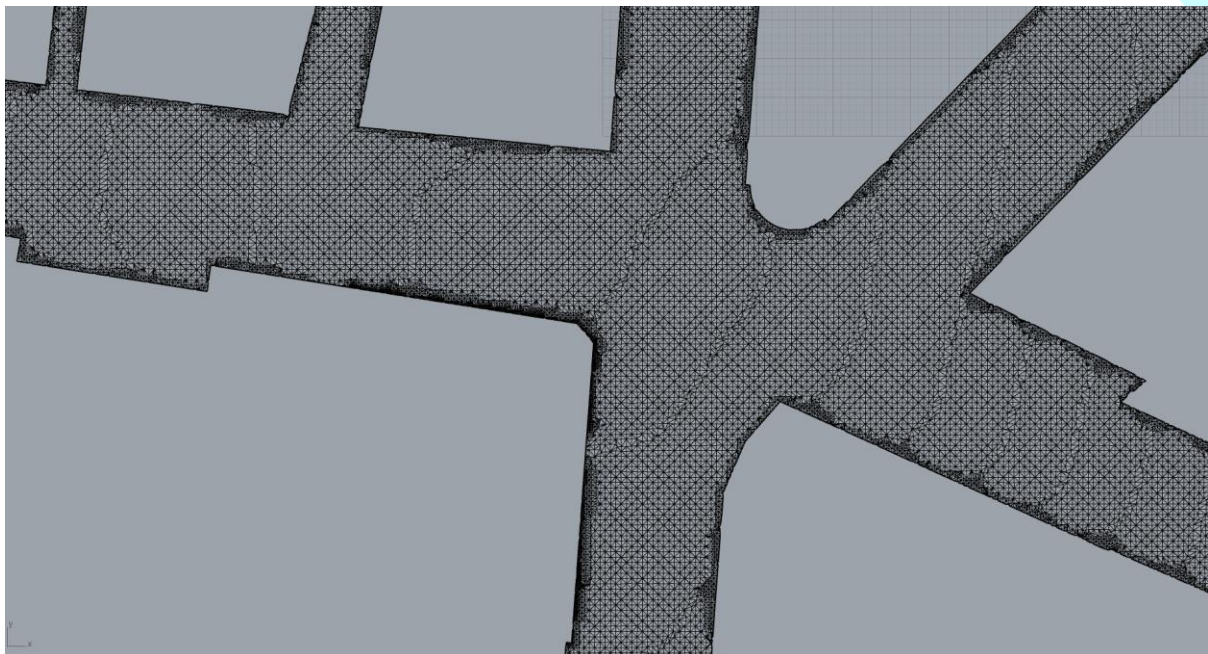


Figure 5: Close Up of Mesh Cells at Pedestrian Level (1.5m Plane Above Ground) Within the Sky View Area

8.1 CONFIGURATION FIGURES



Figure 6: Northeast View of DCP Base Case

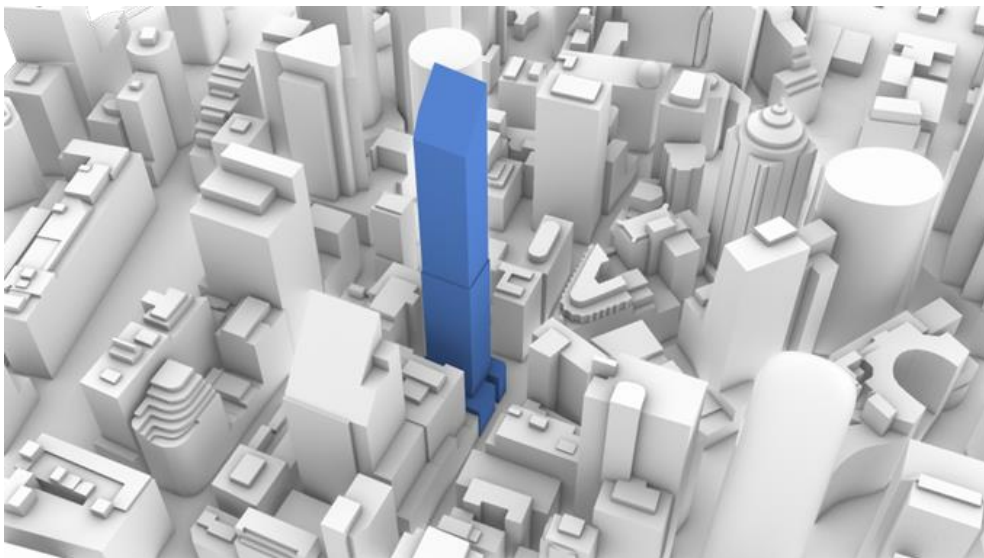


Figure 7: Southeast View of DCP Base Case



Figure 8: North View of DCP Base Case within Context Model



Figure 9: Northeast View of Proposed

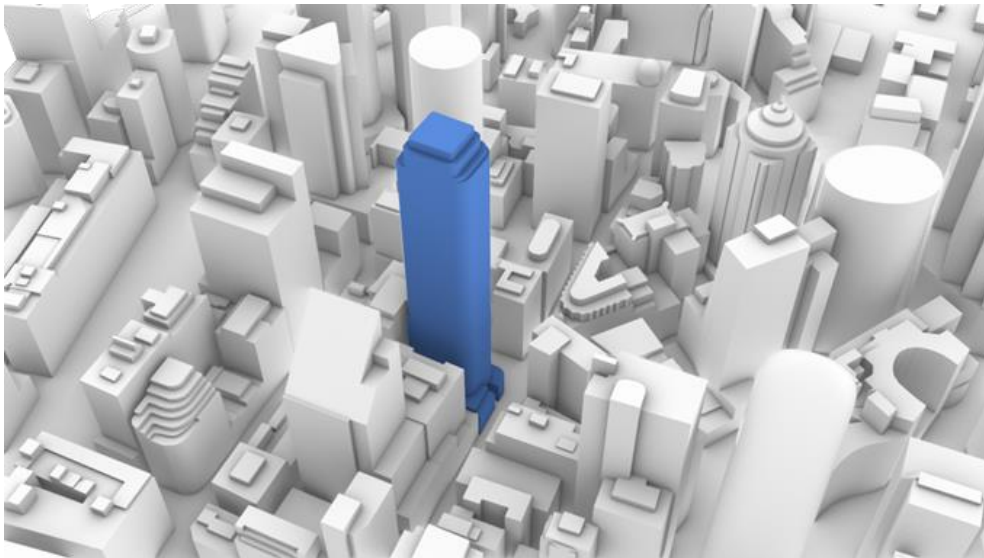


Figure 10: Southeast View of Proposed



Figure 11: North View of Proposed within Context Model

8.2 RESULT FIGURES

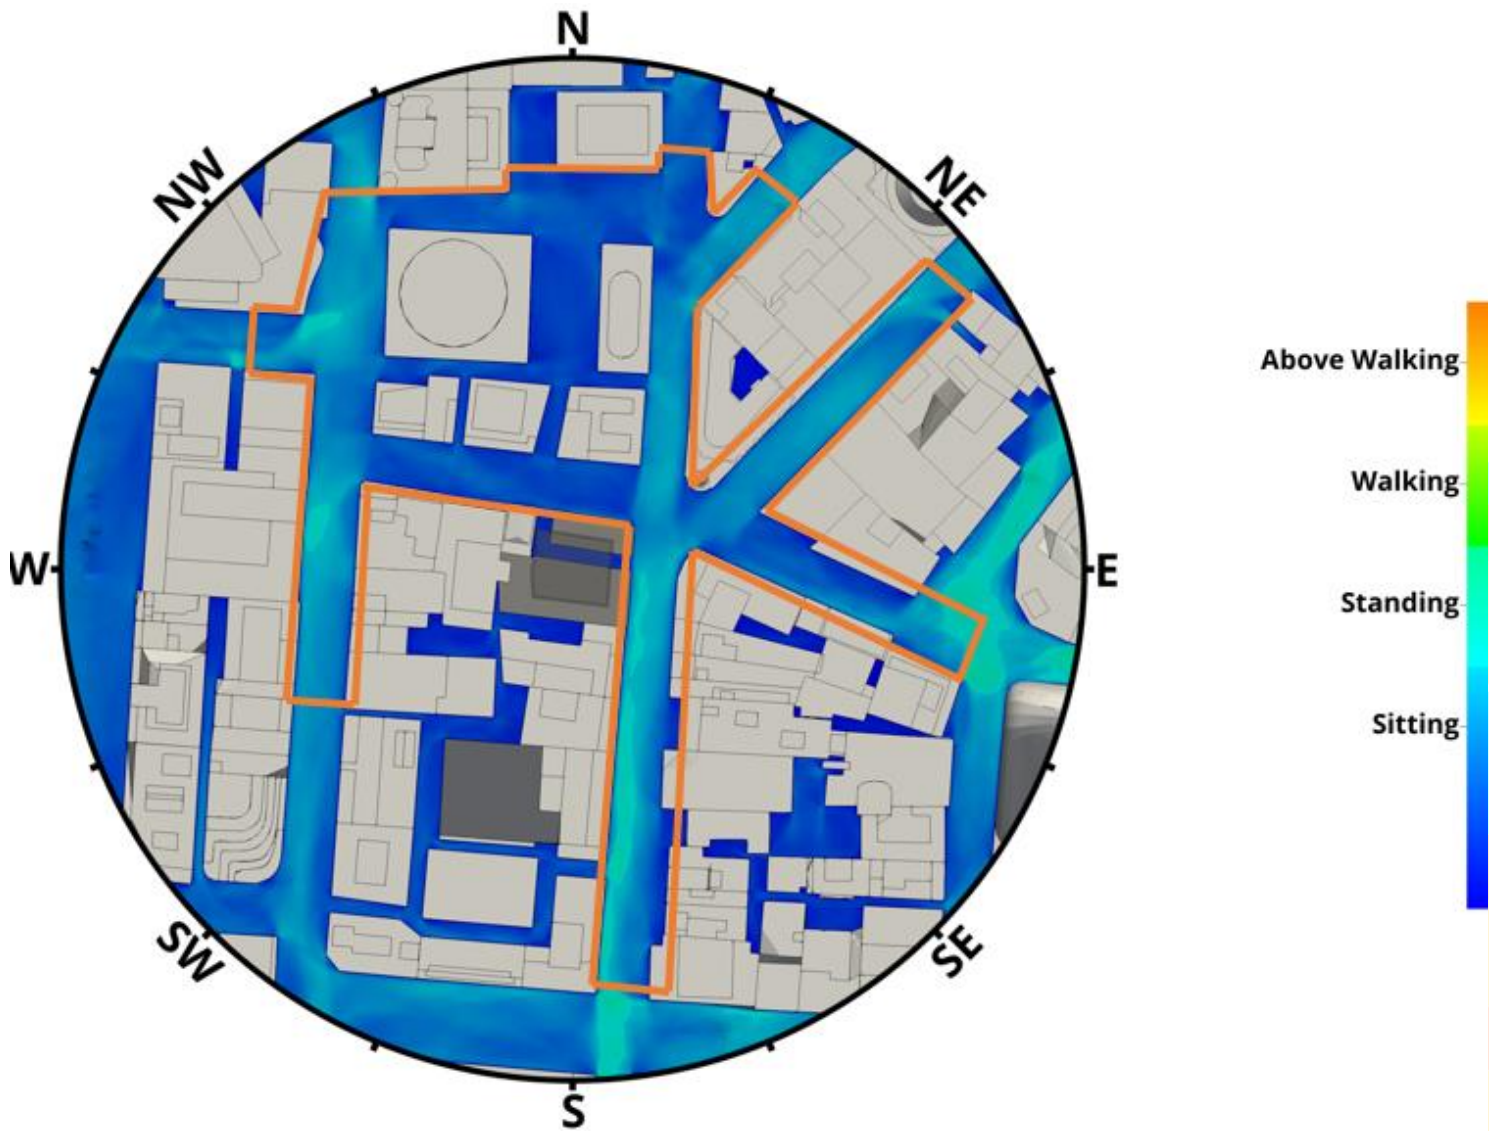


Figure 12: DCP Base Case, Planview, Annual (All Wind Direction) Pedestrian Mean Wind Comfort Level Contour Plot. The Orange Line Depicts the Sky View Evaluation Area

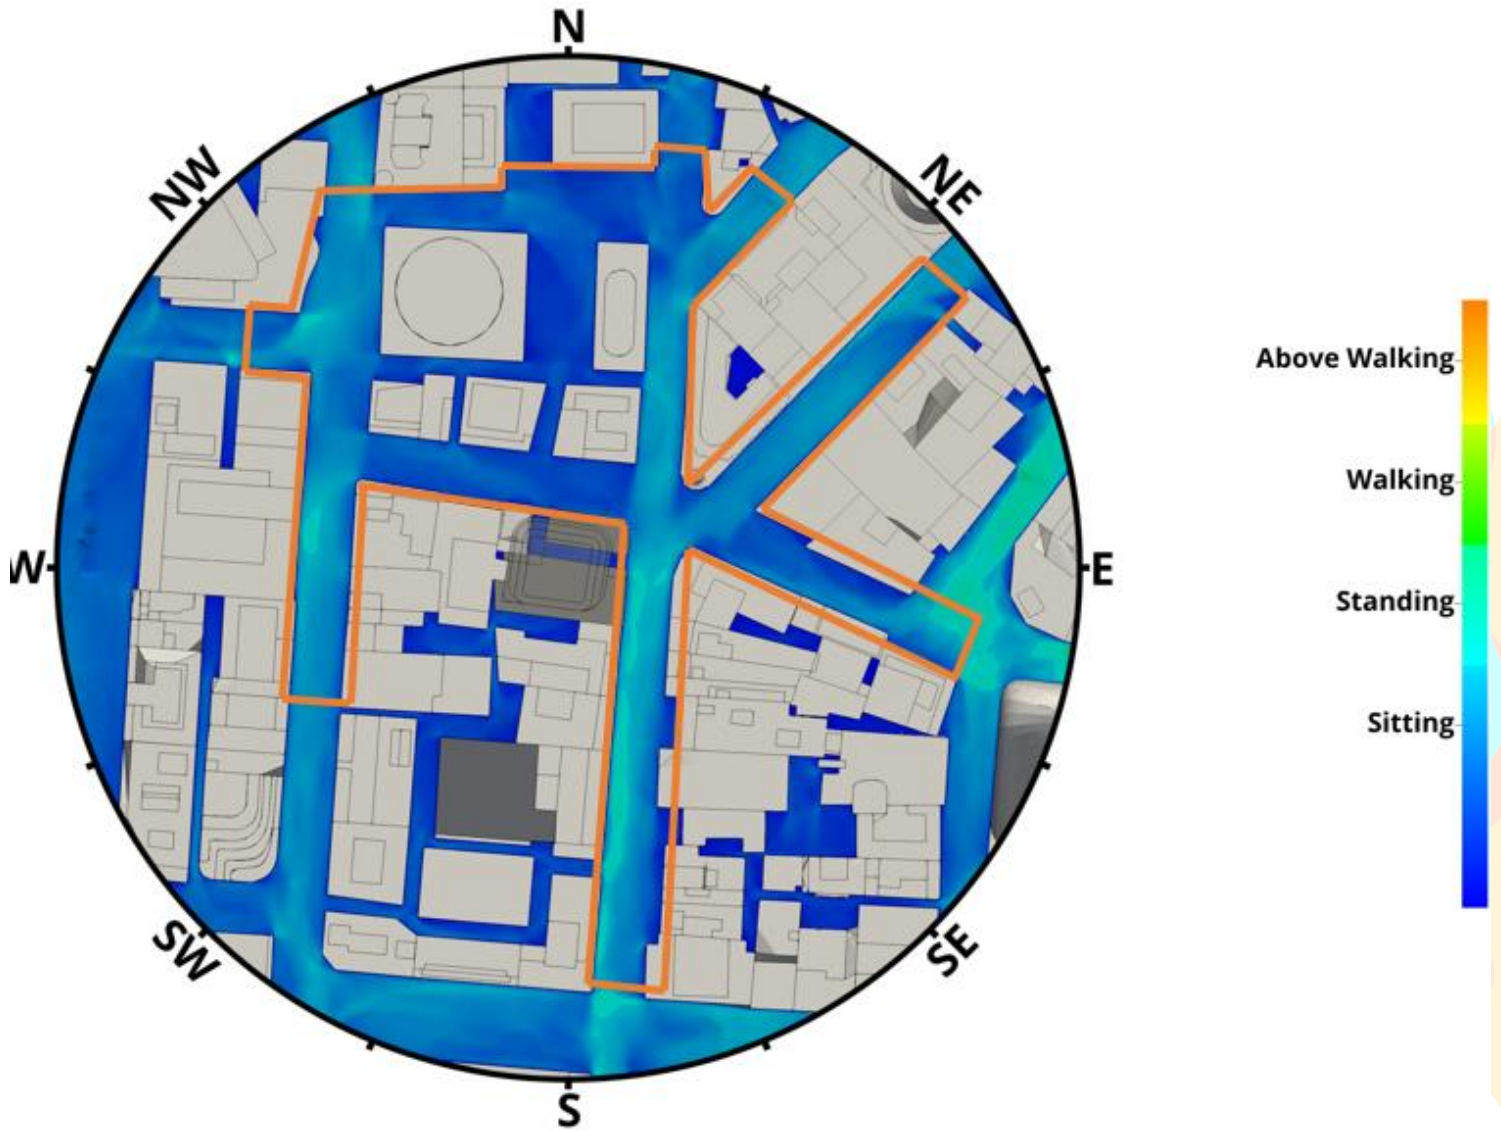


Figure 13: Proposed, Planview, Annual (All Wind Direction) Pedestrian Mean Wind Comfort Level Contour Plot. The Orange Line Depicts the Sky View Evaluation Area

9 APPENDIX A: ADDITIONAL FIGURES


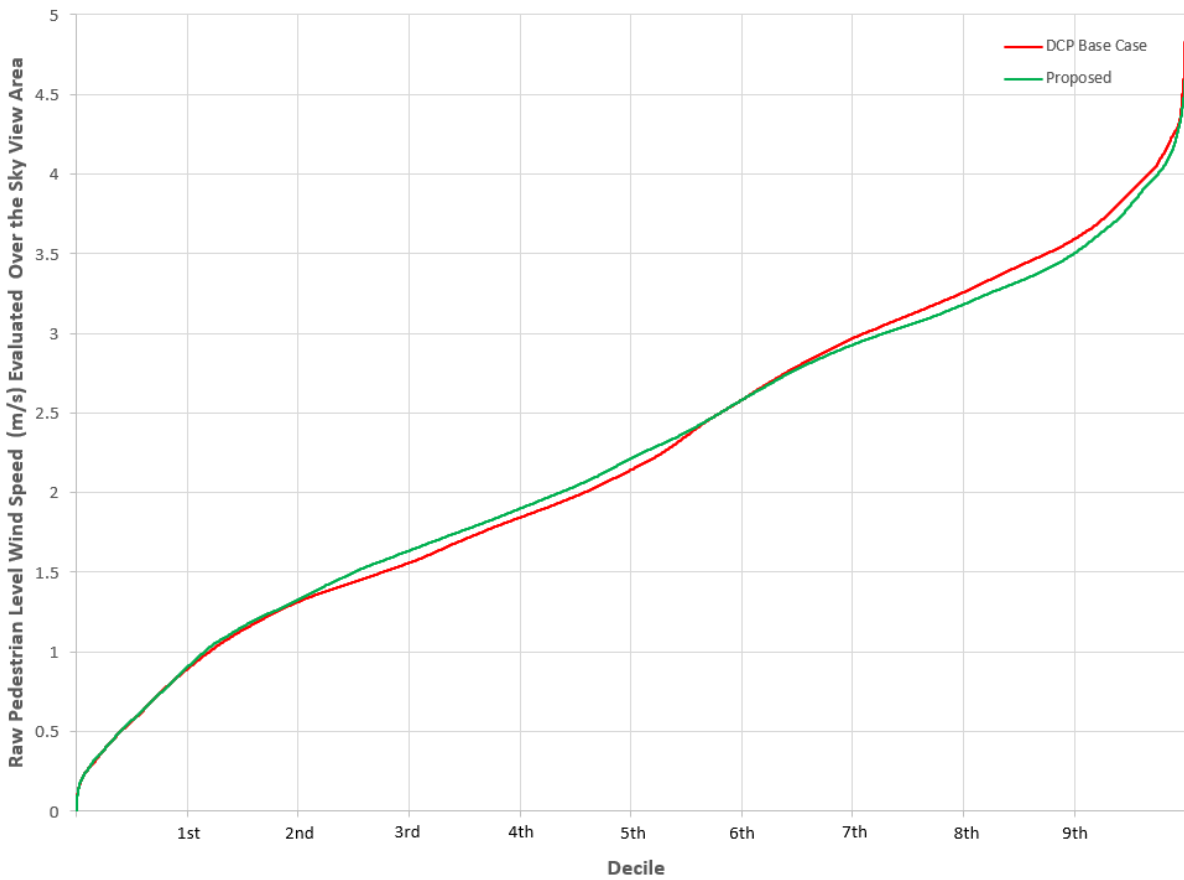


Figure 14: Ranked Cumulative Plot of the Annual Pedestrian Mean Wind Speeds for the DCP Base Case and Proposed Dev Over the Sky View Evaluation Area. (Note: the raw data has been used for this plot; a non-uniform grid was used in the computational domain)

9.1 DCP BASE CASE

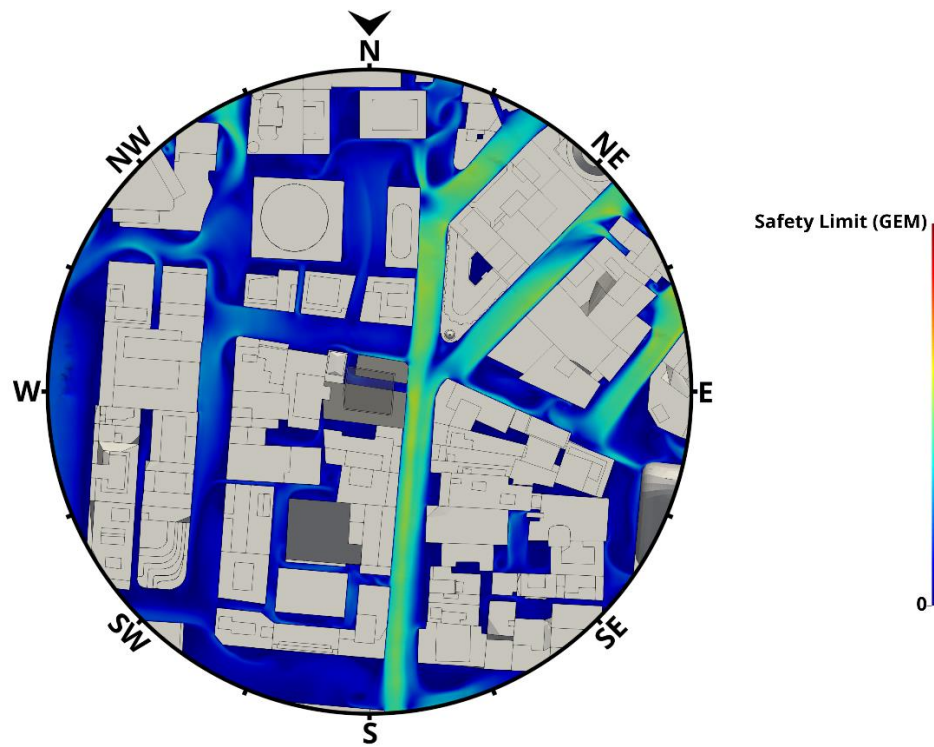

**Figure 15: DCP Base Case, North Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

¹ The Safety Limit Gust Equivalent Mean (GEM) is set at 12.97 m/s. This corresponds to an annual maximum peak 0.5 second gust wind speed in one hour measured between 6am and 10pm Eastern Standard Time of 24 metres per second divided by 1.85.

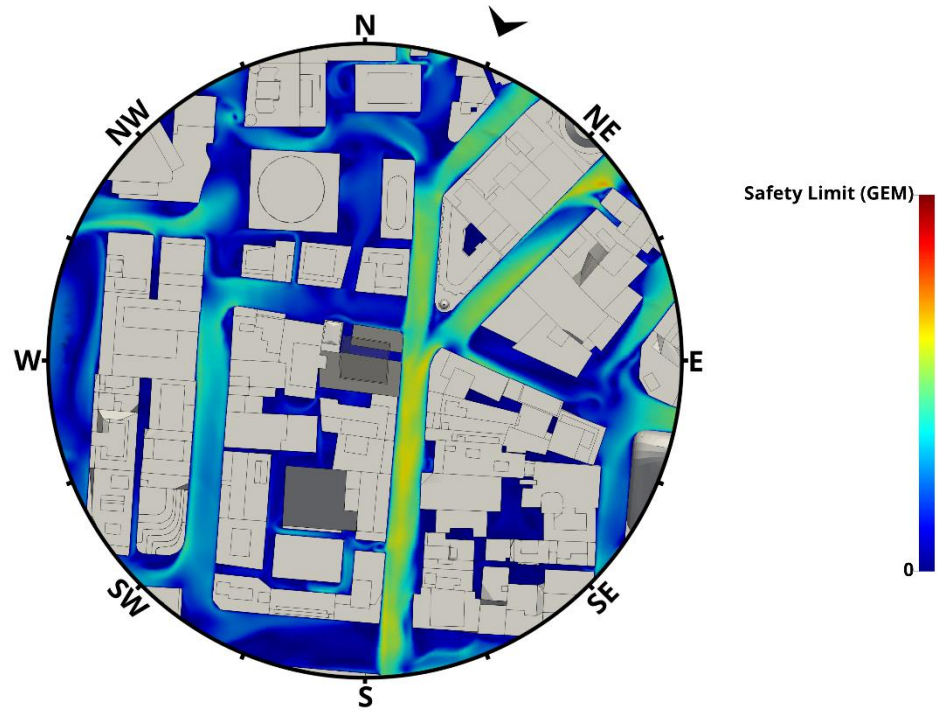


Figure 16: DCP Base Case, North-Northeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

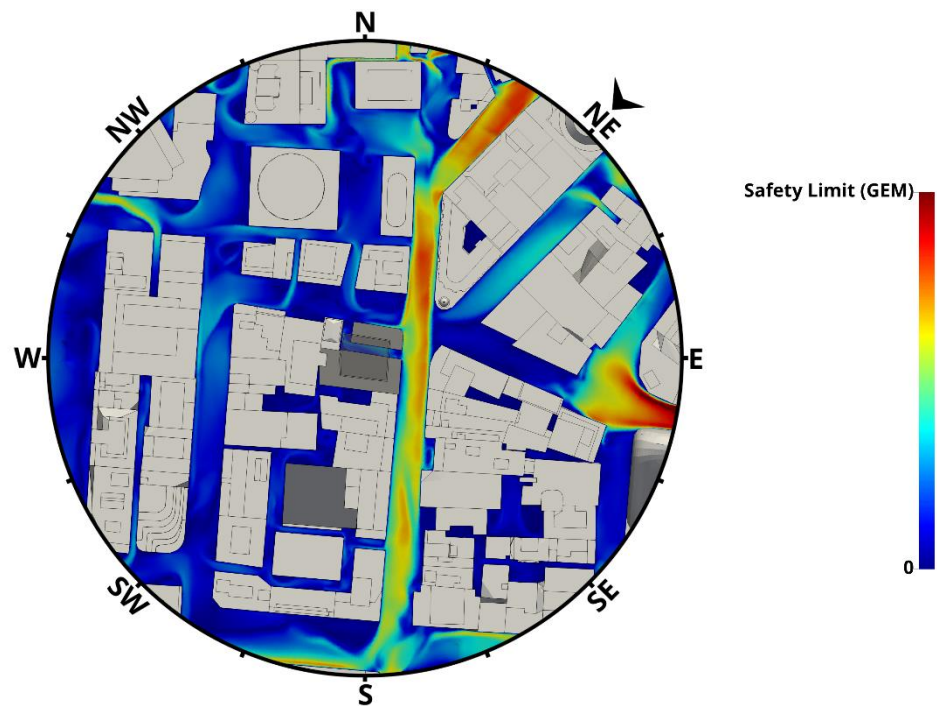


Figure 17: DCP Base Case, Northeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

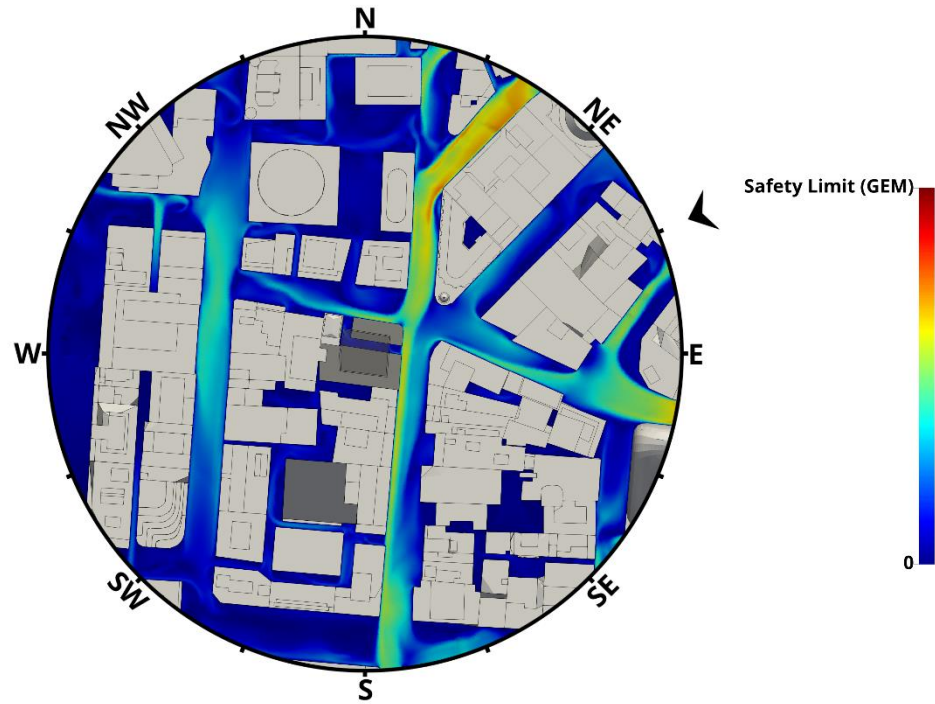


Figure 18: DCP Base Case, East-Northeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

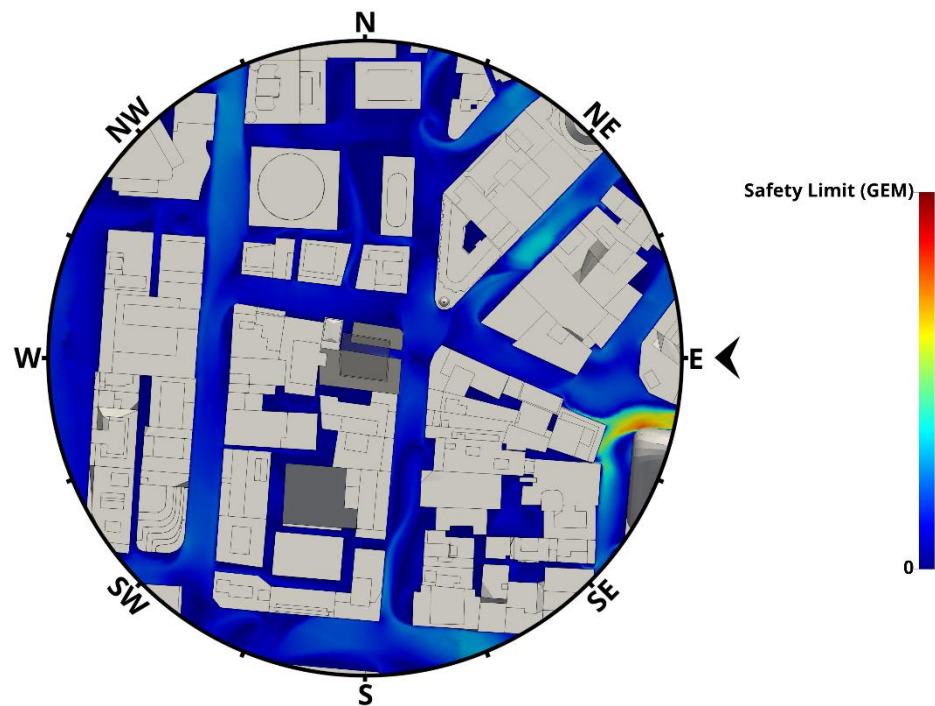


Figure 19: DCP Base Case, East Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

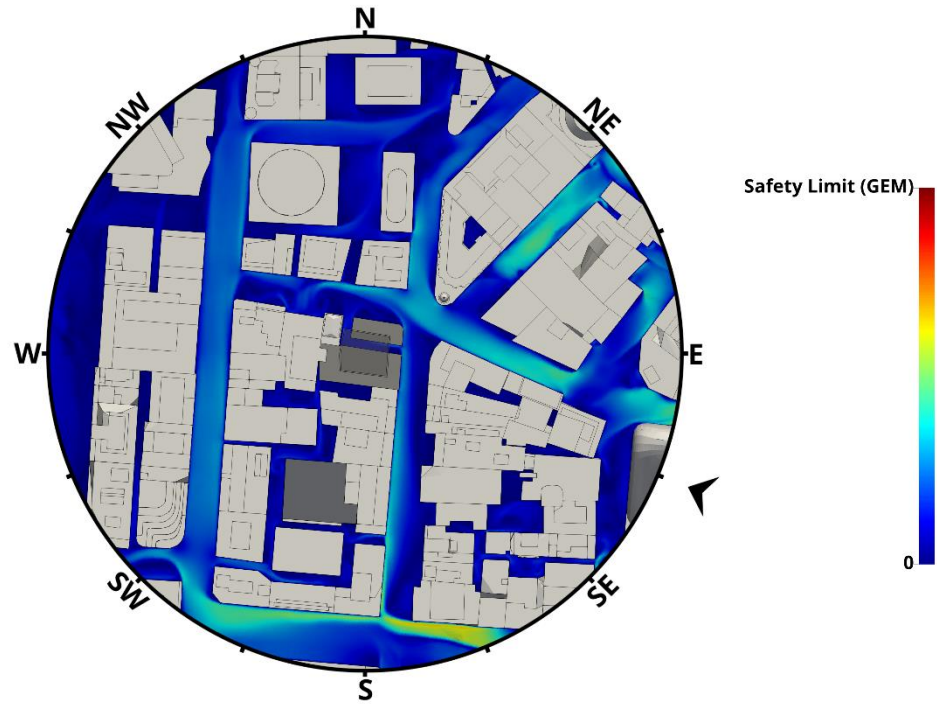


Figure 20: DCP Base Case, East-Southeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

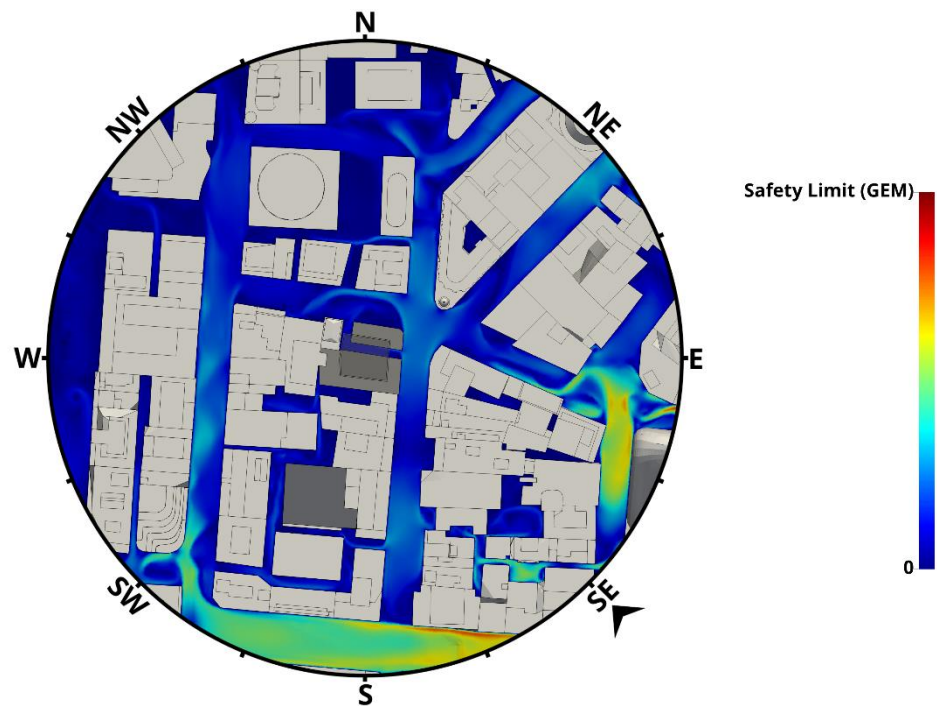


Figure 21: DCP Base Case, Southeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

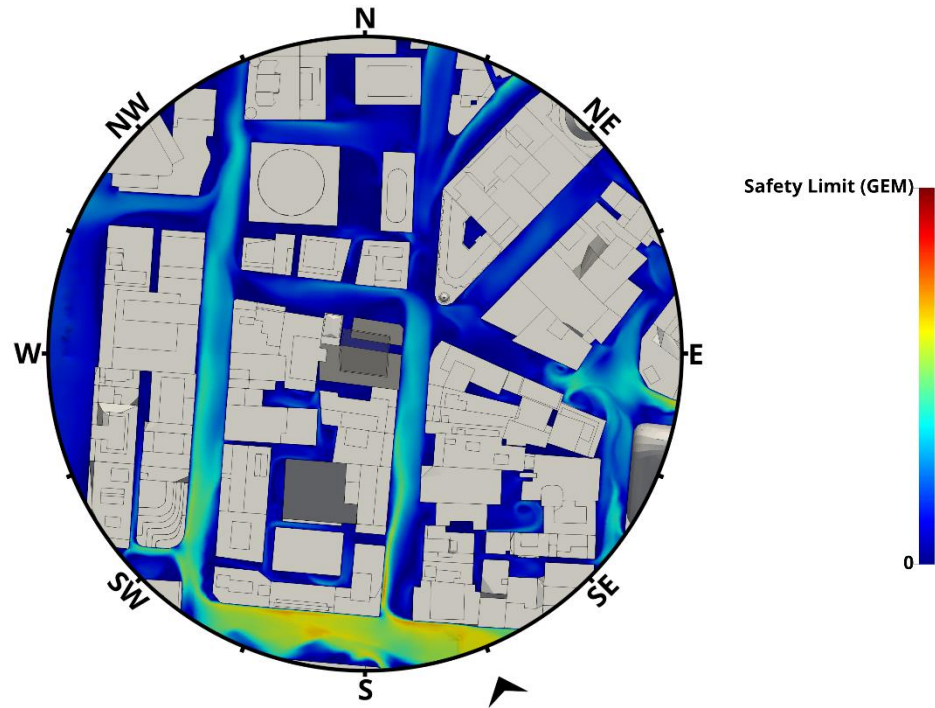


Figure 22: DCP Base Case, South-Southeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

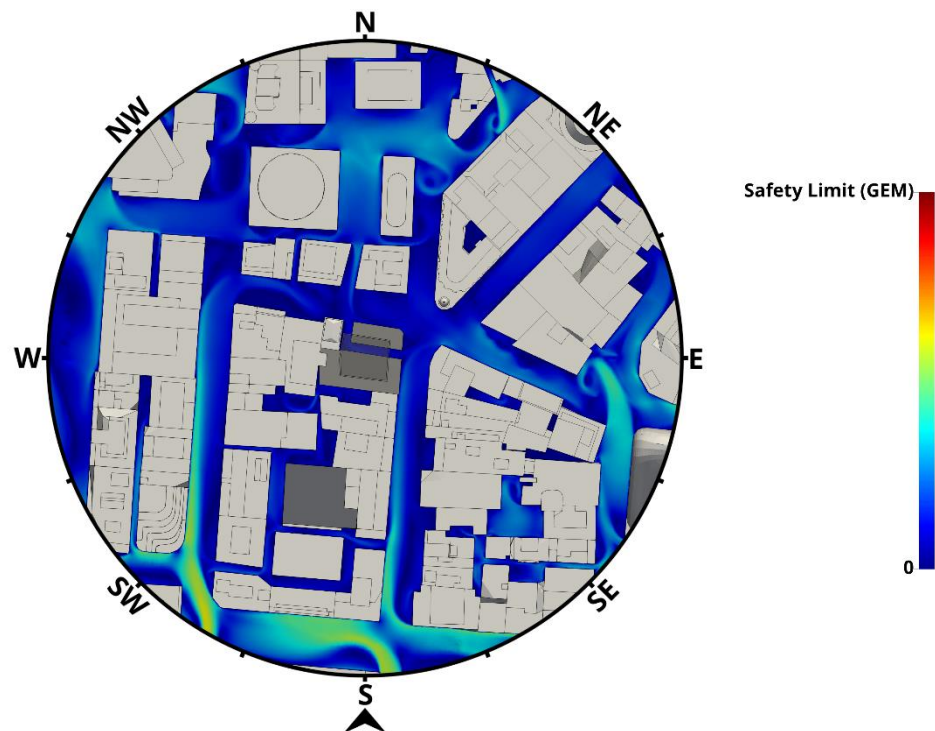


Figure 23: DCP Base Case, South Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

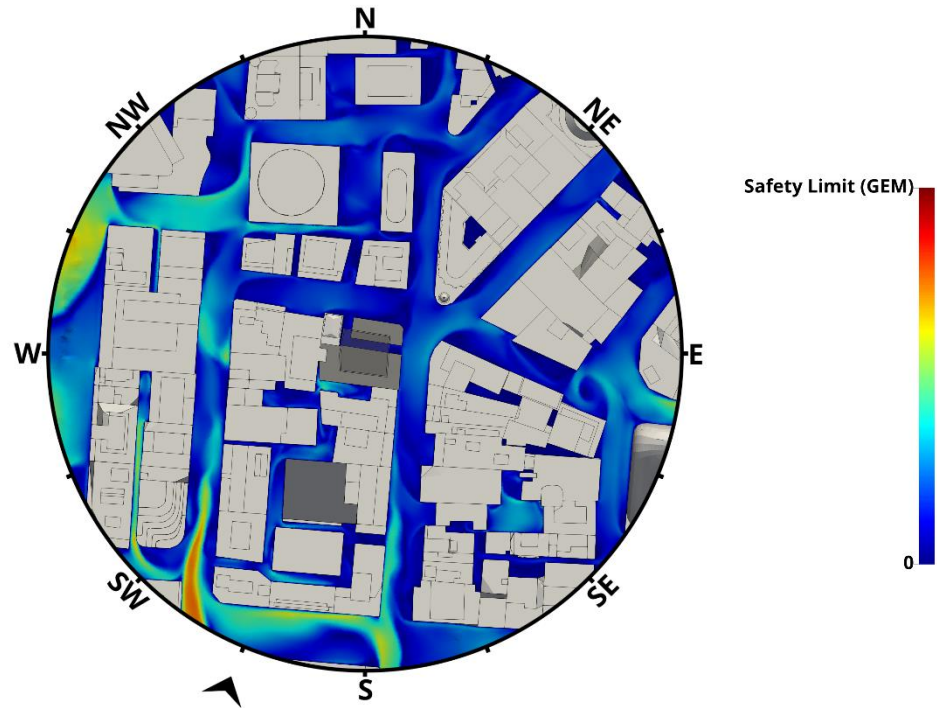


Figure 24: DCP Base Case, South-Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

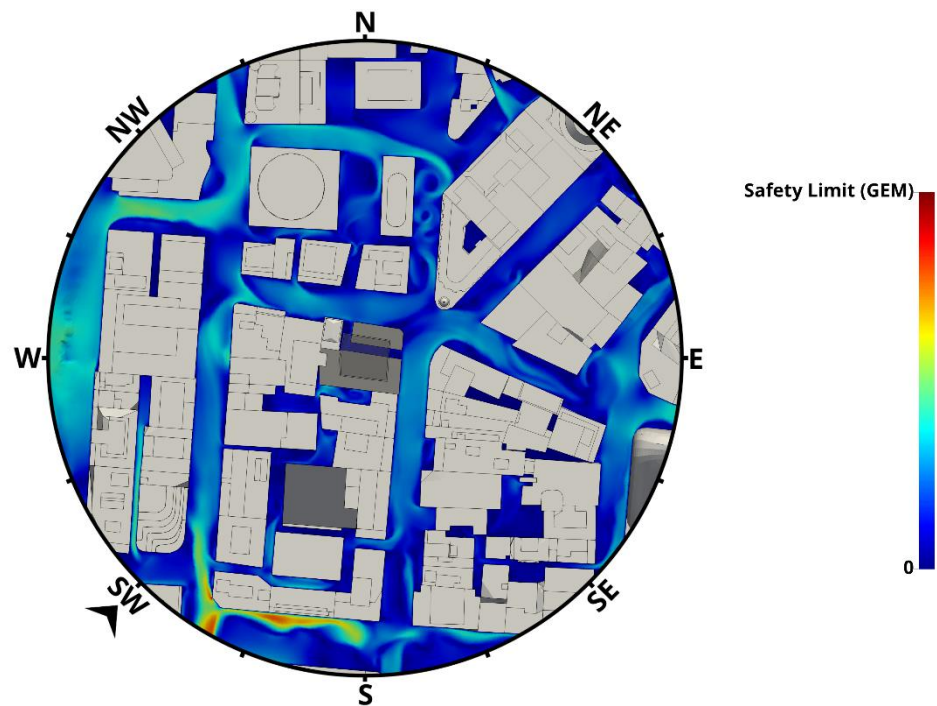


Figure 25: DCP Base Case, Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

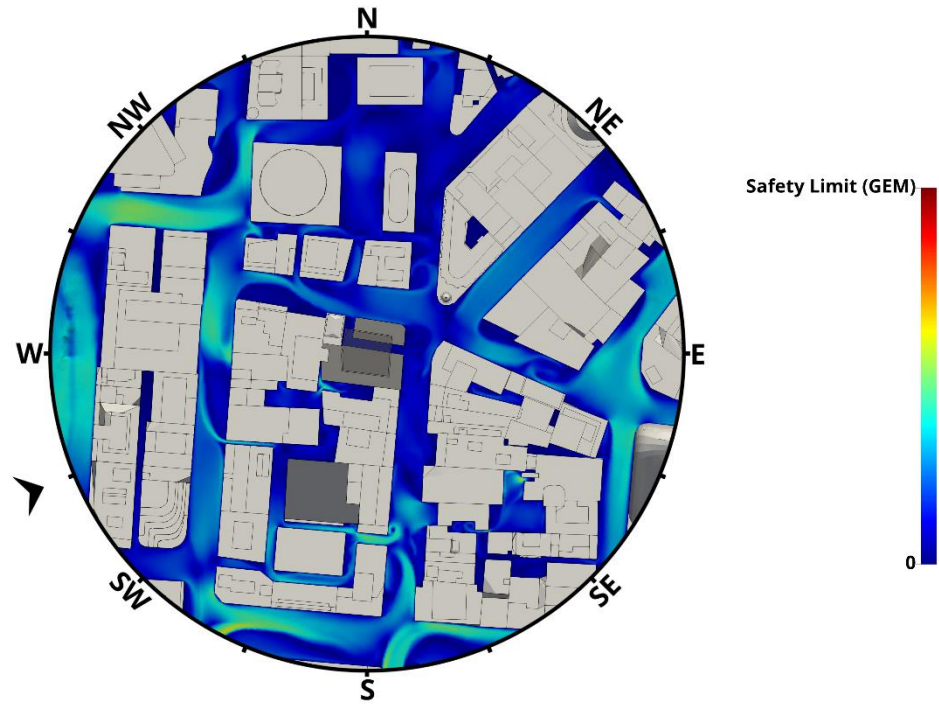


Figure 26: DCP Base Case, West-Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

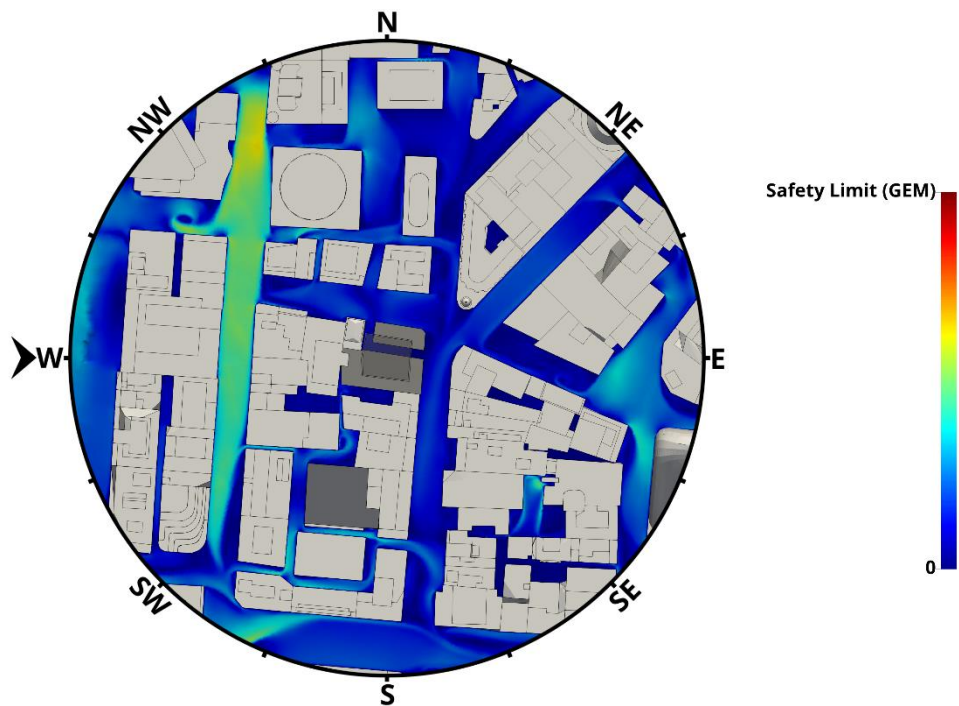


Figure 27: DCP Base Case, West Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

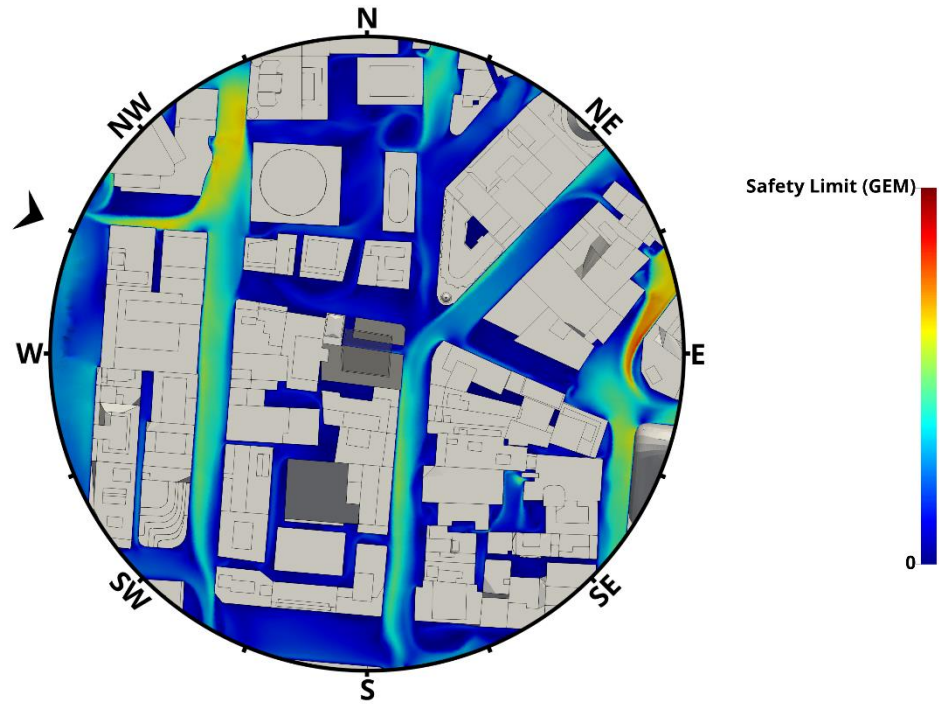


Figure 28: DCP Base Case, West-Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

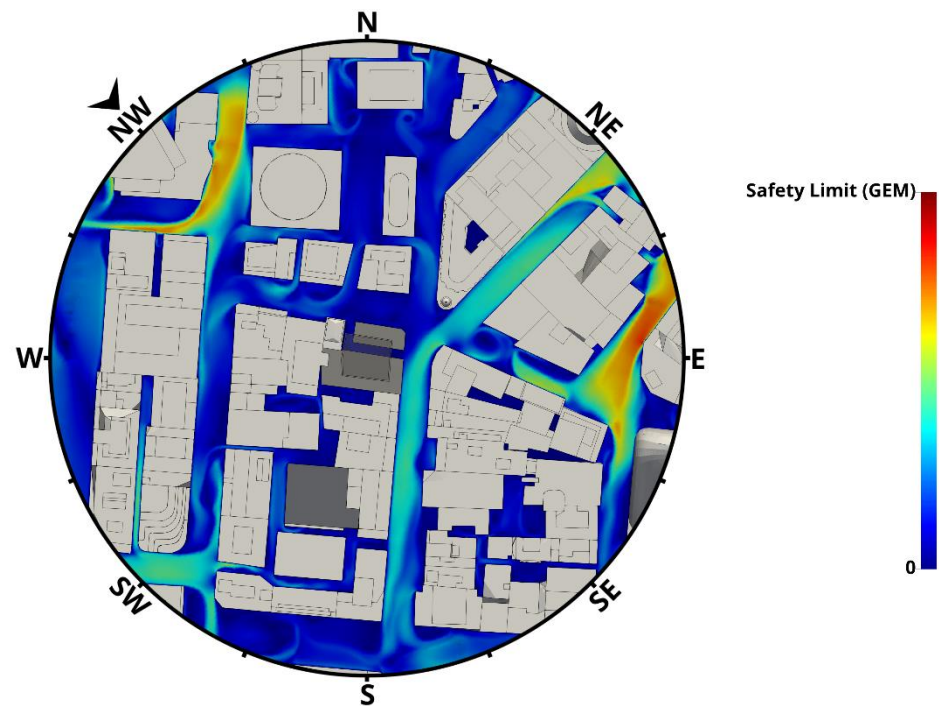


Figure 29: DCP Base Case, Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹


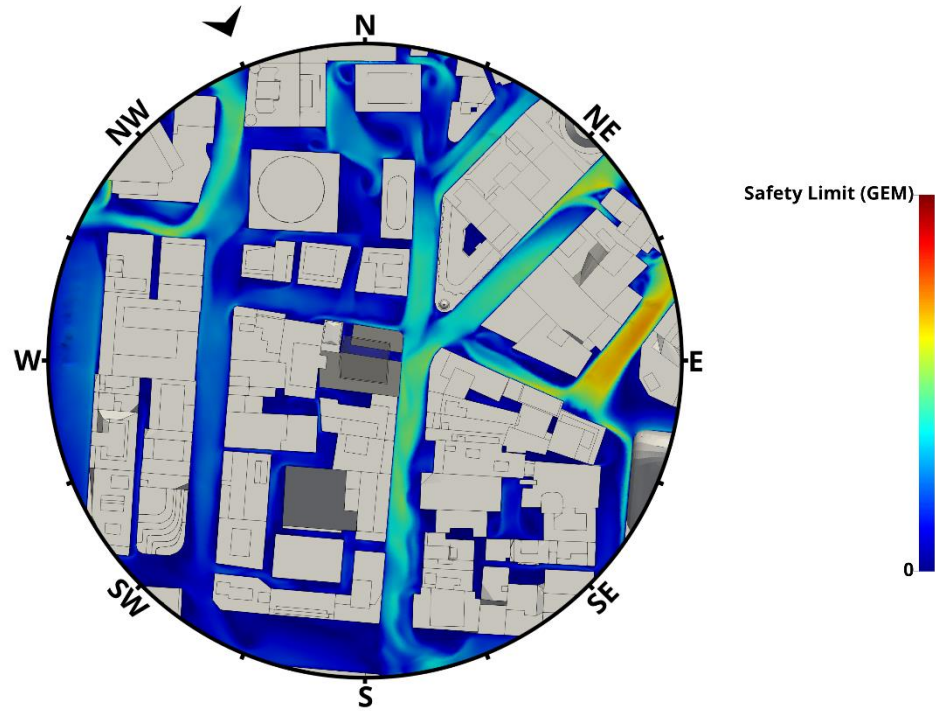


Figure 30: DCP Base Case, North-Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

9.2 PROPOSED

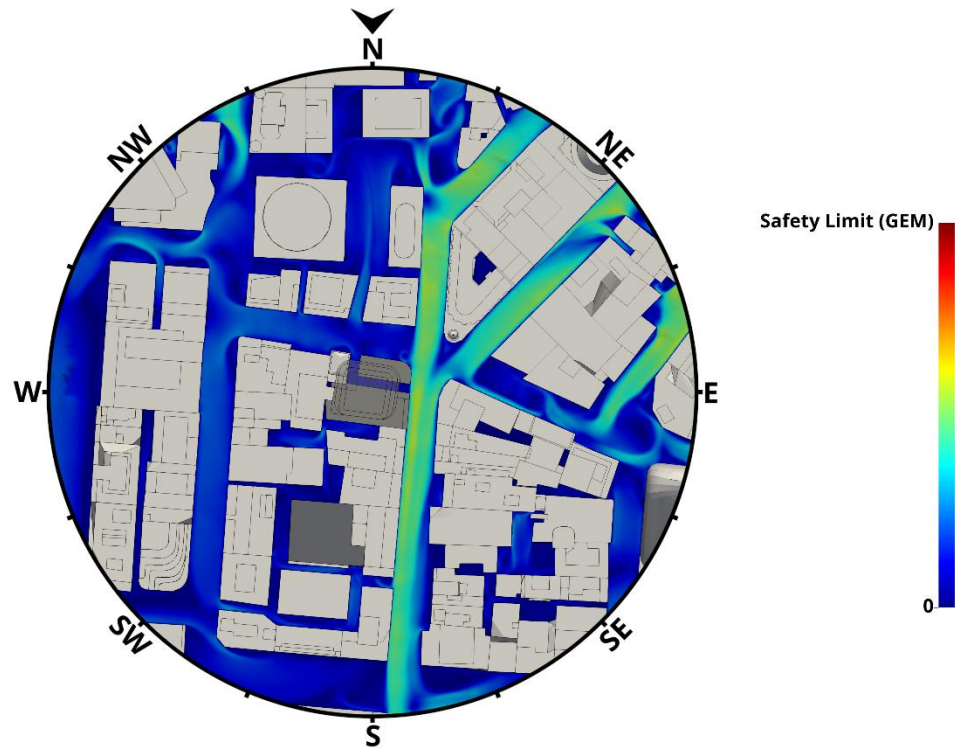

**Figure 31: Proposed, North Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

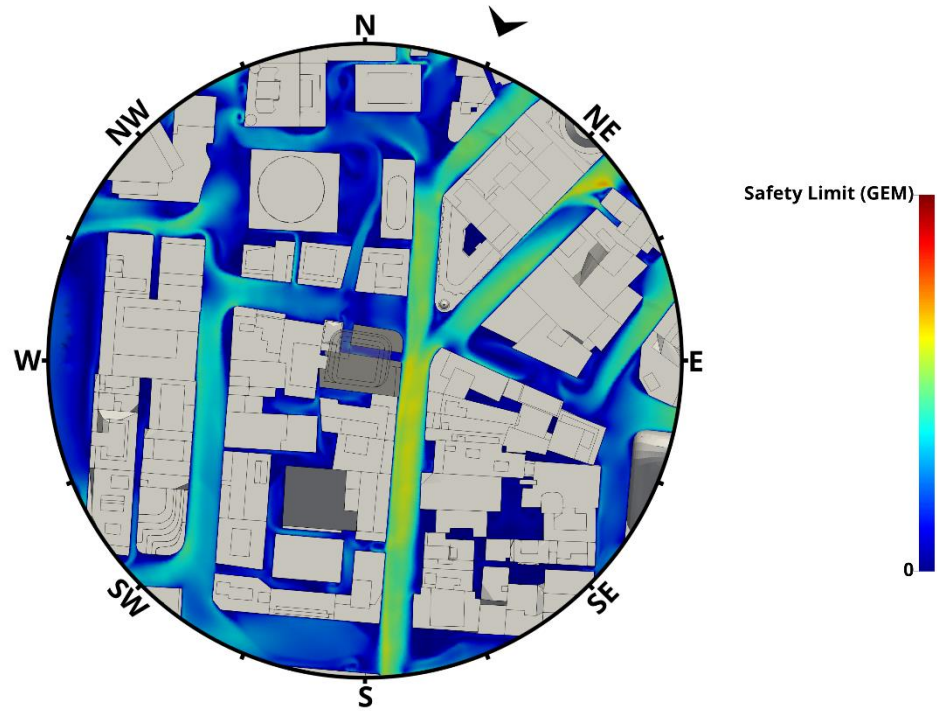


Figure 32: Proposed, North-Northeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹



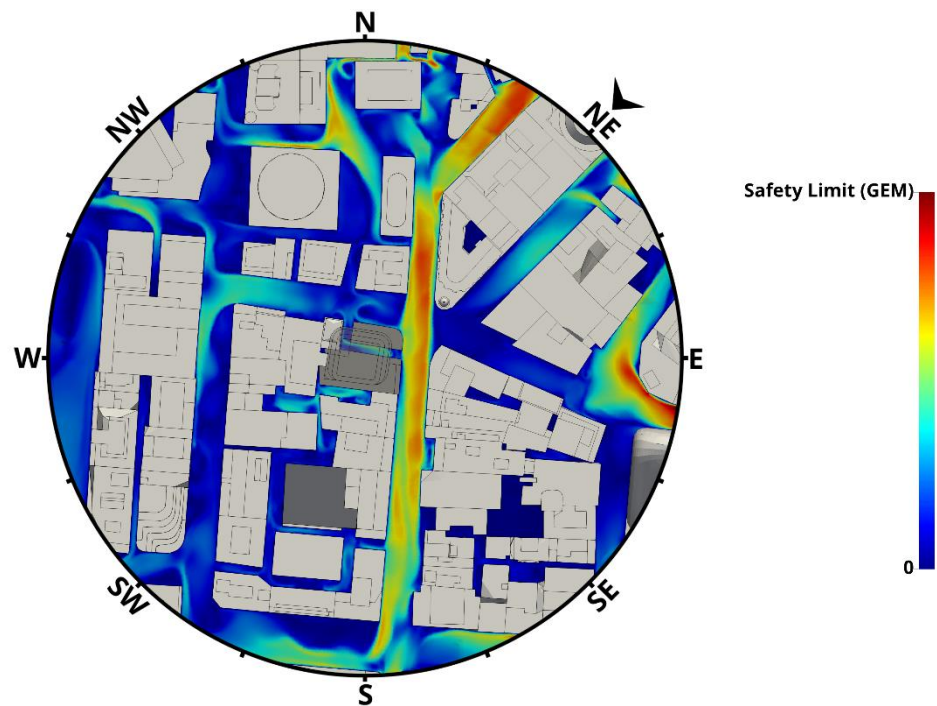



Figure 33: Proposed, Northeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

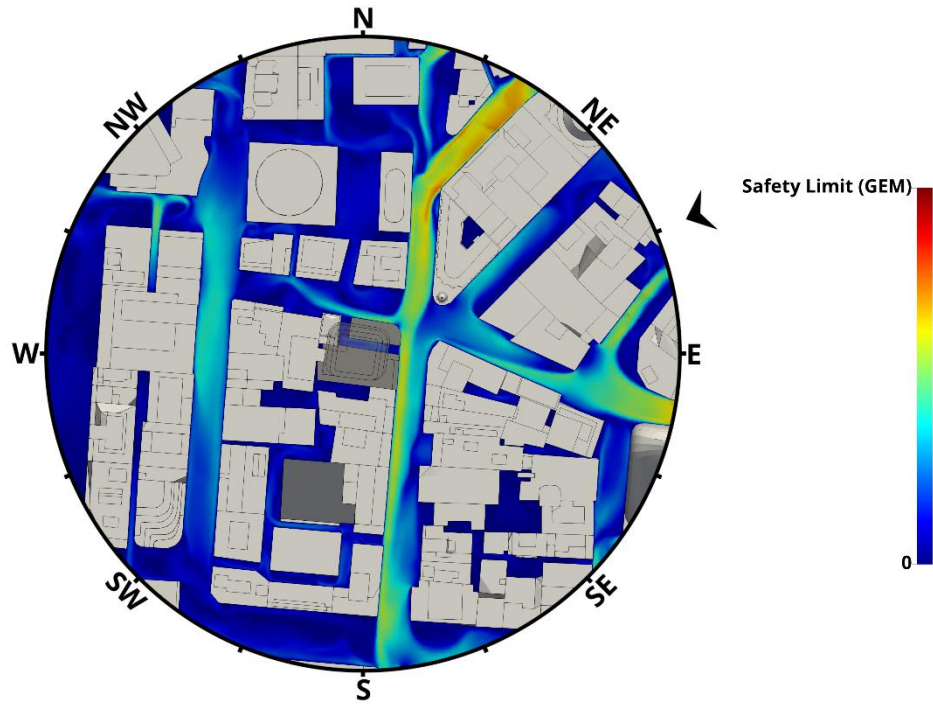


**Figure 34: Proposed, East-Northeast Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

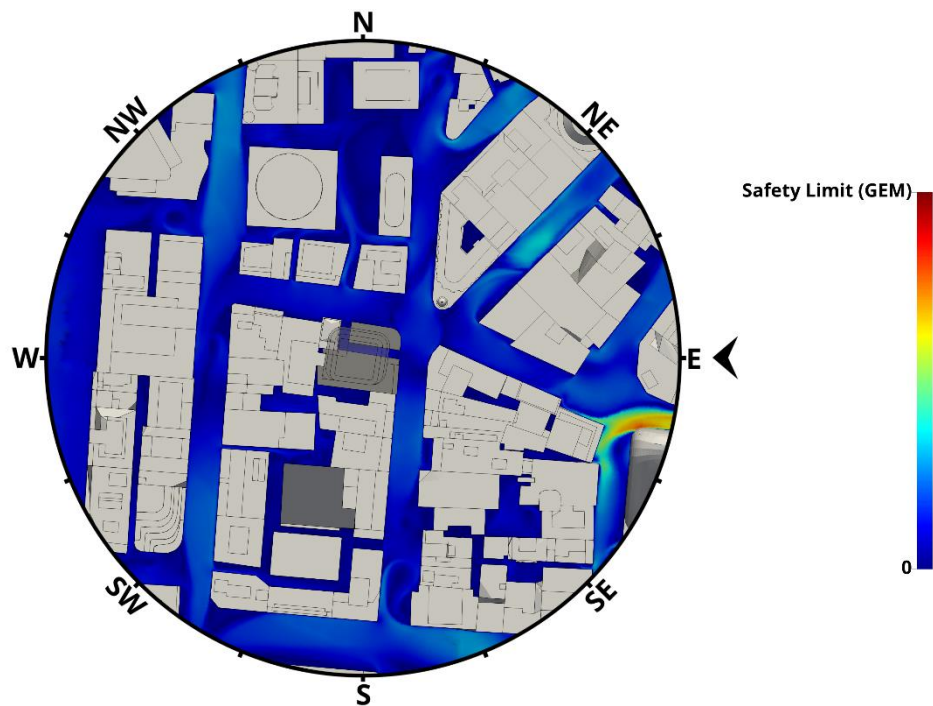

**Figure 35: Proposed, East Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

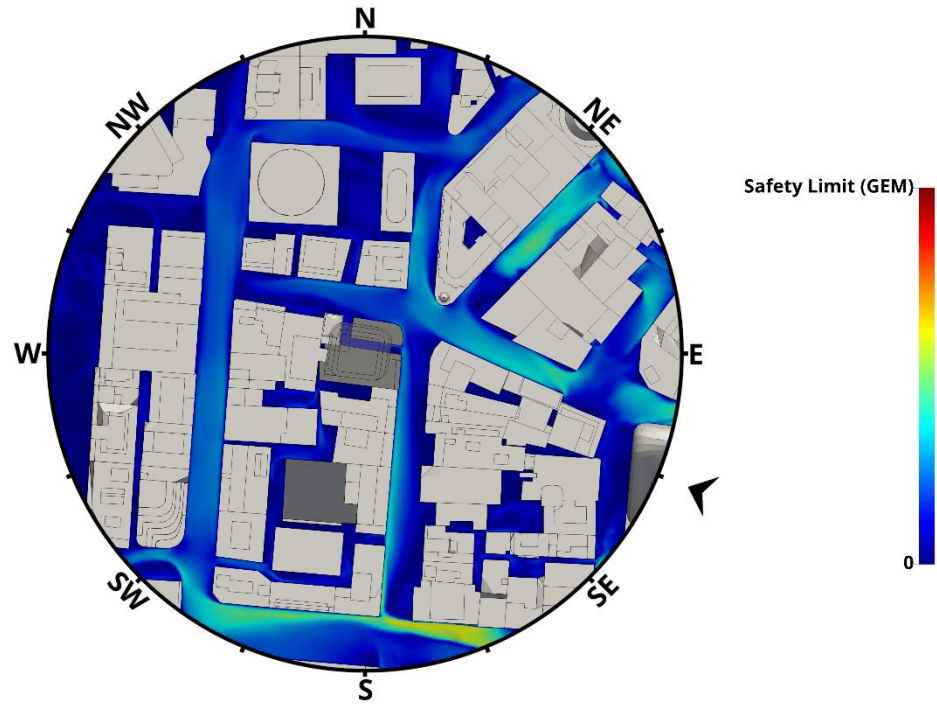

**Figure 36: Proposed, East-Southeast Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

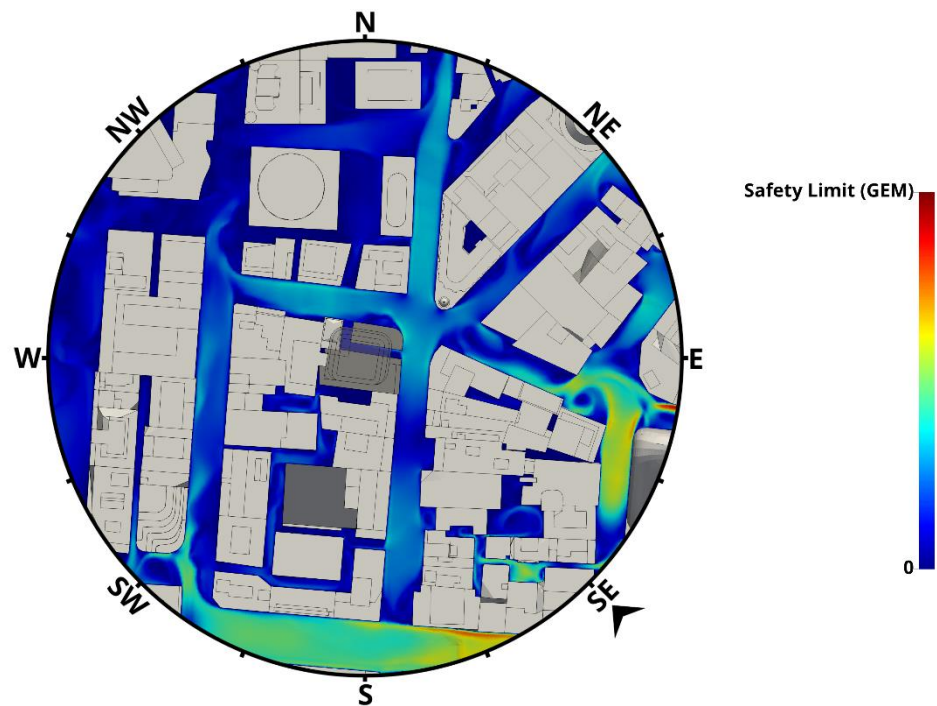

**Figure 37: Proposed, Southeast Wind Direction, Planview, Pedestrian Level
Environmental Wind Speed Contour Plot¹**

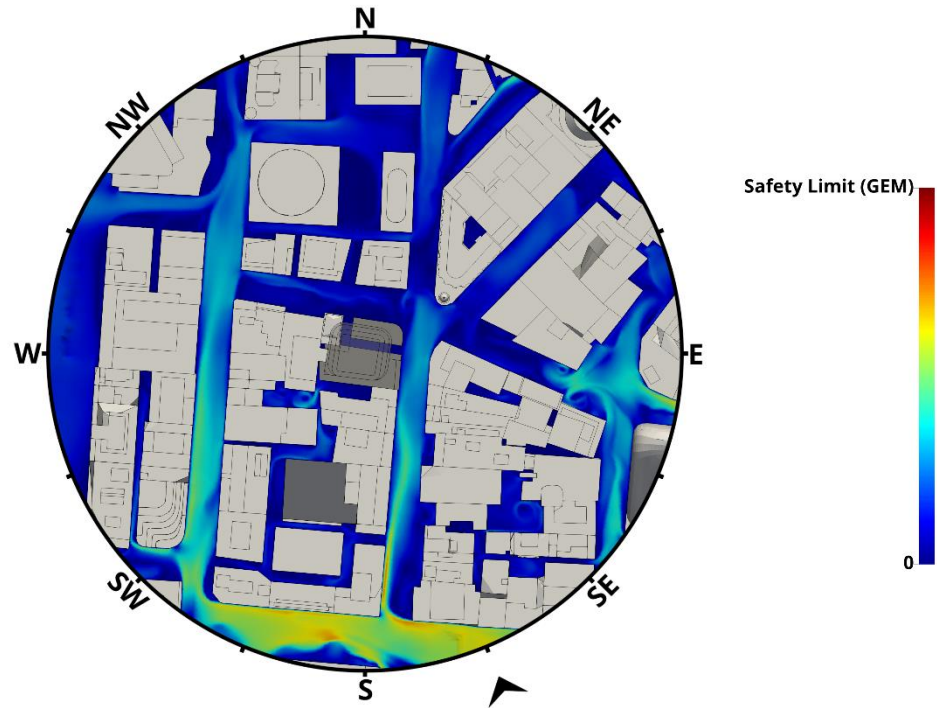


Figure 38: Proposed, South-Southeast Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

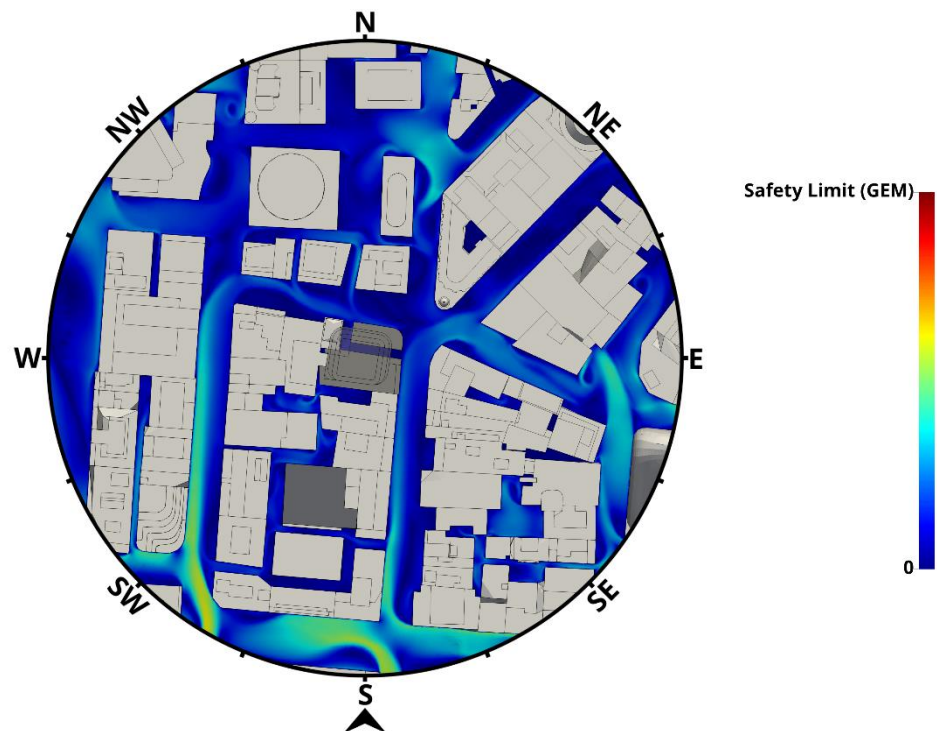


Figure 39: Proposed, South Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

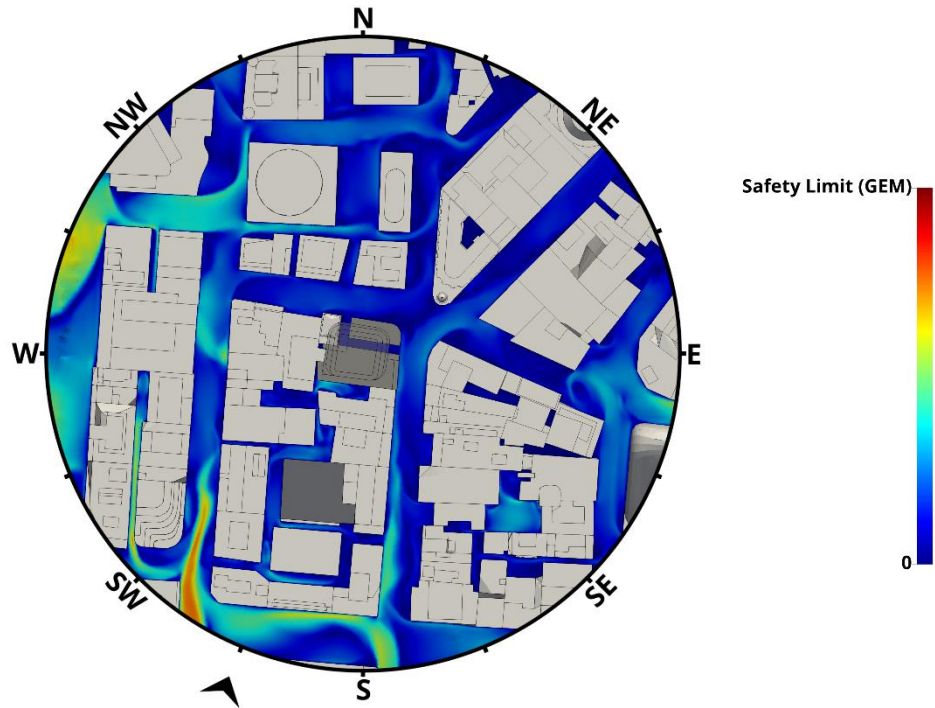


Figure 40: Proposed, South-Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

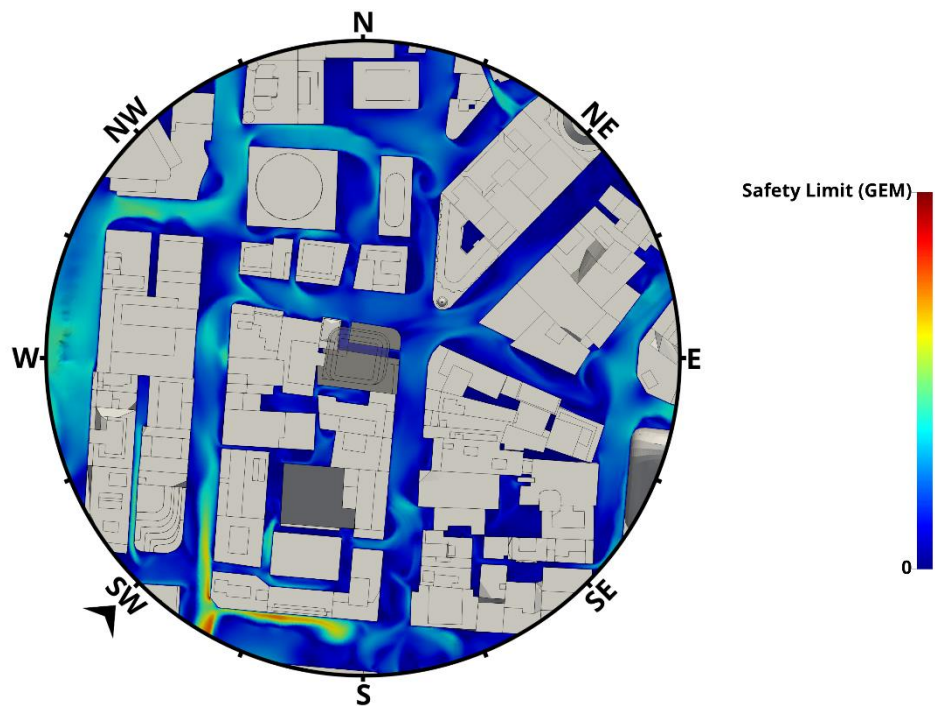


Figure 41: Proposed, Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

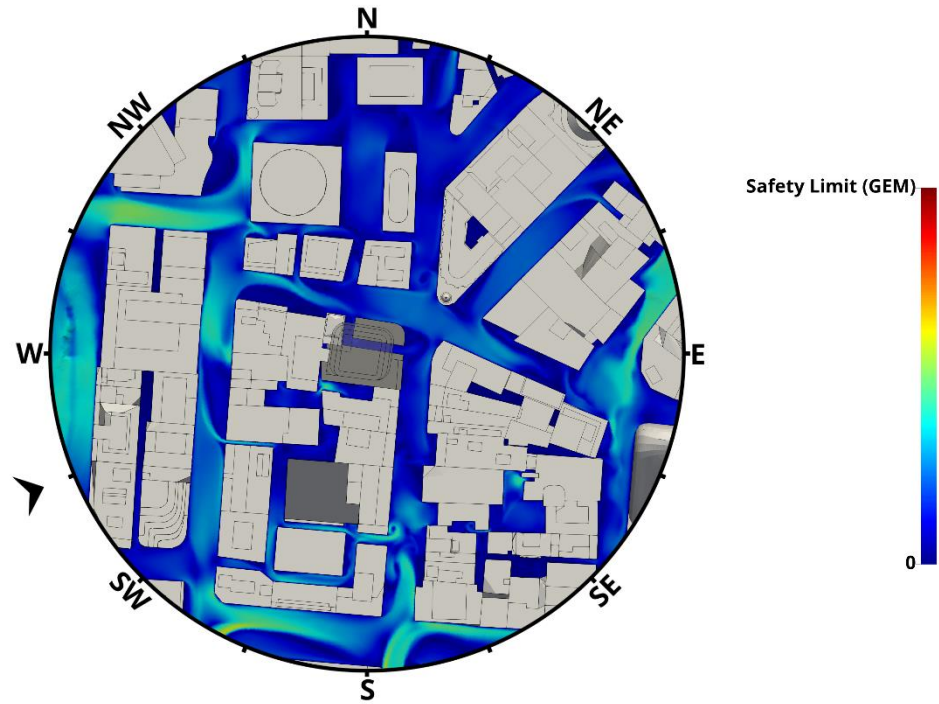


Figure 42: Proposed, West-Southwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

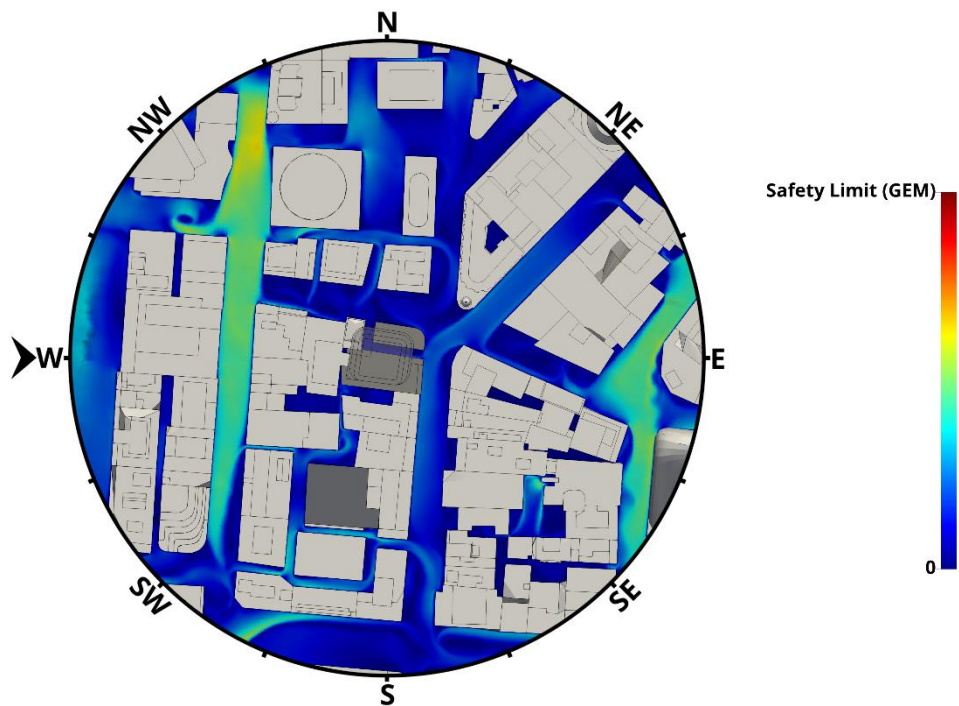


Figure 43: Proposed, West Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

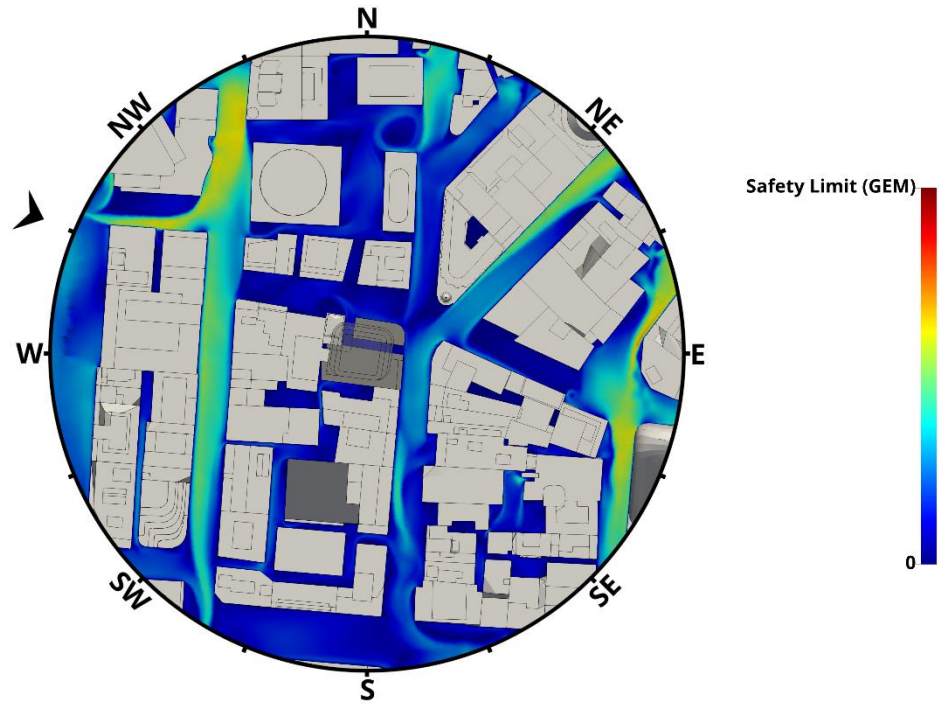


Figure 44: Proposed, West-Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

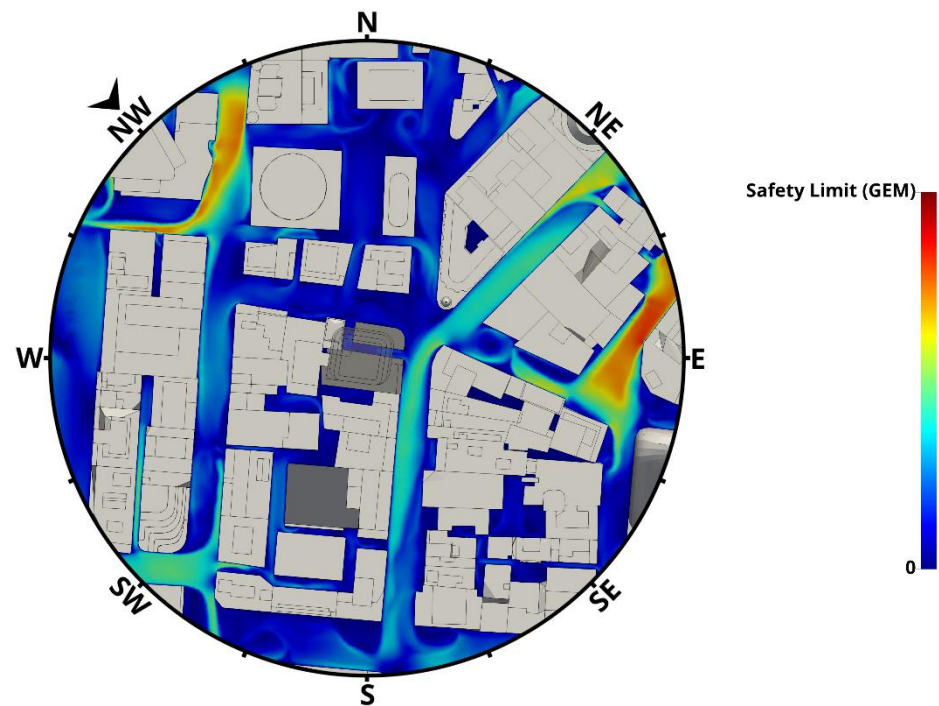


Figure 45: Proposed, Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

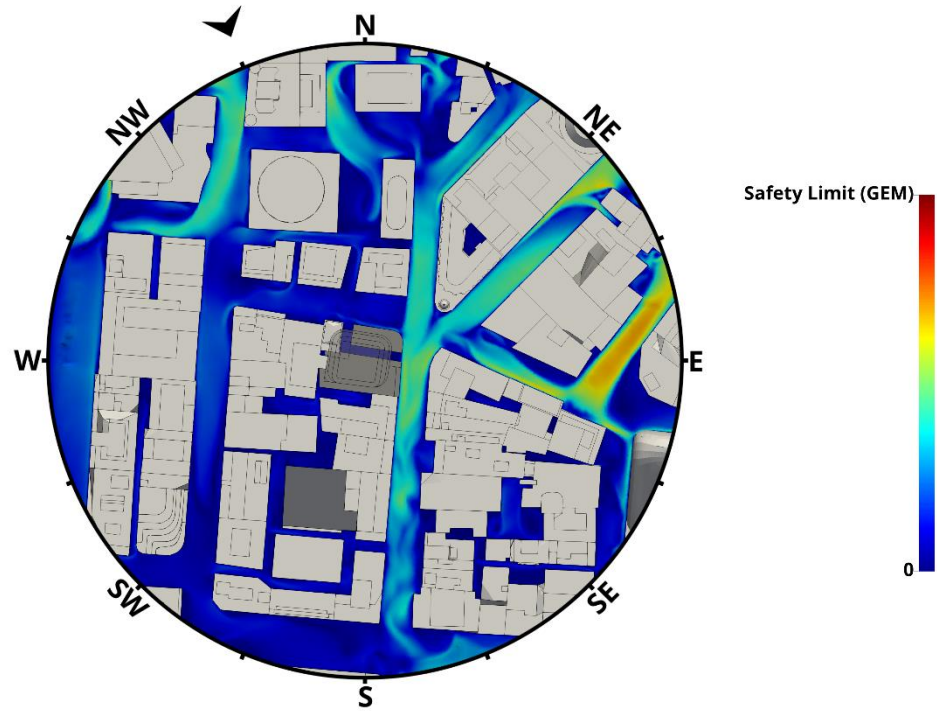


Figure 46: Proposed, North-Northwest Wind Direction, Planview, Pedestrian Level Environmental Wind Speed Contour Plot¹

Attachment A10

Appendix

**Wind Tunnel Testing Report – Dated
26 May 2022 by MEL Consulting**



**22 CLEELAND ROAD
SOUTH OAKLEIGH VIC 3167
AUSTRALIA**

(ACN 004 230 013)

Ref: 94-20-DE-LET-02

26th May 2022

Milligan Group Pty Ltd
321 Riley Street
Surry Hills NSW 2010
Attn: Jarrod White

**15-23 Hunter Street and 105-107 Pitt Street, Sydney
Environmental Wind Conditions Studies**

Environmental Wind Speed Measurements have been conducted by MEL Consultants Pty Ltd in support of a Planning Proposal to amend the *Sydney Local Environmental Plan 2012* (Sydney LEP). This study has been prepared on behalf of Milligan Group Pty Ltd and relates to an amalgamated site at 15-23 Hunter Street and 105-107 Pitt Street.

The results of the wind tunnel model study of the environmental wind conditions for the development have been reported in MEL Consultants Report 94-20-WT-ENV-01 Rev1 dated 11th April 2022. This wind tunnel modelling was based upon the Proposed tower built according to architectural model provided by Bates Smart on 29th September 2021.

As per the requirements of the Sydney DCP the measured wind conditions were measured and compared with respect to the defined wind safety and comfort standards and compared with respect to the Sydney DCP Base Case in terms of achieving an equivalent or better spatially averaged wind speed for the evaluation (as per the methodology outlined in Schedule 12 of the Sydney DCP, Section 12.2, Procedure B)

The results of the wind tunnel study indicated the Proposed development met the relevant wind safety requirements and was shown to achieve a wind comfort speed of 3.89m/s compared to 3.90m/s for the Base configuration at a selected number of Test Location points surrounding the development site.

At the request of City of Sydney an additional study was requested using Computational Fluid Dynamics (CFD) to compare the wind comfort between the Base Case (which now included the internal laneway) and the Proposed Configuration and, if required, refine the built form of the Proposed development to achieve equivalence or better. The evaluation area was agreed to be identical to that utilised for the Sky View Factor (SVF) evaluation area and 16 wind directions were simulated. The CFD study was conducted in May 2022.

The results of the CFD study results in the Proposed Configuration achieving a mean annual wind comfort speed of 2.45m/s compared to 2.47m/s for the DCP Base Case. The figure below presents the result and shows an illustration of the SVF evaluation area used in the CFD study.

ALL WIND DIRECTIONS PEDESTRIAN MEAN ANNUAL WIND COMFORT SPEED
(Averaged over Sky View Area as Requested by City of Sydney)

Averaging Area	DCP Baseline	Proposal
Sky View	2.47m/s	2.45m/s



Yours sincerely,

J. Kostas
MEL Consultants Pty Ltd

Project Name: Planning Proposal - 15-23 Hunter Street and 105-107 Pitt Street, Sydney

Project Description: Amendments to the Sydney Local Environmental Plan 2012 and the Sydney Development Control Plan 2012

Submitted to: City of Sydney Council

On Behalf of: Milligan Group Pty Ltd and its subsidiary FT Sydney Pty Ltd as trustee for FT Sydney Unit Trust.

This Environmental Wind Speed Measurements Report 94-20-WT-ENV-01 has been prepared by MEL Consultants Pty Ltd in support of a Planning Proposal to amend the *Sydney Local Environmental Plan 2012* (Sydney LEP). This report has been prepared on behalf of Milligan Group Pty Ltd (the Proponent) and its related entities and consultants, representatives and agents and FT Sydney Pty Ltd as trustee for FT Sydney Unit Trust. It relates to an amalgamated site at 15-23 Hunter Street and 105-107 Pitt Street (the site).

The purpose of this Planning Proposal is to amend the site's Floor Space Ratio (FSR) development standard, and the Maximum Building Height to align with the Martin Place Sun Access Plane contained within the concurrent Central Sydney Planning Proposal.

This Planning Proposal supports the City of Sydney Council's draft Central Sydney Planning Strategy (Draft CSPA) by unlocking additional employment generating floor space within a designated tower cluster. The proposed Sydney LEP amendment is part of the broader redevelopment plan for the site to facilitate a new commercial office tower. It will also facilitate significant public benefits through additional site activation and embellishment of the public domain.

The Planning Proposal is accompanied by amendments to the Sydney Development Control Plan 2012 (Sydney DCP). The site specific DCP amendments reflect the proposed outcome to provide a podium tower scheme.

This is reflected in the accompanying reference design prepared by Bates Smart which serves as a baseline proof of concept for this Planning Proposal. This 2,108m² strategic site presents a unique opportunity to deliver a landmark premium commercial office tower that will exhibit design excellence and offer significant employment opportunities for global Sydney.

The uplift being sought is consistent with the strategic intent of the draft CSPA, which contains the City's requirements and expectations for projects pursuing this pathway. Following the Planning Proposal, the planning approval pathway involves a competitive design process and a detailed Development Application. As such, this report reflects the concept stage of the proposal, and may be embellished as the detailed design and required works evolve.

ENVIRONMENTAL WIND SPEED MEASUREMENTS ON A WIND TUNNEL MODEL OF THE 15-23 HUNTER STREET AND 105-107 PITT STREET, SYDNEY

**By
E. Chong
&
J. Kostas**

SUMMARY

Wind tunnel tests have been conducted on a 1/400 scale model of the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney. The model of the Development within surrounding buildings was tested in a simulated upstream boundary layer of the natural wind to determine likely environmental wind conditions. These wind conditions have been related to the Sydney Design Control Plan 2012 and assessed with respect to the Safety standard as well as the Walking, Standing and Sitting comfort standards.

The ground level wind conditions in the surrounding streetscapes and within the development for the Proposed Configuration have been shown to satisfy the standing comfort standard for all Test Locations, with many locations satisfy the sitting comfort standard. The wind comfort standard achieved has been shown to be generally similar for all configurations.

The ground level wind conditions for the Existing Configuration have been presented at all Test Locations for comparison.

For the Proposed Configuration, the wind conditions on the Podium Terrace of the development have been shown to be within the sitting comfort standards. However the wind conditions on the Rooftop Terrace have been shown to fail the safety standard at Test Locations R1 and R3.

Wind mitigation strategies have been developed for the Rooftop Terrace and have been shown to improve the wind conditions to meet the safety criterion at all Test Locations on the roof top terraces as well as meeting the standing and/or sitting comfort standards at these Test Locations.

The wind conditions at all Test Locations on the ground, podium, and rooftop levels (with mitigation strategies) have been shown to satisfy the safety standard.



Report 94-20-WT-ENV-01 Rev1

**15-23 HUNTER STREET & 105-107 PITT STREET, SYDNEY
ENVIRONMENTAL WIND TUNNEL MODELLING**

MEL CONSULTANTS REPORT NO:

94-20-WT-ENV-01 Rev1

PREPARED FOR:

Milligan Group Pty Ltd
321 Riley Street
Surry Hills
NSW 2010

PREPARED BY:

MEL Consultants Pty Ltd
22 Cleeland Road
South Oakleigh VIC 3167

Contact: Jarrod White

Ph: +61 408 557 756

Contact: J. Kostas

Ph: +61 3 8516 9680

PREPARED BY:



E. Chong
Engineer

Date: 17 January 2022


REVIEWED BY:



J. Kostas
Director

Date: 14 February 2022

RELEASED BY:



M. Eaddy
Managing Director

Date: 14 February 2022

REVISION HISTORY

Revision No:	Date Issued	Reason/Comment
0	14 February 2022	Initial issue
1	29 March 2022	Amended test locations

DISTRIBUTION

Copy No: 1

Copy	Location	Type
1	Milligan Group Pty Ltd	Electronic PDF
2	MEL Consultants – Report Library	Hardcopy
3	MEL Consultants – Report Library	Hardcopy
4	MEL Consultants – Project File	Hardcopy

NOTE: This is a controlled document within the document control system. If revised, it must be marked SUPERSEDED and returned to the MEL Consultants Pty Ltd contact.

CONTENTS

SUMMARY

1.	INTRODUCTION	- 5 -
2.	ENVIRONMENTAL WIND CRITERIA	- 7 -
3.	MODEL AND EXPERIMENTAL TECHNIQUES.....	- 9 -
4.	DISCUSSION OF RESULTS.....	- 10 -
4.1	Summary of Results	- 10 -
4.2	Pitt Street.....	- 11 -
4.3	Hunter Street	- 13 -
4.4	George Street.....	- 15 -
4.5	Laneway.....	- 16 -
4.6	Average Pedestrian Level Wind Speeds.....	- 18 -
4.7	Podium Terrace.....	- 19 -
4.8	Rooftop Terrace	- 20 -
5.	CONCLUSIONS	- 22 -
	REFERENCES.....	- 24 -
	FIGURES	- 25 -

APPENDIX A

1. INTRODUCTION

The proposed development at 15-23 Hunter Street and 105-107 Pitt Street will be located on the corner of Hunter and Pitt Street in the central zone of the Sydney CBD.

The immediate surrounding terrain is dominated by high-rise commercial buildings of Sydney CBD and in the far field the surrounding terrain includes suburban housing and the open waters of Circular Quay and Darling Harbour, as shown in Figure 1.



Figure 1. Location of the development site within the context of the Sydney CBD. A 300m radius centred around the site is indicated in the figure.

A previous wind tunnel model study of the Existing Configuration, Base Case Envelope, and Proposed Configuration (May 2020) of 15-23 Hunter Street and 105-107 Pitt Street Development was carried out in May 2020. The result of this study is presented in MEL Report 94-20-WT-ENV-00 Rev.2.

Milligan Group Pty Ltd has commissioned another wind tunnel study to provide environmental wind conditions in and around a new updated Proposed Configuration of the 15-23 Hunter Street and 105-107 Pitt Street Development, and if required, to develop wind amelioration features to achieve conditions satisfying the target environmental wind criteria. These tests were carried out in the MEL Consultants 400kW Boundary Layer Wind Tunnel during December, 2021.

2. ENVIRONMENTAL WIND CRITERIA

The advancement of wind tunnel testing techniques, using large boundary layer flows to simulate the natural wind, has facilitated the prediction of wind speeds likely to be induced around a development. To assess whether the predicted wind conditions are likely to be acceptable or not, some form of criteria are required. The Sydney Design Control Plan (2012) has defined wind comfort standards for the assessment of the wind conditions in Sydney City. The definition of the standards is as follows:

Wind Safety Standard is an annual hourly maximum peak 0.5 second gust wind speed measured between 6am and 10pm Eastern Standard Time of 24 meters per second.

Wind Comfort Standard is an hourly mean wind speed for each wind direction, with probability of exceedance less than 5% per annum (averaged over all wind directions) measured between 6am and 10pm Eastern Standard Time (equivalent to 292 hours per annum), of equal to or less than:

- 4 metres/second for sitting areas
- 6 metres/second for standing areas
- 8 metres/second for walking areas

Mean wind speed means the maximum of:

- Hourly mean wind speed, or
- Gust equivalent mean wind speed (gust wind speed divided by 1.85)

It is noted that the above Safety standard is assessed for each wind direction while the above Comfort standards are pass/fail criteria as they only assess the summation of probabilities of exceedance across all wind directions to determine whether a location passes or fails the threshold criterion. There may be cases that the Test Locations pass the all directions combined criterion but still fail the same criterion when applied correctly for a particular wind direction. For completeness, this report will provide data for each Test Location as a function of wind direction in Appendix A.

The Sydney DCP uses the definition of mean wind speed as based on the hourly wind speed so the probabilities will be determined from the hourly wind data for an applicable automatic weather station for the City of Sydney. The probability data used have been corrected for the approach terrain at the location of the automatic weather station (in this case Sydney Airport) and referenced to 10m in Terrain Category 2. This is the standard reference height of AS/NZS1270.2:2011.

3. MODEL AND EXPERIMENTAL TECHNIQUES

A 1/400 scale model of the proposed 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney was constructed from digital 3D model provided by Bates Smart Architects on 29 September 2021.

The scale model of the development and surrounding buildings was tested in a model of the natural wind generated by flow over roughness elements augmented by vorticity generators at the beginning of the wind tunnel working section. The surrounding buildings include all built and under construction buildings in the immediate vicinity. The basic natural wind model was for flow over suburban terrain, the characteristics of which are given in Figure 2. The surrounding wind tunnel model of all significant buildings, out to a minimum radius of 300m, modified the approach wind model for the presence of the surrounding buildings.

The techniques used to investigate the environmental wind conditions and the method of determining the local criteria are given in detail in Reference 2. In these tests measurements in the Development areas are inside separated regions and peak velocity squared ratios were required to make conclusions about likely wind conditions. In summary, measurements were made of the peak gust wind velocity with a hot wire anemometer at various stations and expressed as a squared ratio with the mean wind velocity at a scaled reference height of 300m. This gives the peak velocity squared ratio

$$\left(\hat{V}_{\text{local}}/\bar{V}_{300\text{m}}\right)^2$$

as shown in Figure A1.

Wind tunnel velocity measurements were made for an equivalent 1 hour period in full scale and filtered to provide an equivalent full scale 3 second gust wind speed. Photographs of the models as tested in the wind tunnel are shown for each of the configurations in Figures 3 and 4.

4. DISCUSSION OF RESULTS

Velocity measurements were made at various locations around the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney for different wind directions at 22.5° intervals for the **Proposed Configuration** (Preferred Building Envelope).

For comparison purposes the results will be presented for the following model configurations:

- **Existing Configuration**
- **Base Case Configuration** (Schedule 11 Scheme)

As discussed in Section 2, the Sydney Design Control Plan wind comfort criteria are pass/fail criteria based on an assessment of the summation of probabilities for all wind directions combined. Therefore, to assess the wind conditions the exceedances will be presented in tabular form in Tables 1 – 7. For completeness these data are also provided in Appendix A as a function of wind direction and compared with the pedestrian criteria based on gust wind speeds. The Ground and Upper Levels Terrace are shown in Figures 5a to 5d. The following sections detail the results for the various areas tested.

4.1 Summary of Results

To assist with the assessment of the wind conditions, summaries of the wind criteria achieved for all wind directions at each Test Location in the surrounding streetscapes, and terraces have been provided using a colour code system in the following figures:

Existing Configuration	Figure 6
Base Case Configuration	Figure 7
Proposed Configuration	Figures 8 to 11
Proposed Configuration with mitigation	Figure 12

Different colours have been used to represent the wind criteria achieved at each test location.

4.2 Pitt Street

The wind conditions along Pitt Street for the Proposed Configuration have been shown to satisfy the sitting comfort standard at all presented Test Locations. The wind comfort standard achieved at all Test Locations has been shown to be similar for the Existing Configuration, Base Case Envelope and Proposed Configuration.

The wind conditions for the Existing Configuration and Base Case Envelope, have been presented for all Test Locations for comparison. The standards satisfied have been presented in Table 1.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 1: Pedestrian Wind Comfort and Safety – Pitt Street

Test Location	Configuration	Wind Comfort Standard			Safety	wind speed
		Sitting	Standing	Walking		
3	Existing	2.35%	0.14%	0.00%	Pass	3.65
	Base Case	3.14%	0.24%	0.02%	Pass	3.94
	Proposed	2.76%	0.15%	0.00%	Pass	3.98
4	Existing	0.20%	0.00%	0.00%	Pass	2.69
	Base Case	0.48%	0.02%	0.00%	Pass	2.81
	Proposed	0.64%	0.03%	0.00%	Pass	3.07
5	Existing	0.30%	0.00%	0.00%	Pass	2.47
	Base Case	1.72%	0.12%	0.01%	Pass	3.38
	Proposed	3.69%	0.37%	0.01%	Pass	3.94
6	Existing	0.97%	0.05%	0.00%	Pass	3.12
	Base Case	1.08%	0.05%	0.00%	Pass	3.16
	Proposed	1.07%	0.05%	0.00%	Pass	3.27
7a	Existing	1.87%	0.20%	0.01%	Pass	3.21
	Base Case	1.49%	0.12%	0.00%	Pass	3.17
	Proposed	2.94%	0.42%	0.03%	Pass	3.65
8	Existing	2.17%	0.28%	0.01%	Pass	3.49
	Base Case	1.50%	0.11%	0.00%	Pass	3.26
	Proposed	3.55%	0.68%	0.06%	Pass	3.70
9	Existing	1.29%	0.06%	0.00%	Pass	3.45
	Base Case	0.73%	0.02%	0.00%	Pass	3.30
	Proposed	1.47%	0.07%	0.00%	Pass	3.51
10	Existing	0.89%	0.03%	0.00%	Pass	3.45
	Base Case	4.31%	0.39%	0.05%	Pass	4.09
	Proposed	3.67%	0.45%	0.02%	Pass	4.06
11	Existing	0.50%	0.00%	0.00%	Pass	2.74
	Base Case	0.25%	0.00%	0.00%	Pass	2.62
	Proposed	0.72%	0.01%	0.00%	Pass	3.02
all Pitt St	Existing	1.17%	0.09%	0.00%	average	3.14
	Base Case	1.63%	0.12%	0.01%		3.30
	Proposed	2.28%	0.25%	0.02%		3.58

4.3 Hunter Street

The wind conditions for the Proposed Configuration along Hunter Street have been shown to satisfy the standing comfort standard at all Test Locations, with conditions at most Test Locations also satisfying the sitting comfort standard.

The wind conditions for the Existing Configuration and Base Case Envelope, have been presented for all Test Locations for comparison. The standards satisfied have been presented in Table 2.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 2: Pedestrian Wind Comfort and Safety – Hunter Street

Test Location	Configuration	Wind Comfort Standard			Safety	wind speed
		Sitting	Standing	Walking		
15	Existing	4.84%	1.19%	0.27%	Pass	4.39
	Base Case	4.64%	0.99%	0.20%	Pass	4.37
	Proposed	4.95%	0.99%	0.19%	Pass	4.48
16	Existing	7.11%	2.47%	0.82%	Pass	4.84
	Base Case	6.37%	1.87%	0.52%	Pass	4.64
	Proposed	6.73%	1.85%	0.46%	Pass	4.76
18	Existing	1.89%	0.16%	0.01%	Pass	3.44
	Base Case	2.03%	0.18%	0.01%	Pass	3.61
	Proposed	1.73%	0.11%	0.01%	Pass	3.61
19	Existing	1.77%	0.21%	0.01%	Pass	3.19
	Base Case	0.96%	0.05%	0.00%	Pass	3.01
	Proposed	2.35%	0.17%	0.01%	Pass	3.30
21	Existing	0.27%	0.00%	0.00%	Pass	2.71
	Base Case	1.90%	0.14%	0.01%	Pass	3.41
	Proposed	1.36%	0.08%	0.00%	Pass	3.38
22	Existing	6.49%	1.09%	0.14%	Pass	4.81
	Base Case	5.00%	0.73%	0.09%	Pass	4.46
	Proposed	4.68%	0.72%	0.09%	Pass	4.33
23	Existing	0.22%	0.00%	0.00%	Pass	2.44
	Base Case	0.49%	0.01%	0.00%	Pass	2.61
	Proposed	0.20%	0.00%	0.00%	Pass	2.74
24	Existing	2.00%	0.08%	0.00%	Pass	3.91
	Base Case	3.61%	0.23%	0.01%	Pass	4.30
	Proposed	2.91%	0.15%	0.01%	Pass	4.05
26	Existing	1.61%	0.08%	0.00%	Pass	3.53
	Base Case	1.81%	0.09%	0.00%	Pass	3.77
	Proposed	1.91%	0.10%	0.00%	Pass	3.70
all Hunter St	Existing	2.91%	0.59%	0.14%	average	3.70
	Base Case	2.98%	0.48%	0.09%		3.80
	Proposed	2.98%	0.46%	0.09%		3.82

4.4 George Street

The wind conditions along George Street for the Proposed Configuration have been shown to satisfy the standing comfort standard at all presented Test Locations, with conditions at Test Location 32 satisfying the sitting comfort standard.

The wind conditions for the Existing Configuration and Base Case Envelope, have been presented for all Test Locations for comparison. The standards satisfied have been presented in Table 3.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 3: Pedestrian Wind Comfort and Safety – George Street

Test Location	Configuration	Wind Comfort Standard			Safety	wind speed (m/s)
		Sitting	Standing	Walking		
31	Existing	3.47%	0.51%	0.04%	Pass	3.92
	Base Case	11.86%	3.45%	0.77%	Pass	6.05
	Proposed	8.83%	2.10%	0.42%	Pass	5.45
32	Existing	4.78%	0.98%	0.15%	Pass	4.20
	Base Case	4.30%	0.82%	0.12%	Pass	4.02
	Proposed	3.75%	0.71%	0.10%	Pass	4.03
all George St	Existing	4.13%	0.74%	0.10%	average	4.06
	Base Case	8.08%	2.13%	0.45%		5.04
	Proposed	6.29%	1.41%	0.26%		4.74

4.5 Laneway

The Proposed Configuration includes a Laneway through the ground level which connects Pitt and Hunter Streets. Additional measurements were made along this Laneway and the wind conditions have been shown to satisfy the sitting comfort standard at all Test Locations.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 4: Pedestrian Wind Comfort and Safety – Laneway

Test Location	Configuration	Wind Comfort Standard				Safety	wind speed (m/s)
		Sitting	Standing	Walking			
37	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.79%	0.04%	0.00%	Pass	2.76	
38	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.22%	0.01%	0.00%	Pass	2.30	
39	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.57%	0.02%	0.00%	Pass	2.55	
40	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.00%	0.00%	0.00%	Pass	1.68	
41	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.01%	0.00%	0.00%	Pass	1.74	
42	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.01%	0.00%	0.00%	Pass	1.95	
43	Existing	N/A	N/A	N/A	N/A	N/A	
	Base Case	N/A	N/A	N/A	N/A	N/A	
	Proposed	0.16%	0.00%	0.00%	Pass	2.44	
all Laneway	Existing	N/A	N/A	N/A	average	N/A	
	Base Case	N/A	N/A	N/A		N/A	
	Proposed	0.25%	0.01%	0.00%		2.20	

4.6 Average Pedestrian Level Wind Speeds

The average wind conditions along Pitt, Hunter and George Streets for the Existing Configuration, Base Case Configuration and Proposed Configuration have been summarised in Table 5, below, along with global averages of the wind comfort levels and speeds across these measured areas.

Table 5: Pedestrian Wind Comfort and Safety – all pedestrian level locations

Test Location	Configuration	Wind Comfort Standard			Safety	wind speed (m/s)
		Sitting	Standing	Walking		
Pitt St	Existing	1.60%	0.21%	0.03%	Pass	3.14
	Base Case	1.93%	0.20%	0.02%	Pass	3.30
	Proposed	2.74%	0.37%	0.03%	Pass	3.58
Hunter St	Existing	3.55%	0.66%	0.13%	Pass	3.70
	Base Case	3.14%	0.50%	0.09%	Pass	3.80
	Proposed	3.23%	0.50%	0.08%	Pass	3.82
George St	Existing	4.77%	1.10%	0.22%	Pass	4.06
	Base Case	6.04%	1.57%	0.34%	Pass	5.04
	Proposed	5.41%	1.27%	0.25%	Pass	4.74
Laneway	Existing	N/A	N/A	N/A	N/A	N/A
	Base Case	N/A	N/A	N/A	N/A	N/A
	Proposed	0.25%	0.01%	0.00%	Pass	2.20
all pedestrian level locations	Existing	3.30%	0.66%	0.13%	average	3.63
	Base Case	3.70%	0.76%	0.15%		4.05
	Proposed	3.79%	0.71%	0.12%		4.04

4.7 Podium Terrace

The wind conditions for the Proposed Configuration (including a 1.2m high balustrade) on the podium level terrace have been shown to satisfy the sitting comfort standard at Test Locations T1 to T5. The wind conditions at these Test Locations were shown to pass the Safety criterion for all wind directions. The standards satisfied have been presented in Table 6.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 6: Wind Comfort and Safety – Podium Terrace

Test Location	Configuration	Wind Comfort Standard				Safety	wind speed (m/s)
		Sitting	Standing	Walking			
T1	Proposed	3.96%	0.59%	0.04%	Pass	4.09	
T2	Proposed	4.23%	1.27%	0.27%	Pass	3.20	
T3	Proposed	2.76%	0.25%	0.01%	Pass	3.71	
T4	Proposed	0.54%	0.00%	0.00%	Pass	2.57	
T5	Proposed	0.93%	0.02%	0.00%	Pass	2.72	
all Podium Terrace	Proposed				average	3.26	

4.8 Rooftop Terrace

The wind conditions for the Proposed Configuration (including a 1.2m high balustrade) at the Rooftop Terrace have been shown to satisfy the walking criterion at all Test Locations but fail the safety standard at Test Locations R1 and R3.

Two mitigation strategies have been explored, with the primary goal of improving the wind conditions to satisfy the safety standard. The first mitigation strategy involved increasing the height of the balustrade to 1.8m shown in Figure 13. While this was shown to improve the wind conditions at Test Locations R1 and R3, the conditions were still shown to fail the safety standard at these locations.

The wind conditions at Test Locations R1 and R3 were shown to improve to meet the safety standard with the inclusion of solid, 1.8m high screens at the northeast and northwest corners. The placement of these wind mitigation features are shown schematically in Figure 13. This mitigation strategy was also shown to improve the wind conditions to meet the sitting and standing criteria at certain Test Locations.

The standards satisfied have been presented in Table 7.

The wind conditions are a function of wind direction based on the gust criteria for Sydney as presented in Appendix A. It is noted that at each Test Location the directional specific wind conditions may be higher than those of the tabulated results for all wind directions.

Table 7: Wind Comfort and Safety – Rooftop Terrace

Test Location	Configuration	Wind Comfort Standard			Safety	wind speed (m/s)
		Sitting	Standing	Walking		
R1	Proposed	25.98%	14.44%	7.61%	FAIL	9.67
	Proposed + 1.8m balustrade	16.18%	6.16%	2.17%	FAIL	6.84
	Proposed + Screens + 1.8m balustrade	4.28%	0.52%	0.06%	Pass	4.13
R2	Proposed	18.09%	5.84%	1.46%	Pass	7.09
	Proposed + 1.8m balustrade	19.50%	6.24%	1.86%	Pass	7.29
	Proposed + Screens + 1.8m balustrade	7.84%	1.52%	0.21%	Pass	5.03
R3	Proposed	23.61%	9.99%	3.78%	FAIL	8.21
	Proposed + 1.8m balustrade	21.07%	9.21%	3.65%	FAIL	7.70
	Proposed + Screens + 1.8m balustrade	6.65%	1.33%	0.22%	Pass	4.51
R4	Proposed	18.05%	6.36%	2.00%	Pass	6.81
	Proposed + 1.8m balustrade	14.33%	4.79%	1.63%	Pass	6.37
	Proposed + Screens + 1.8m balustrade	6.05%	1.63%	0.51%	Pass	4.30
R5	Proposed	14.15%	5.13%	1.56%	Pass	6.54
	Proposed + 1.8m balustrade	11.19%	3.31%	0.91%	Pass	5.84
	Proposed + Screens + 1.8m balustrade	2.75%	0.26%	0.02%	Pass	4.04
all Roof Top Terraces	Proposed				average	7.67
	Proposed + 1.8m balustrade					6.81
	Proposed + Screens + 1.8m balustrade					4.40

5. CONCLUSIONS

Wind tunnel tests have been conducted on a 1/400 scale model of the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney. The model of the Development within surrounding buildings was tested in a simulated upstream boundary layer of the natural wind to determine likely environmental wind conditions. These wind conditions have been related to the Sydney Design Control Plan 2012 and assessed with respect to the Safety standard as well as the Walking, Standing and Sitting comfort standards.

The ground level wind conditions in the surrounding streetscapes and within the development for the Proposed Configuration have been shown to satisfy the standing comfort standard for all Test Locations, with many locations satisfy the sitting comfort standard. The wind comfort standard achieved has been shown to be generally similar for all configurations.

The ground level wind conditions for the Existing Configuration have been presented at all Test Locations for comparison.

For the Proposed Configuration, the wind conditions on the Podium Terrace of the development have been shown to be within the sitting comfort standards. However the wind conditions on the Rooftop Terrace have been shown to fail the safety standard at Test Locations R1 and R3.

Wind mitigation strategies have been developed for the Rooftop Terrace and have been shown to improve the wind conditions to meet the safety criterion at all Test Locations on the roof top terraces as well as meeting the standing and/or sitting comfort standards at these Test Locations.

The wind conditions at all Test Locations on the ground, podium, and rooftop levels (with mitigation strategies) have been shown to satisfy the safety standard.



J. Kostas

REFERENCES

1. W. H. Melbourne, Criteria for environmental wind conditions, Journal of Industrial Aerodynamics, Volume 3, 1978, pp. 241-249
2. W. H. Melbourne, Wind environment studies in Australia, Journal of Industrial Aerodynamics, Volume 3, 1978, pp. 201-214

FIGURES

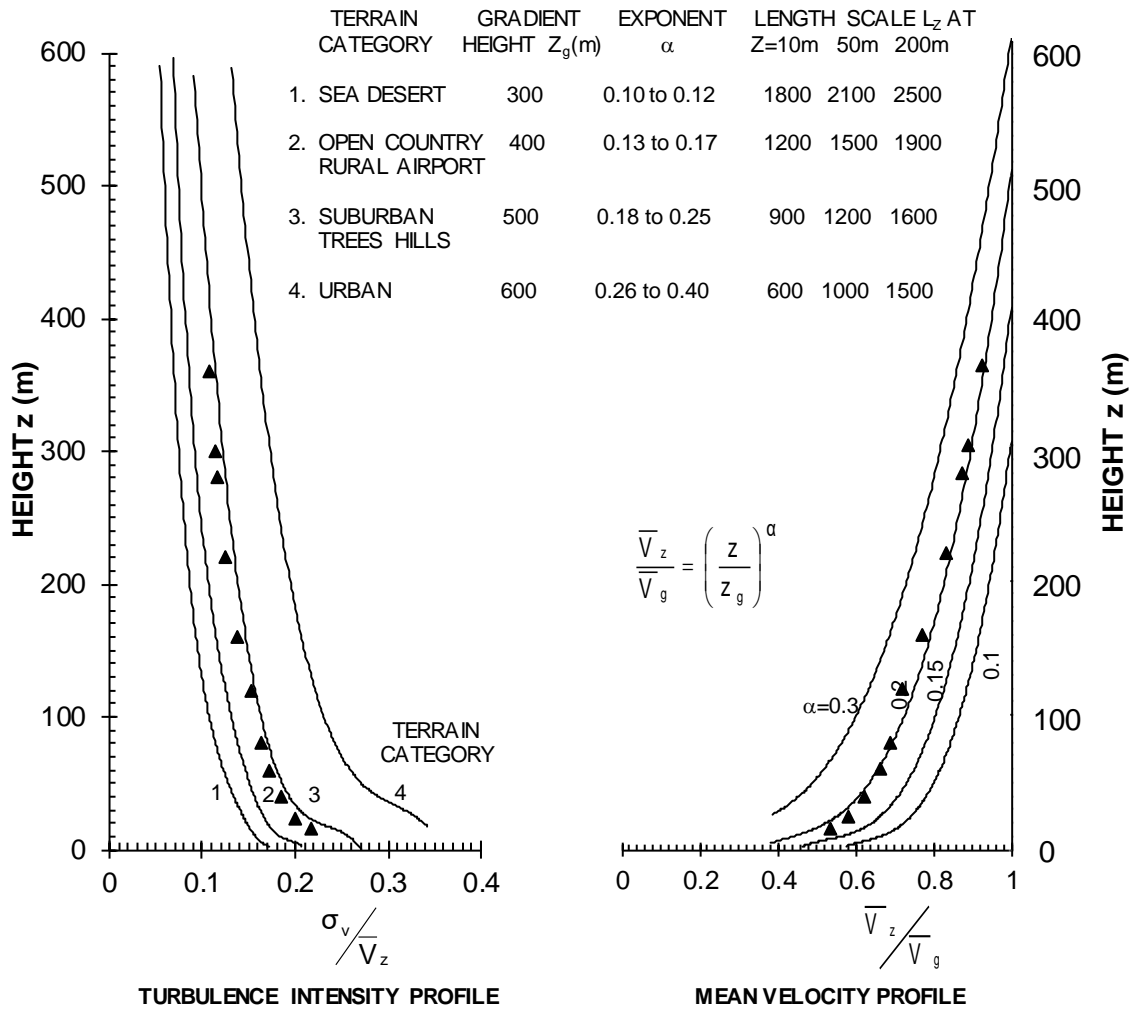


Figure 2 – 1/400 scale TC3 boundary layer turbulence intensity and mean velocity profiles in the MEL Consultants Boundary Layer Wind Tunnel 4.8m x 2.2m working section, scaled to full scale dimensions.



Figure 3 – View from the north of the 1/400 scale Proposed Configuration model of the 15-23 Hunter Street and 105-107 Pitt Street, Sydney in the wind tunnel.

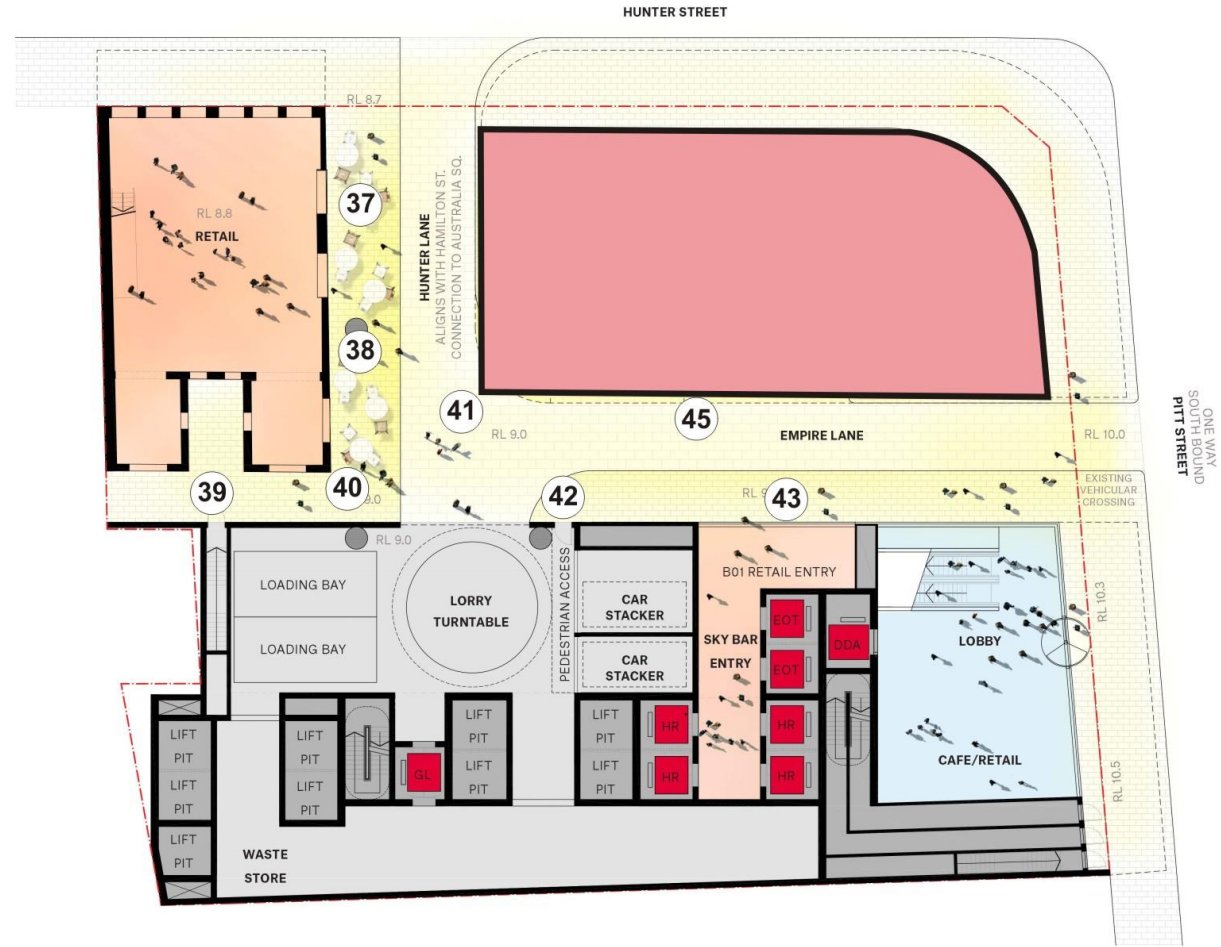


Figure 4 – View from the southwest of the 1/400 scale Proposed Configuration model of the 15-23 Hunter Street and 105-107 Pitt Street, Sydney in the wind tunnel.

591



Figure 5a - Ground level Test Locations on the streetscapes around the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney.



592

Legend

Test Location

NORTH

Figure 5b - Ground level Test Locations around the internal Laneway of 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney.




15-23 HUNTER STREET AND 105-107 PITT STREET | OCTOBER 2021 PLANNING PROPOSAL URBAN DESIGN REPORT

111

<p>Legend</p> <p>Ⓝ Test Location</p>	<p>NORTH</p>
--------------------------------------	--------------

Figure 5c - Podium Terrace Test Locations of the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney.

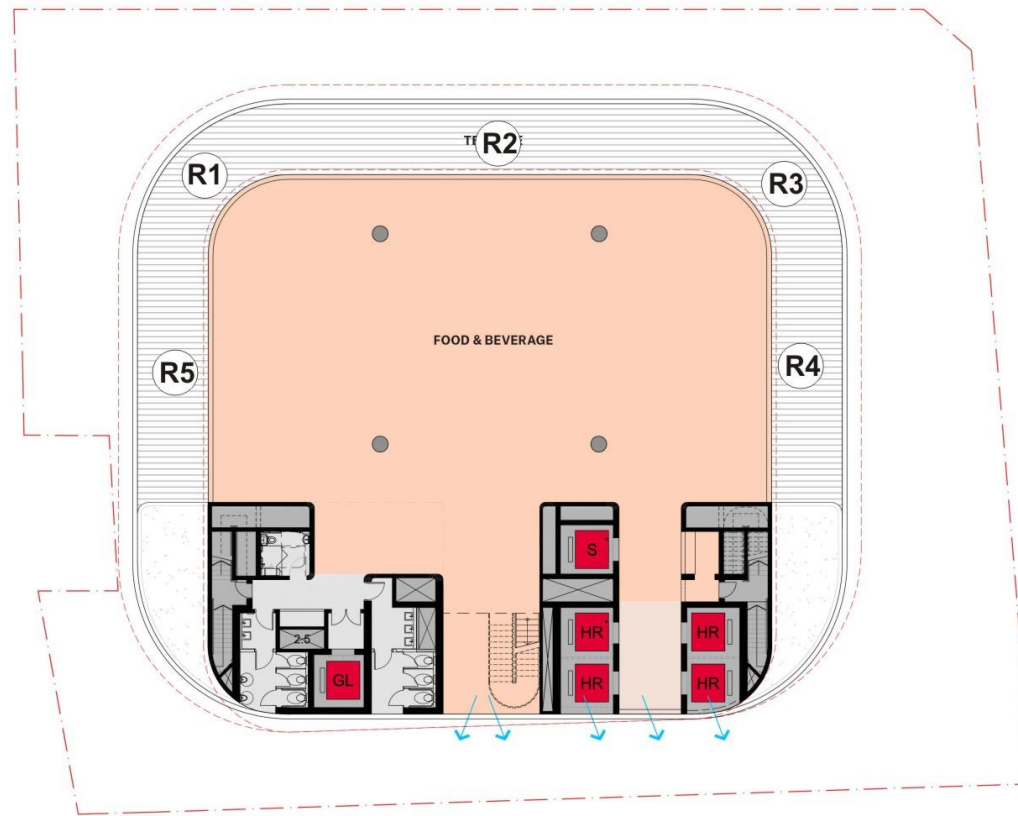

594

Legend

Ⓝ Test Location

NORTH

Figure 5d - Rooftop Terrace Test Locations of the 15-23 Hunter Street and 105-107 Pitt Street Development, Sydney.

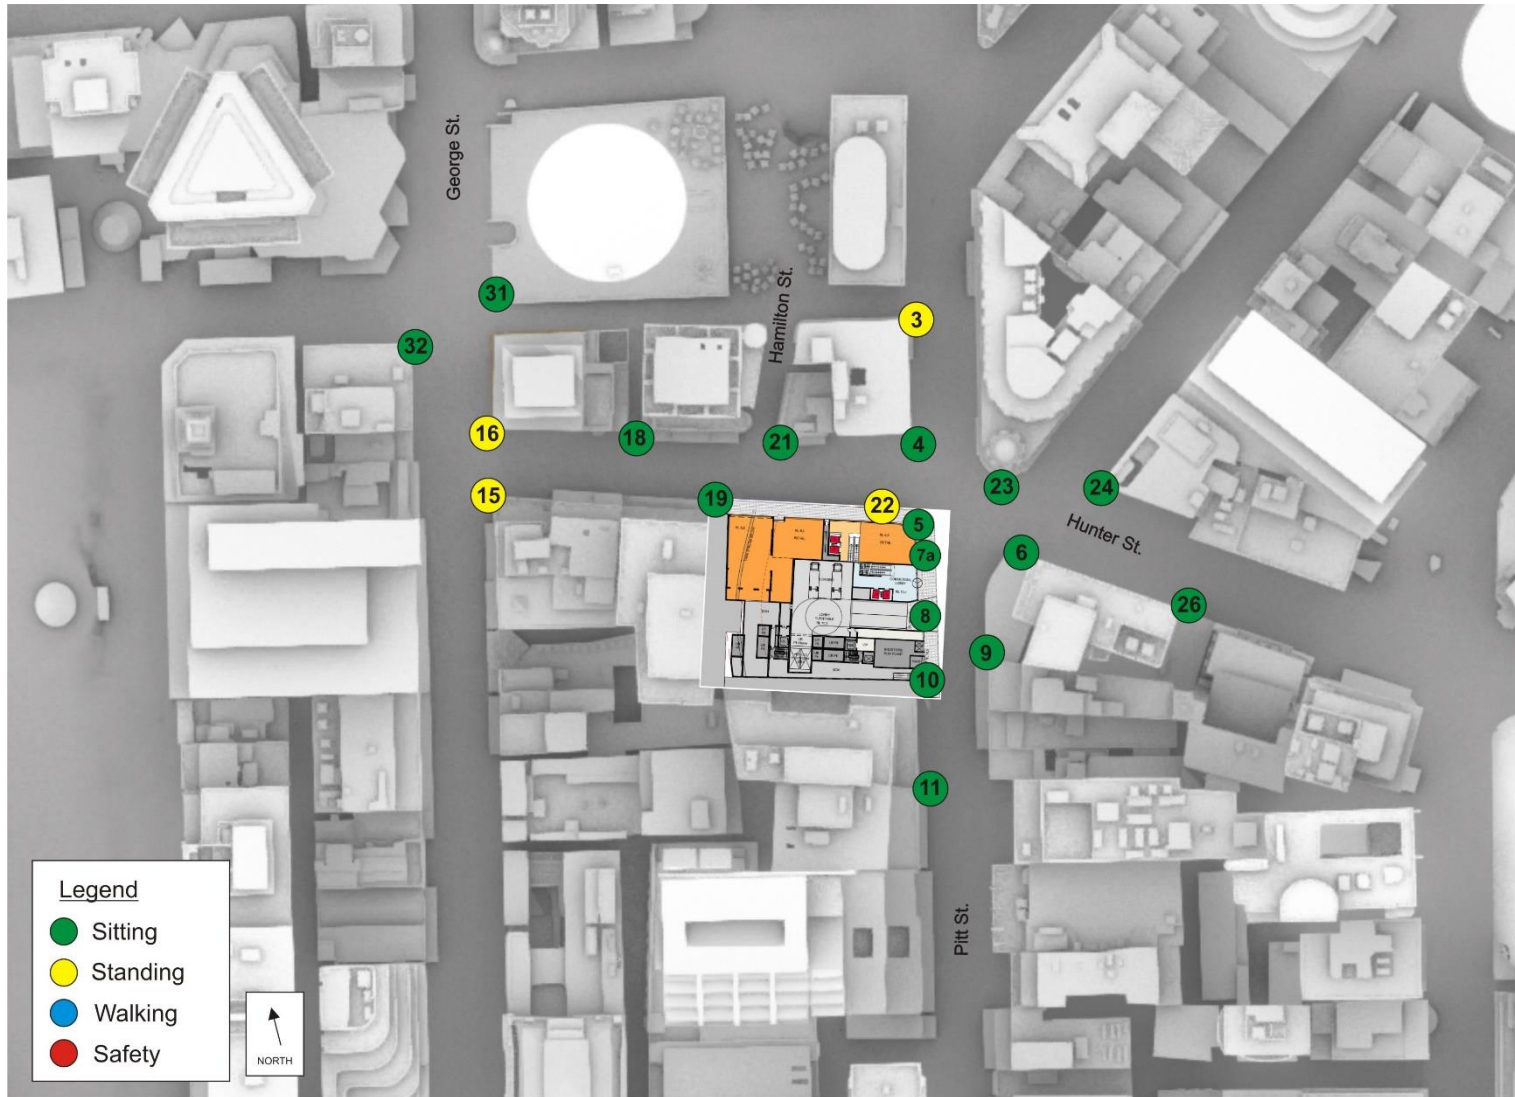


Figure 6 – Summary of ground level wind conditions for the Existing Configuration for 360° of wind direction.



Figure 7 – Summary of ground level wind conditions for the Base Case Configuration for 360° of wind direction.



Figure 8 – Summary of ground level wind conditions on the surrounding streetscapes for the Proposed Configuration for 360° of wind direction.

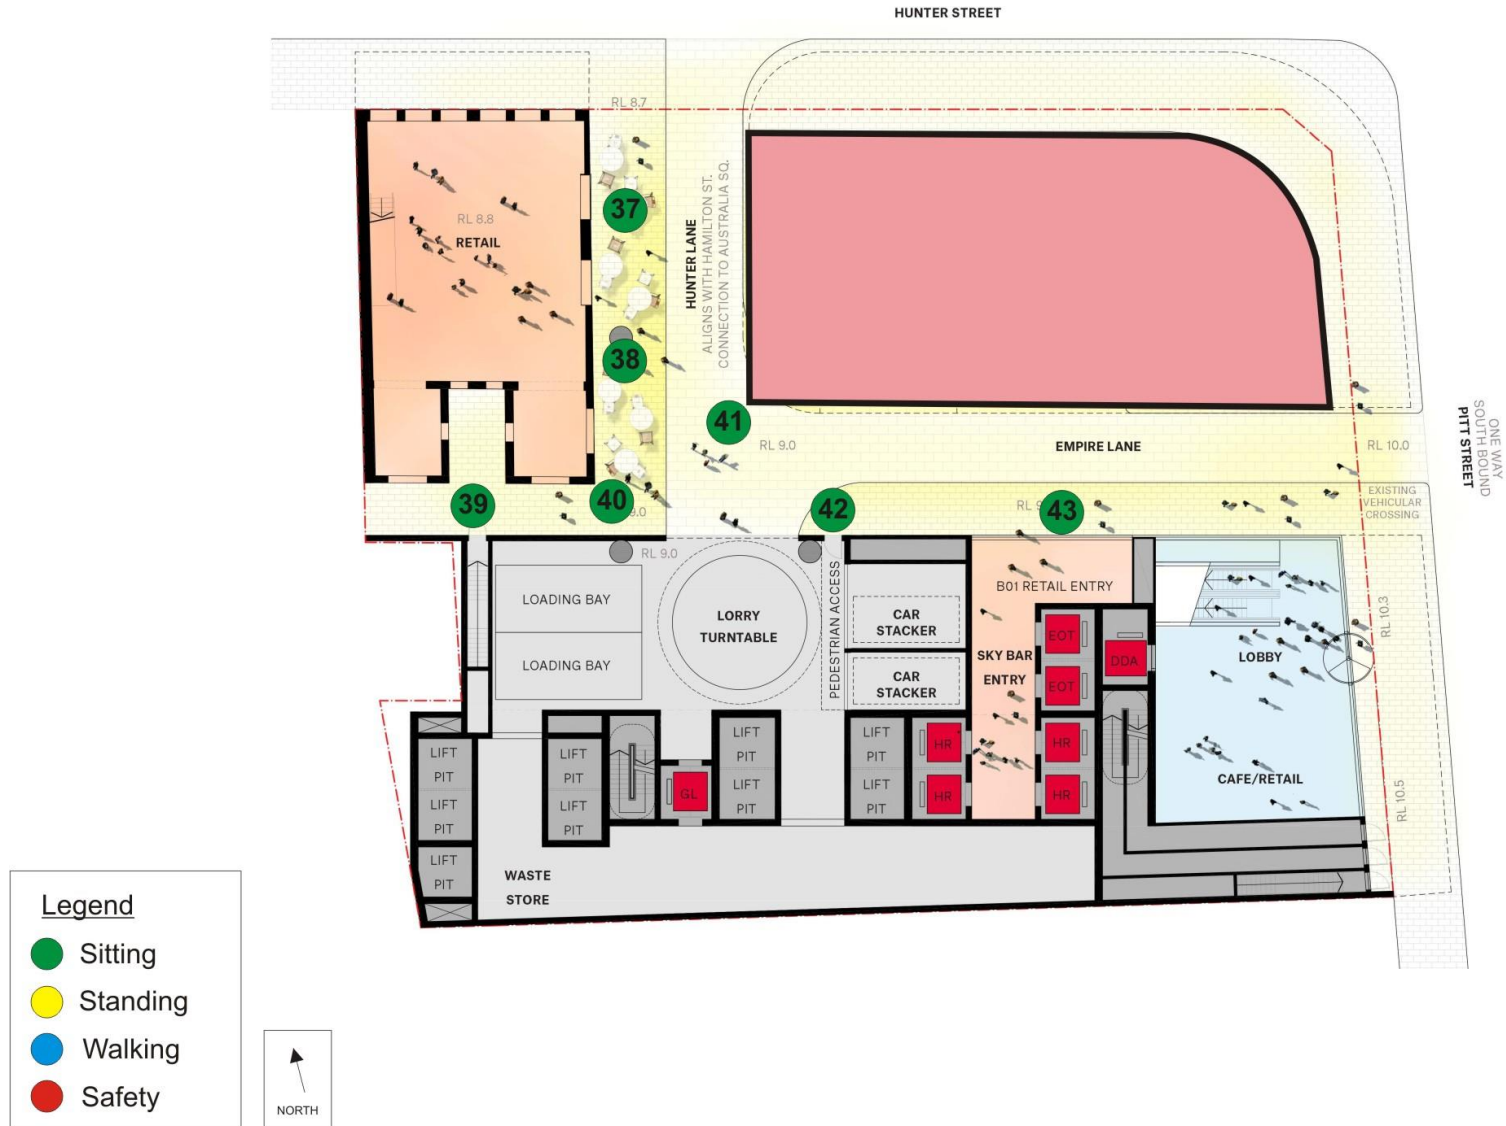


Figure 9 – Summary of ground level wind conditions on the internal Laneway for the Proposed Configuration for 360° of wind direction.



15-23 HUNTER STREET AND 105-107 PITT STREET | OCTOBER 2021 PLANNING PROPOSAL URBAN DESIGN REPORT

Legend

Test Location

NORTH

Legend

- Sitting
- Standing
- Walking
- Safety

Figure 10 – Summary of Podium Terrace wind conditions for the Proposed Configuration with 1.2m balustrade for 360° of wind direction.

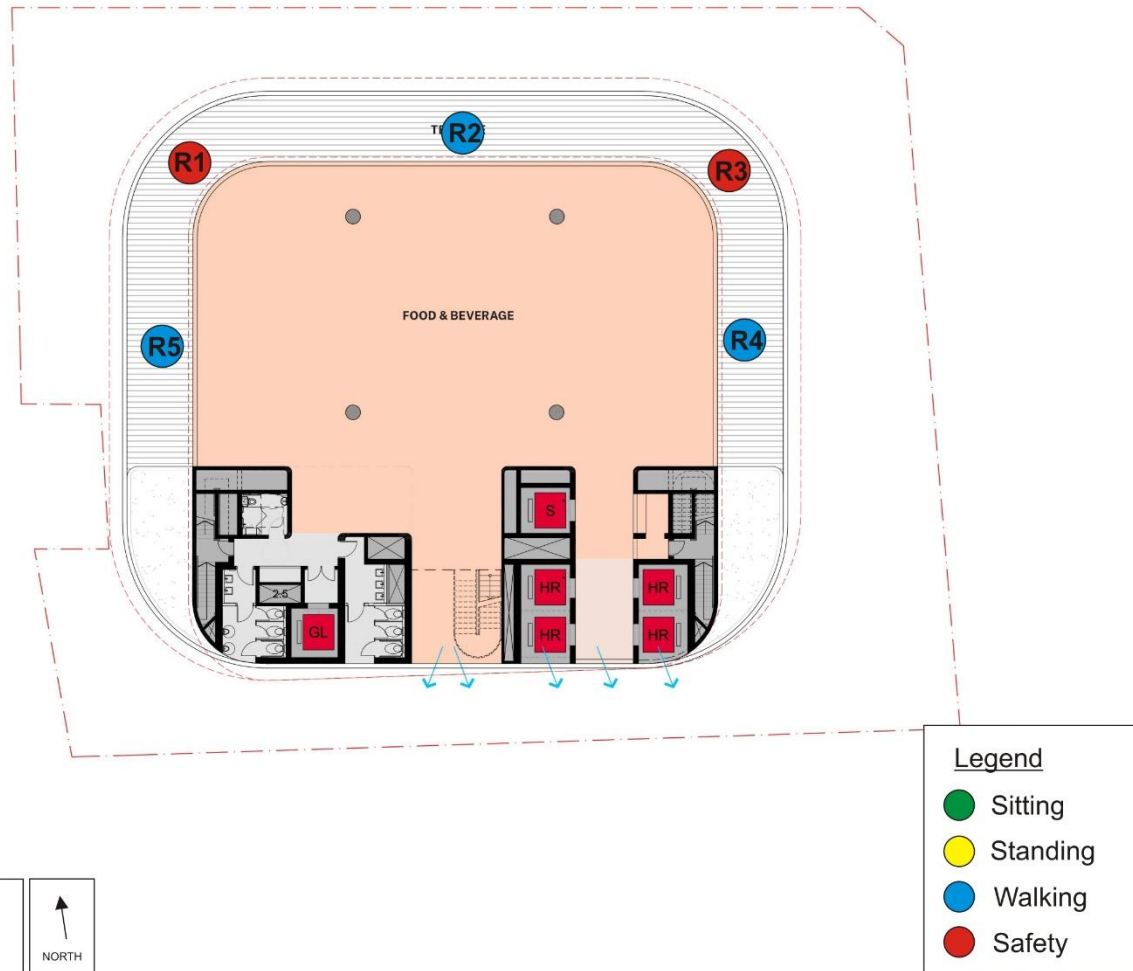


Figure 11 – Summary of Rooftop Terrace wind conditions for the Proposed Configuration with 1.2m balustrade for 360° of wind direction.

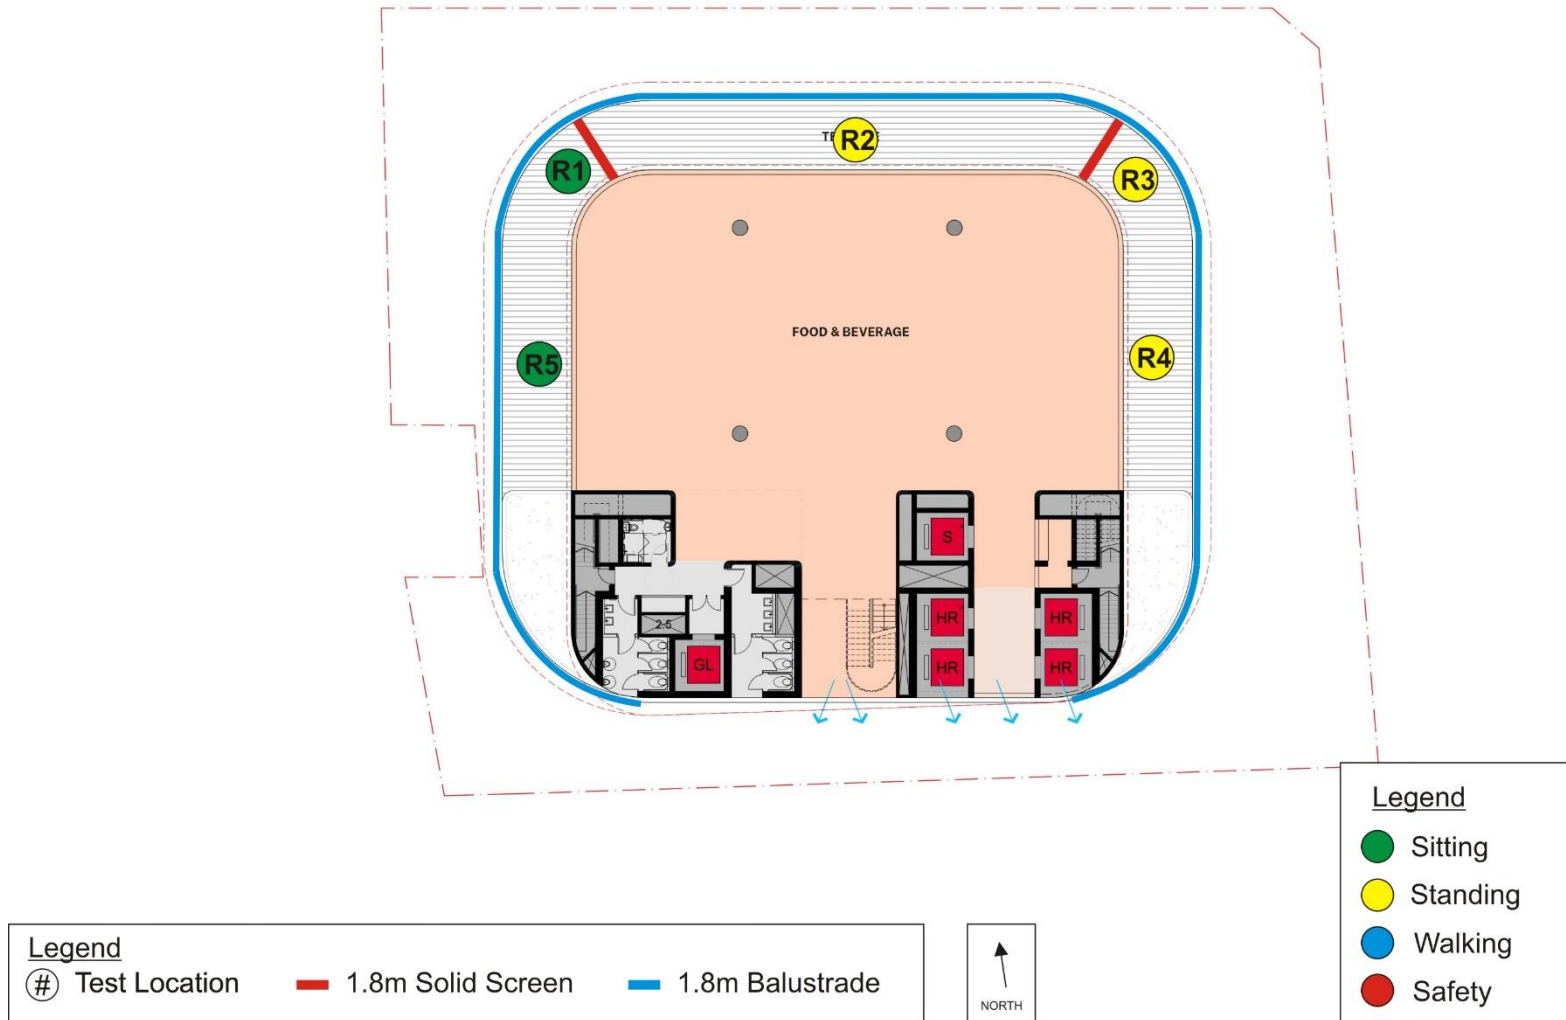


Figure 12 – Summary of Rooftop Terrace wind conditions for the Proposed Configuration with 1.8m balustrade and 1.8m solid screens for 360° of wind direction.

Appendix A



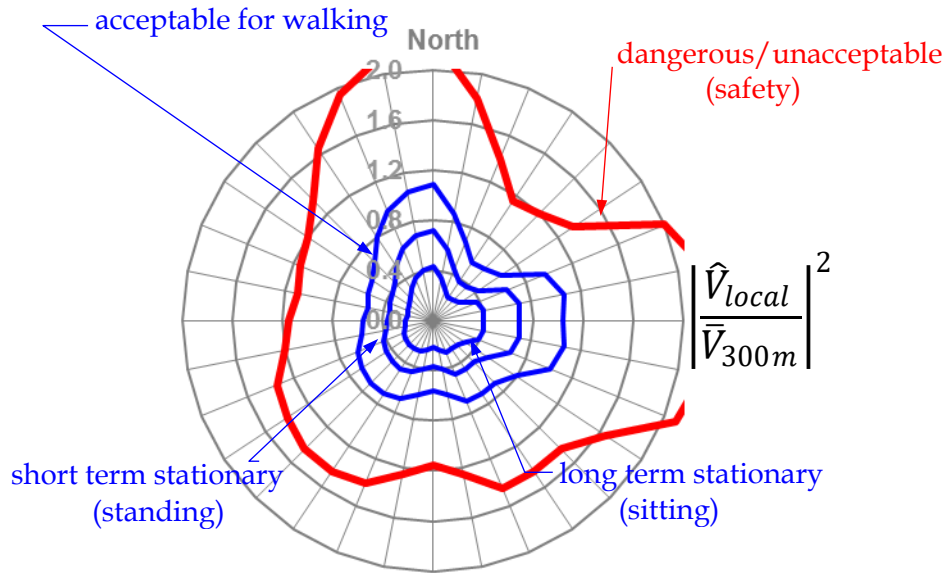


Figure A1 - Environmental wind criteria for Sydney as a function of wind direction expressed in terms of peak velocity pressure ratio.


Test Location

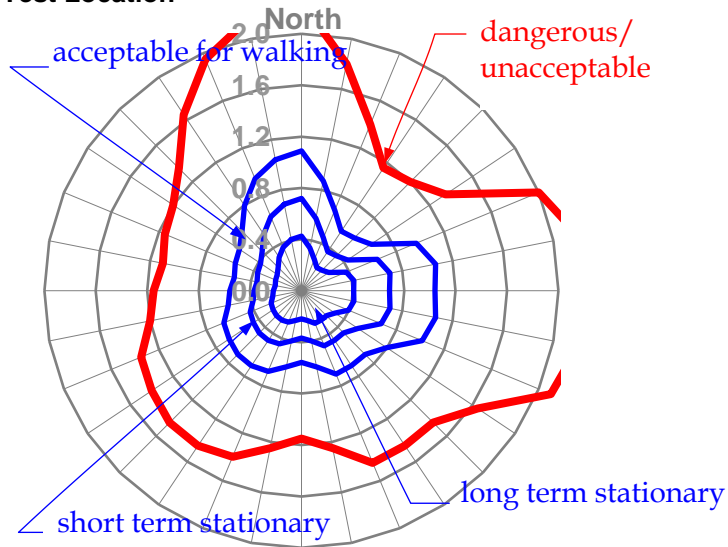


3

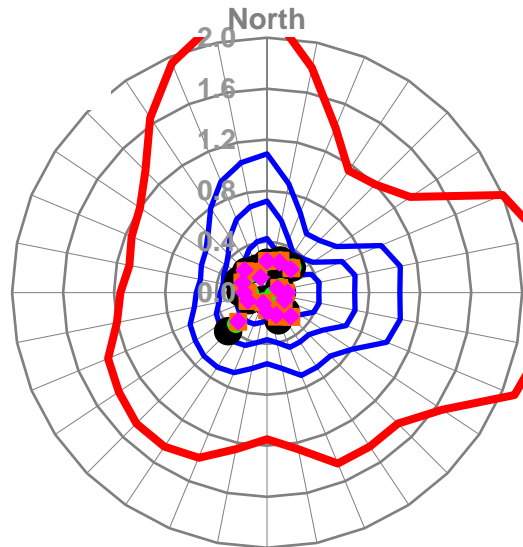

4

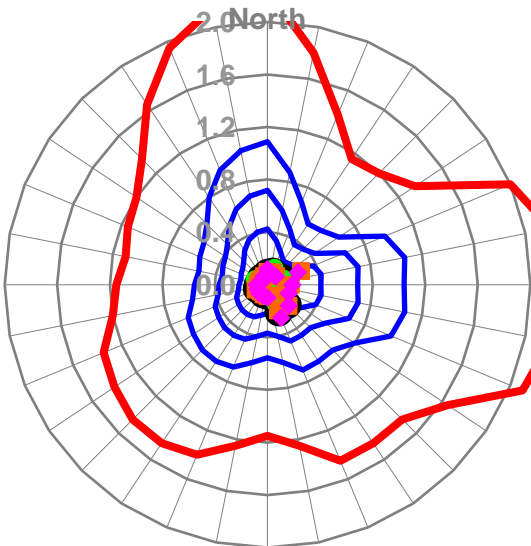



5

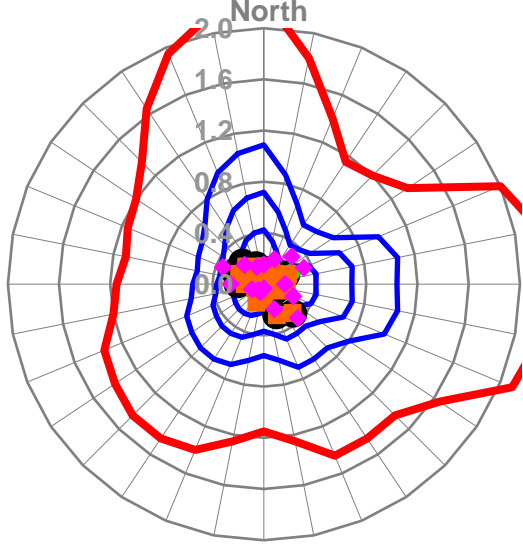

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A2 - Pitt Street

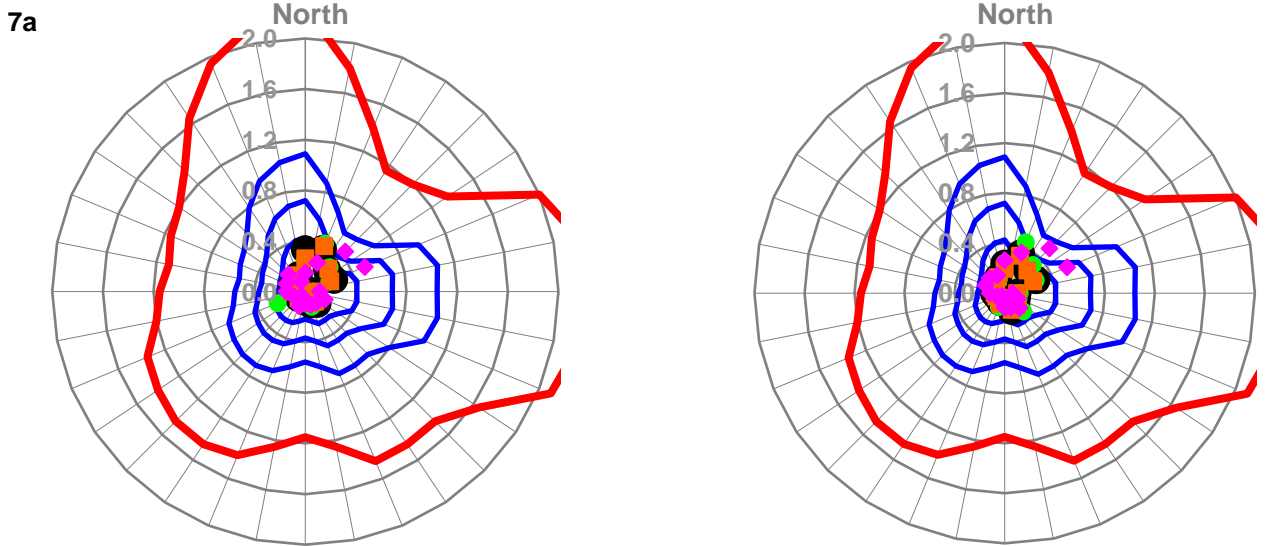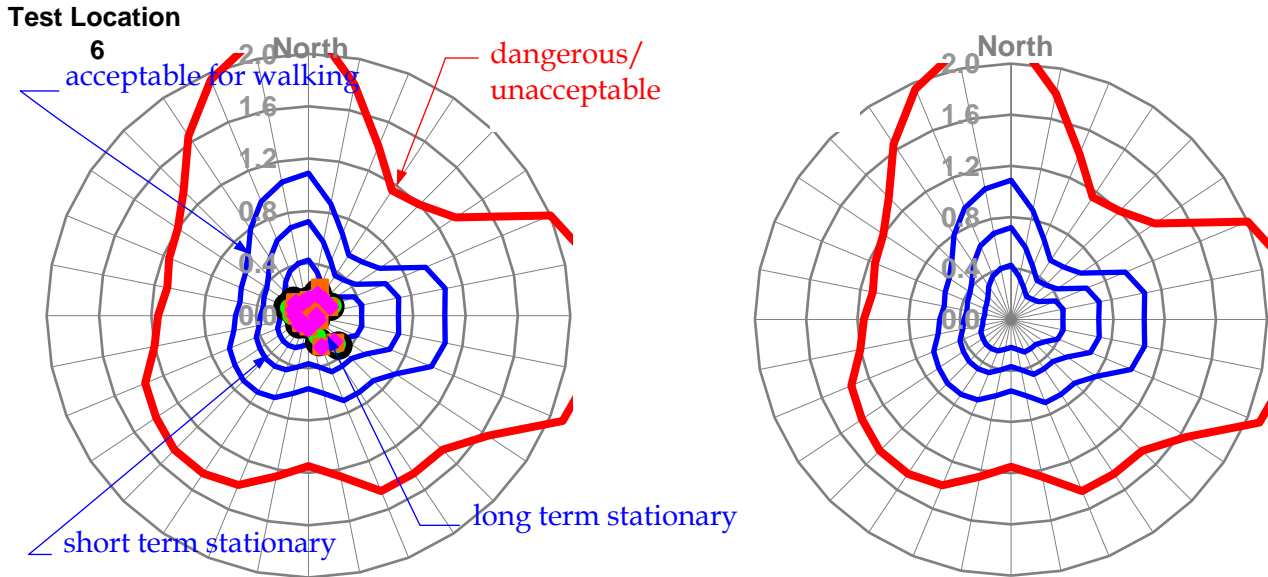


8

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction




Figure A3 - Pitt Street - continued

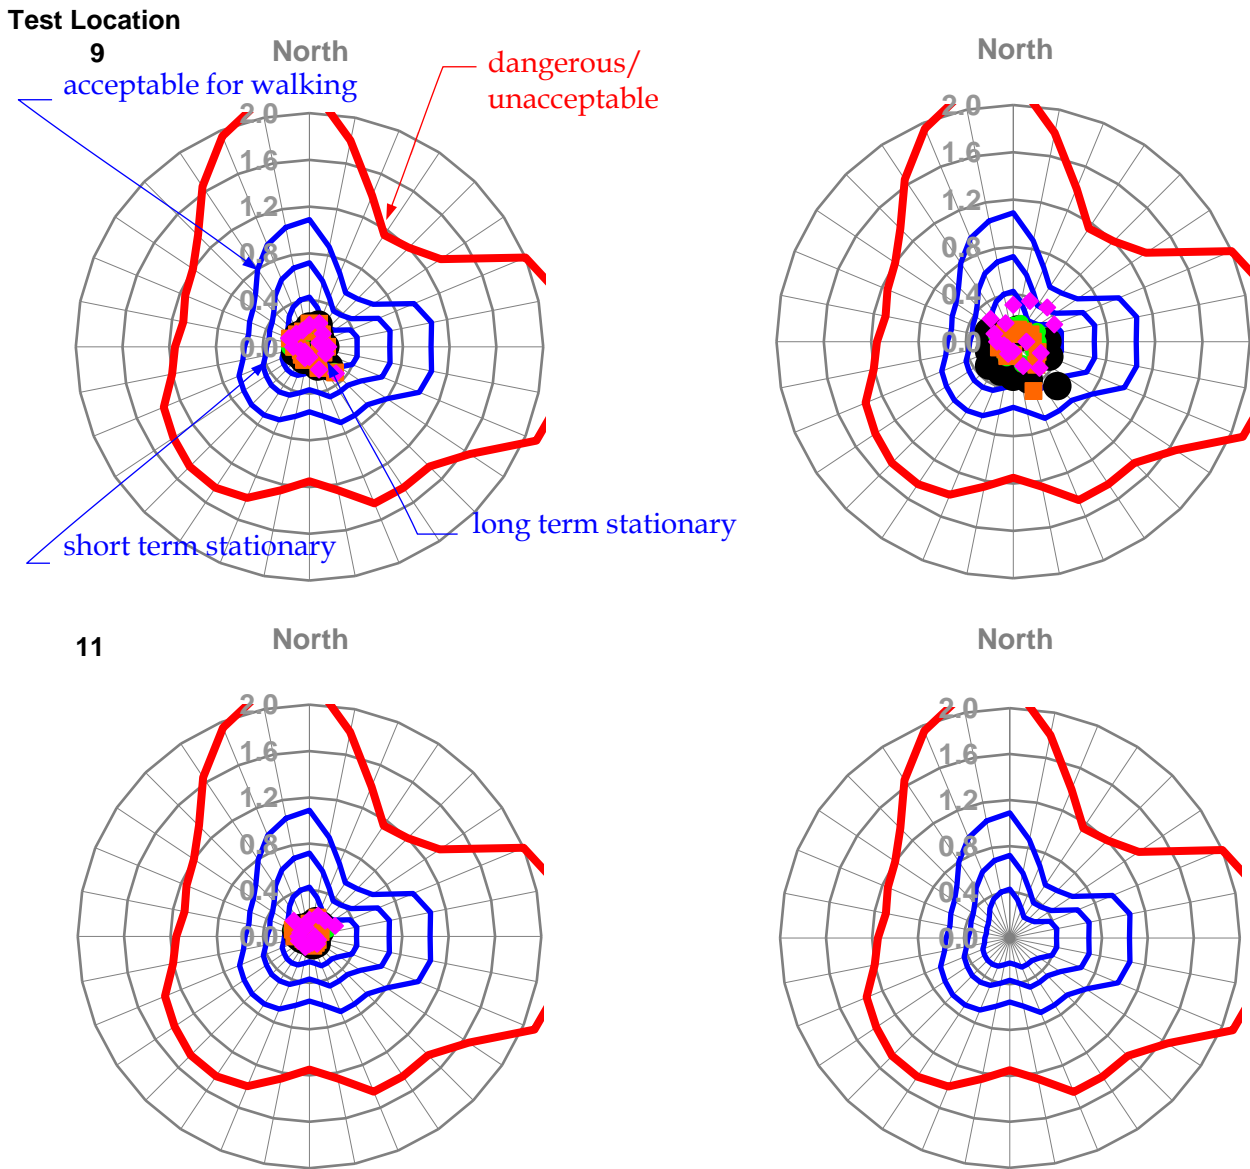


Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction

Base Configuration	●
Existing Configuration	●
Proposed Configuration	◆



Figure A4 - Pitt Street - continued

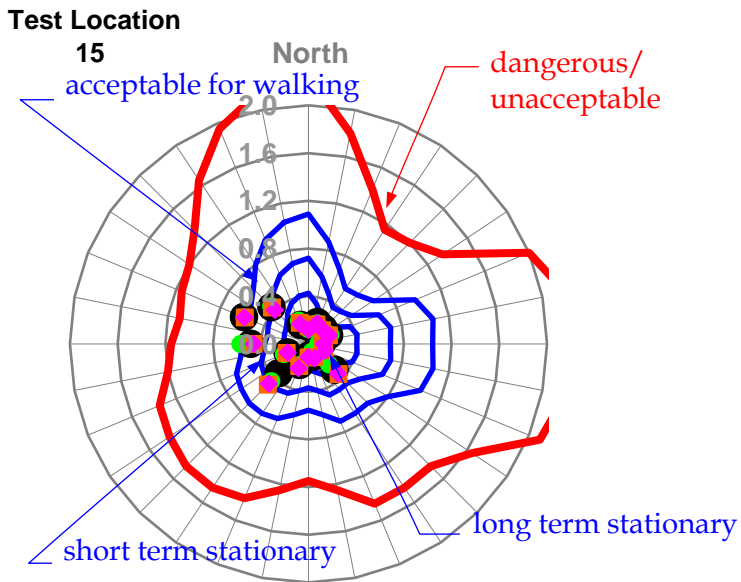

16

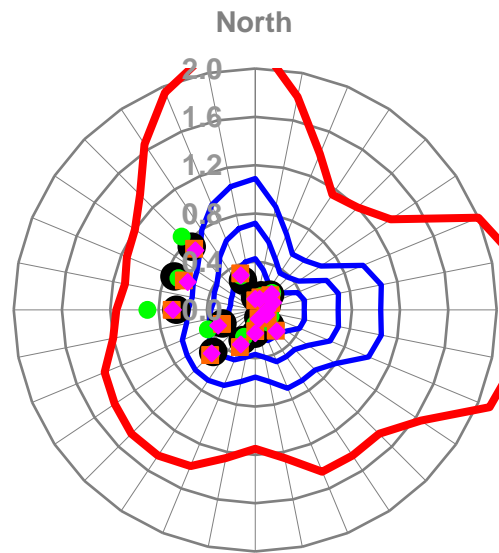

18

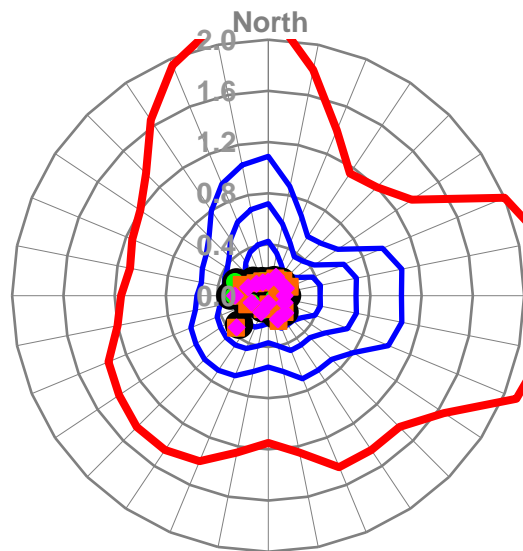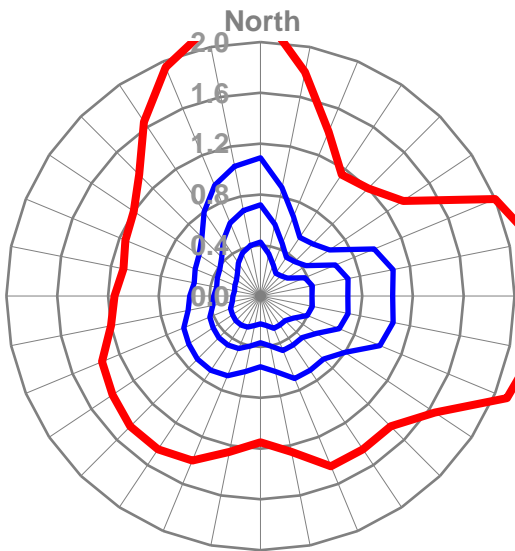

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction




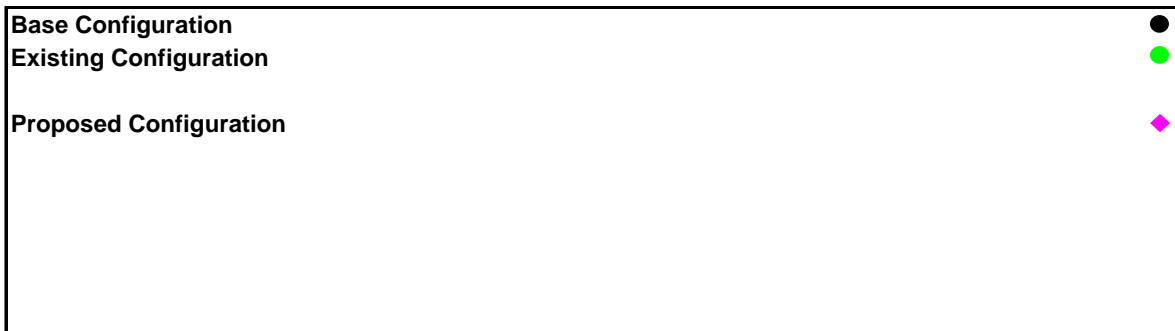



Figure A5 - Hunter Street

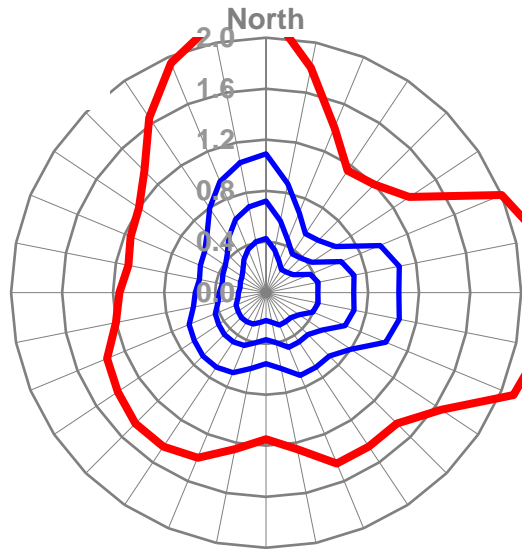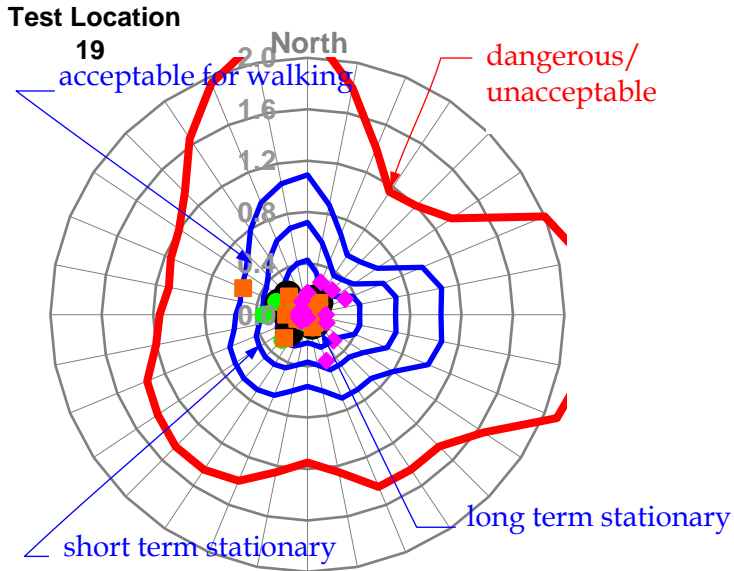

21

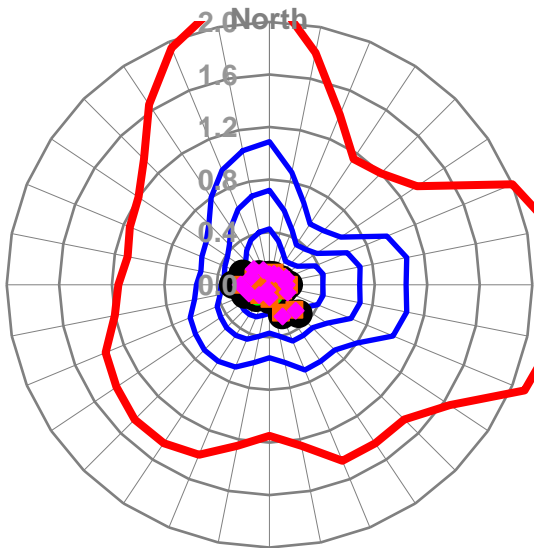

22


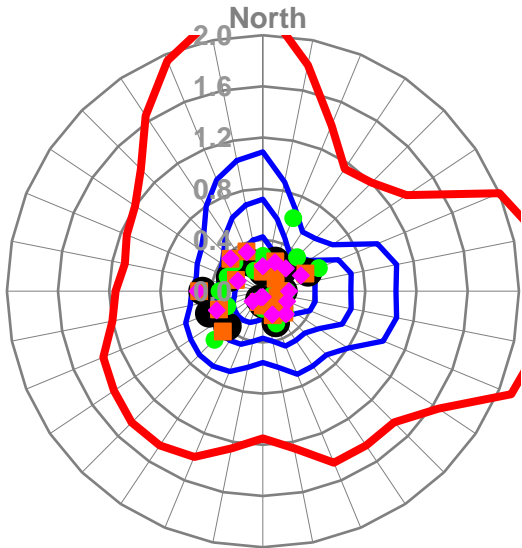


Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction




Figure A6 - Hunter Street - continued


Test Location

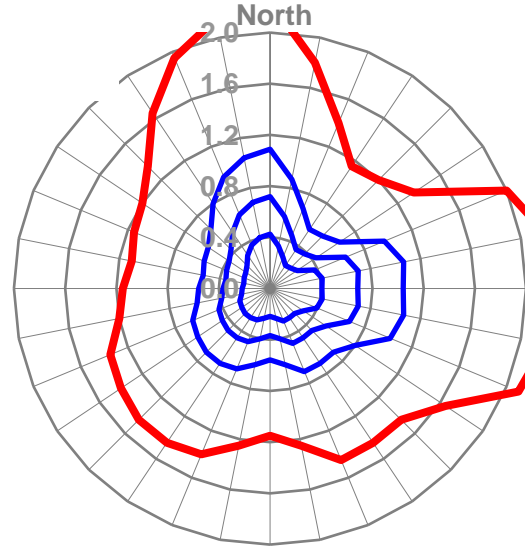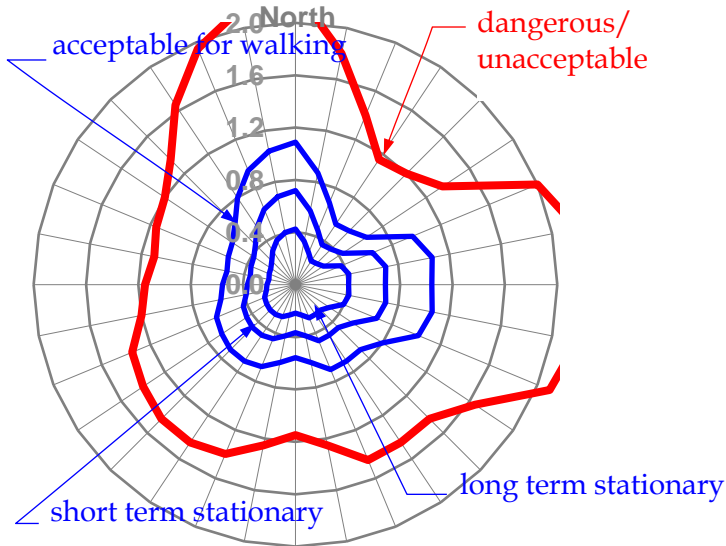

23

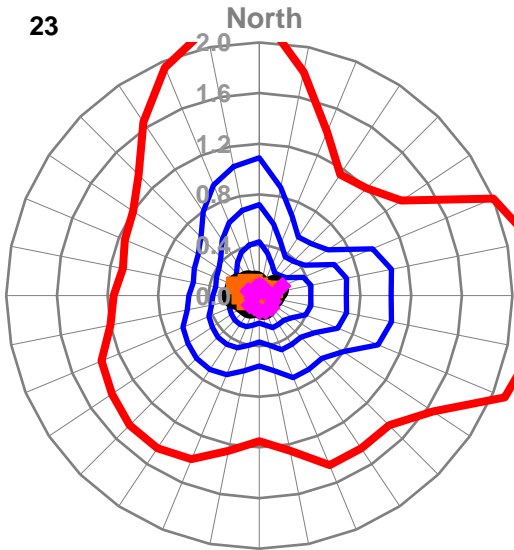


24

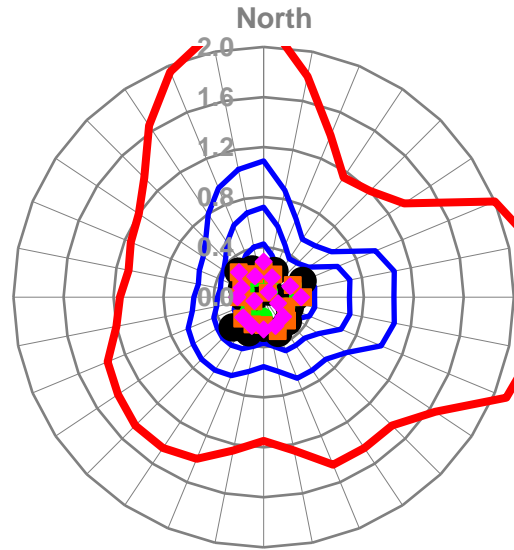

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A7 - Hunter Street - continued

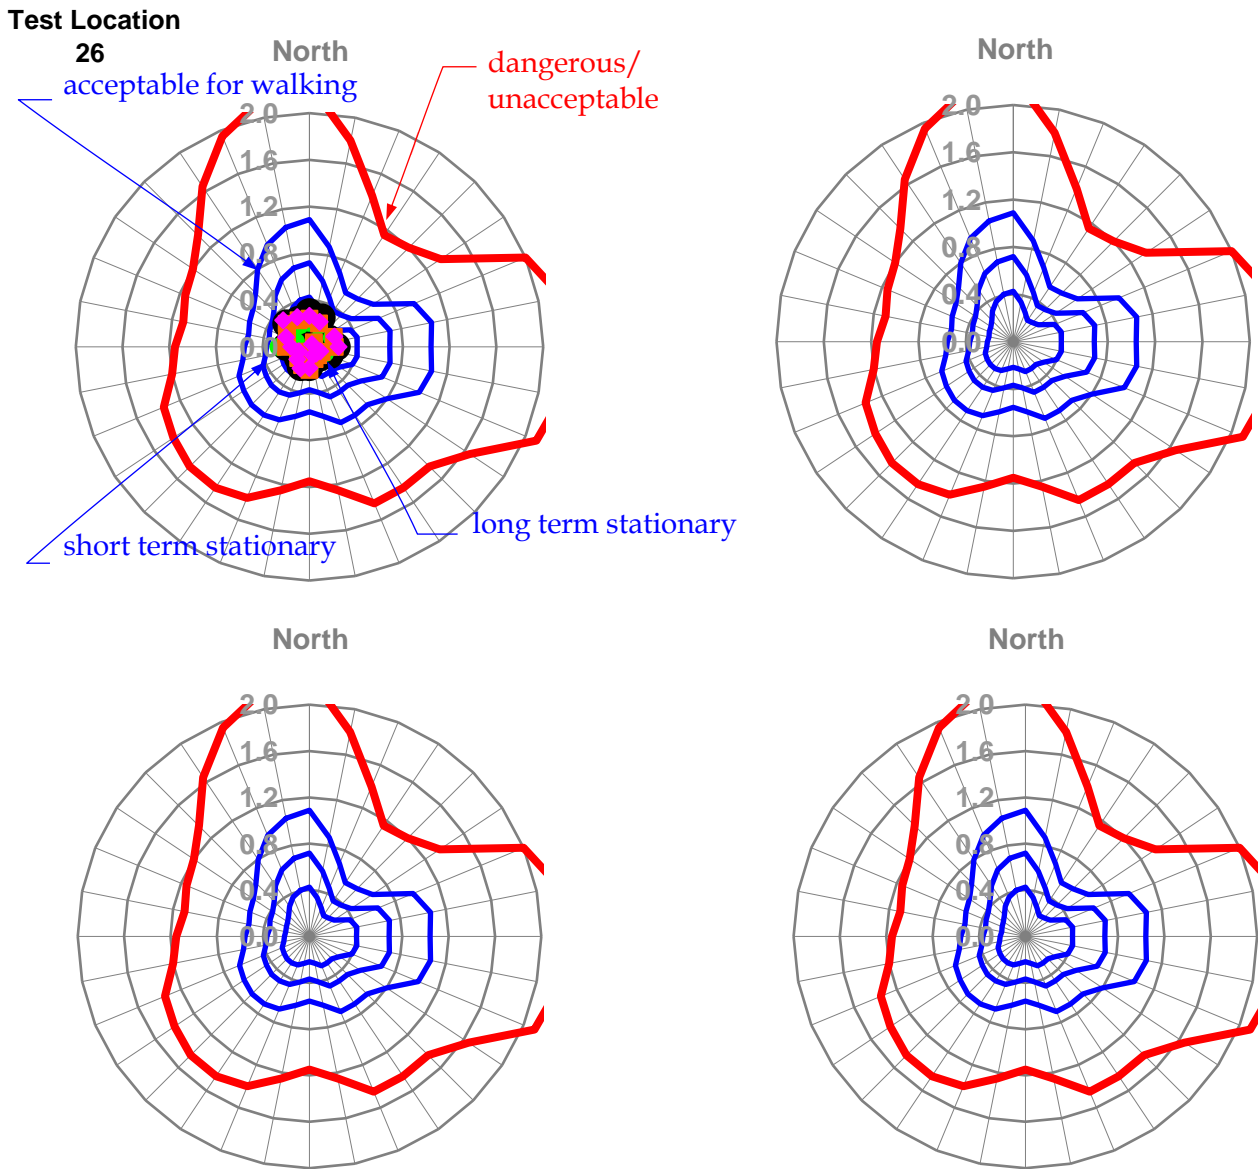


Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction

Base Configuration	●
Existing Configuration	●
Proposed Configuration	◆


Figure A8 - Hunter Street - continued

Test Location

31

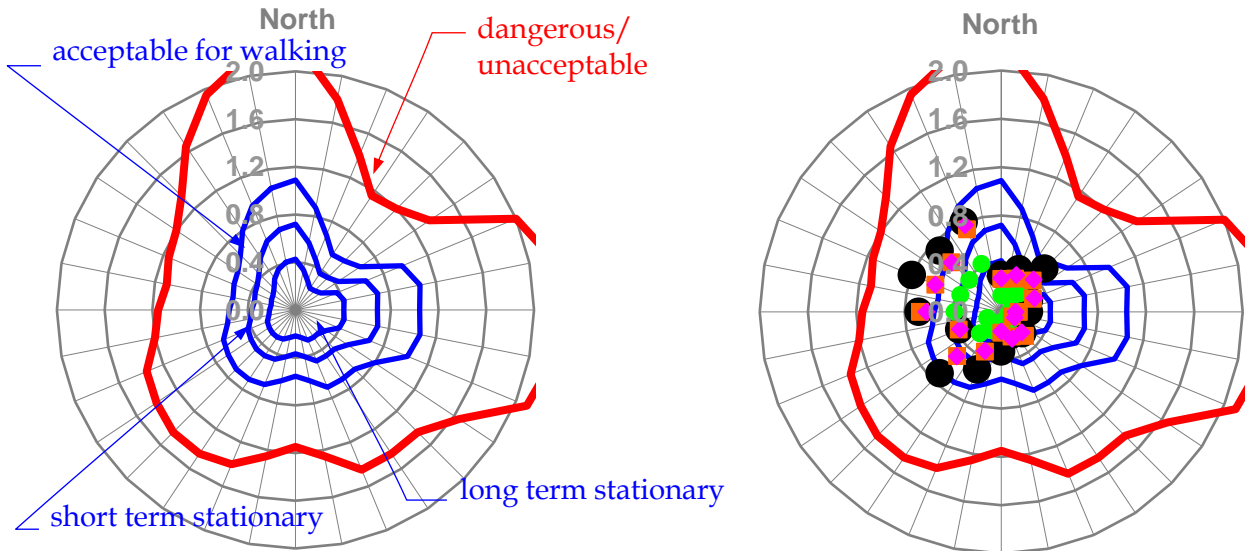


32

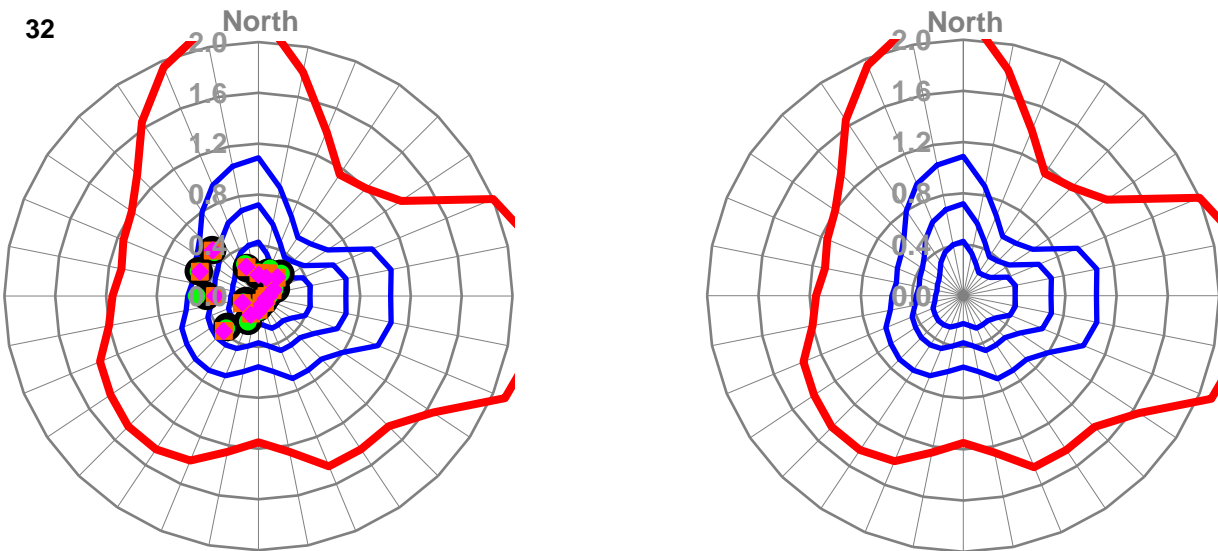

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A9 - George Street

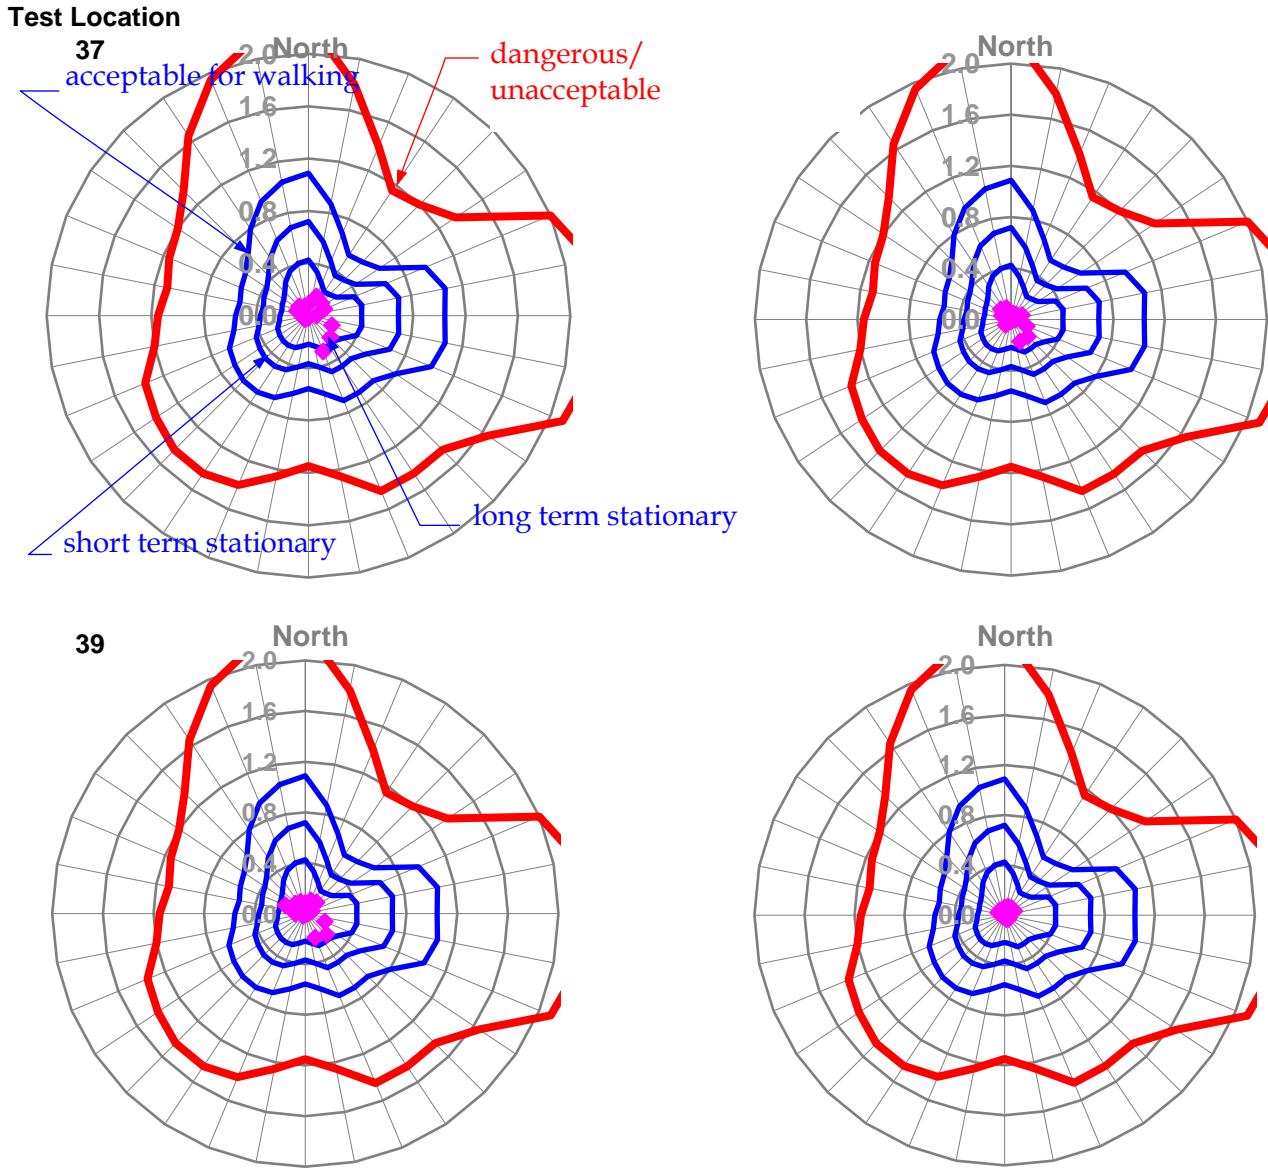

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A10 - Hunter and Empire Lanes

Test Location

41


North

acceptable for walking

dangerous/
unacceptable


short term stationary

long term stationary

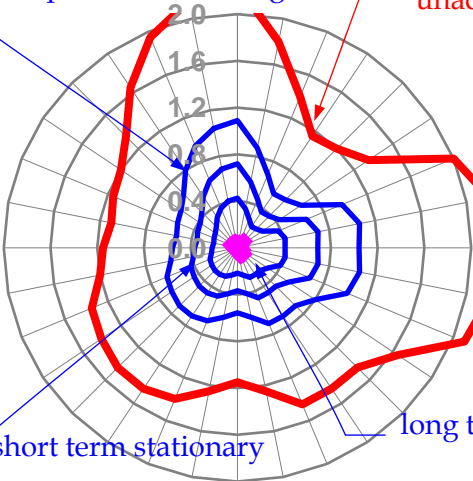


42

North

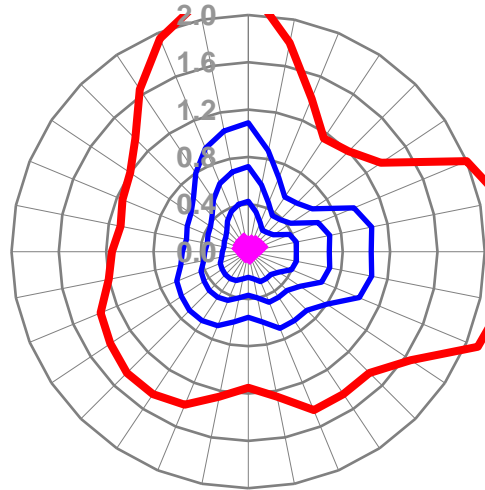


43

North

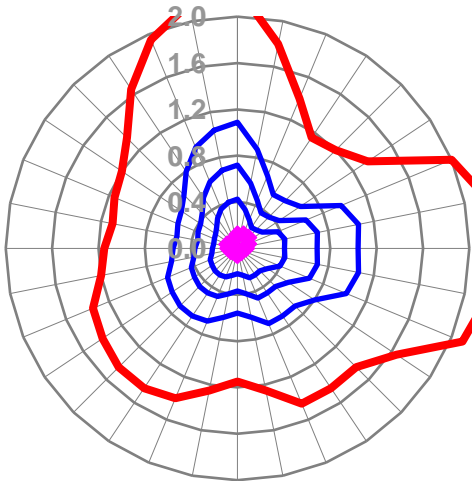

North

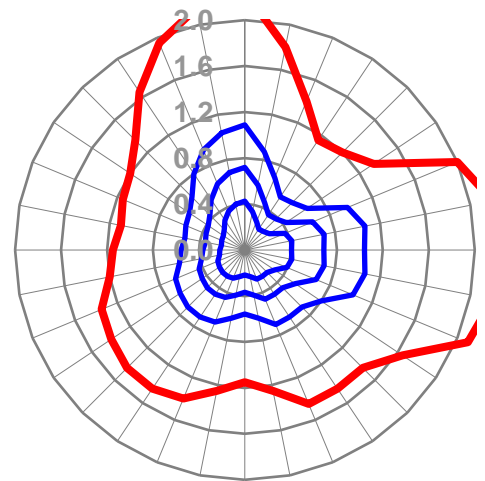

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction


Proposed Configuration




Figure A11 - Hunter and Empire Lanes - continued

Test Location


T1

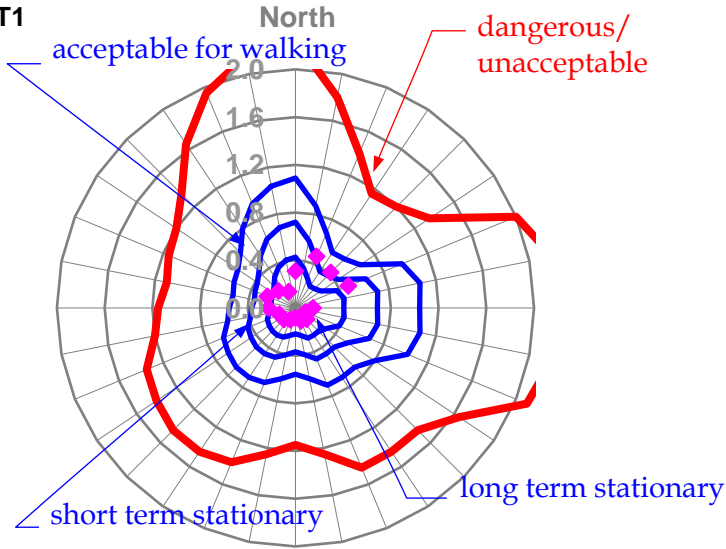


T2

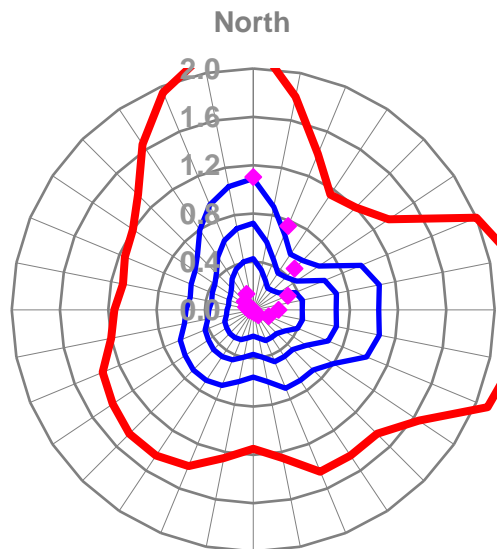

T3

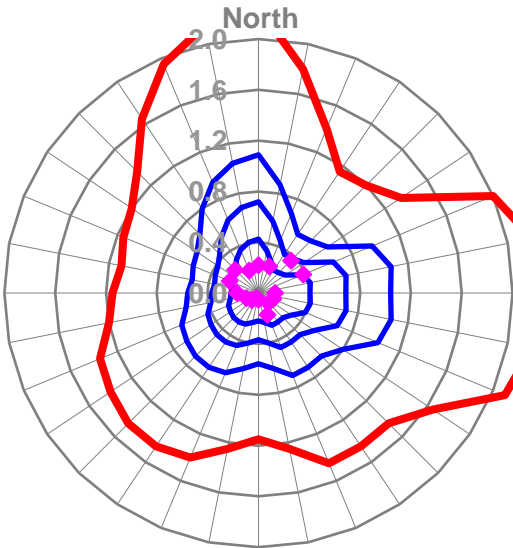


T4

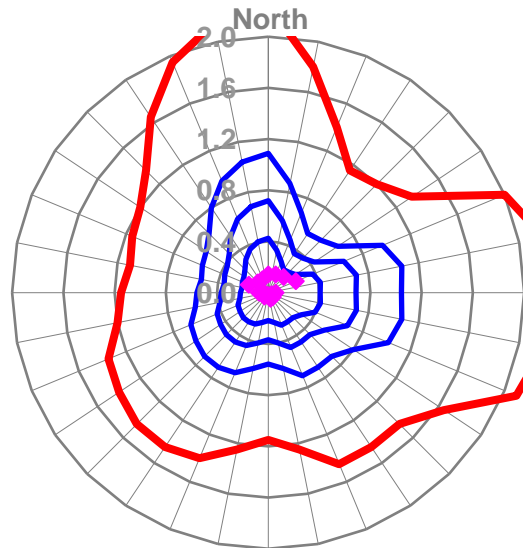

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A12 - Podium Terrace

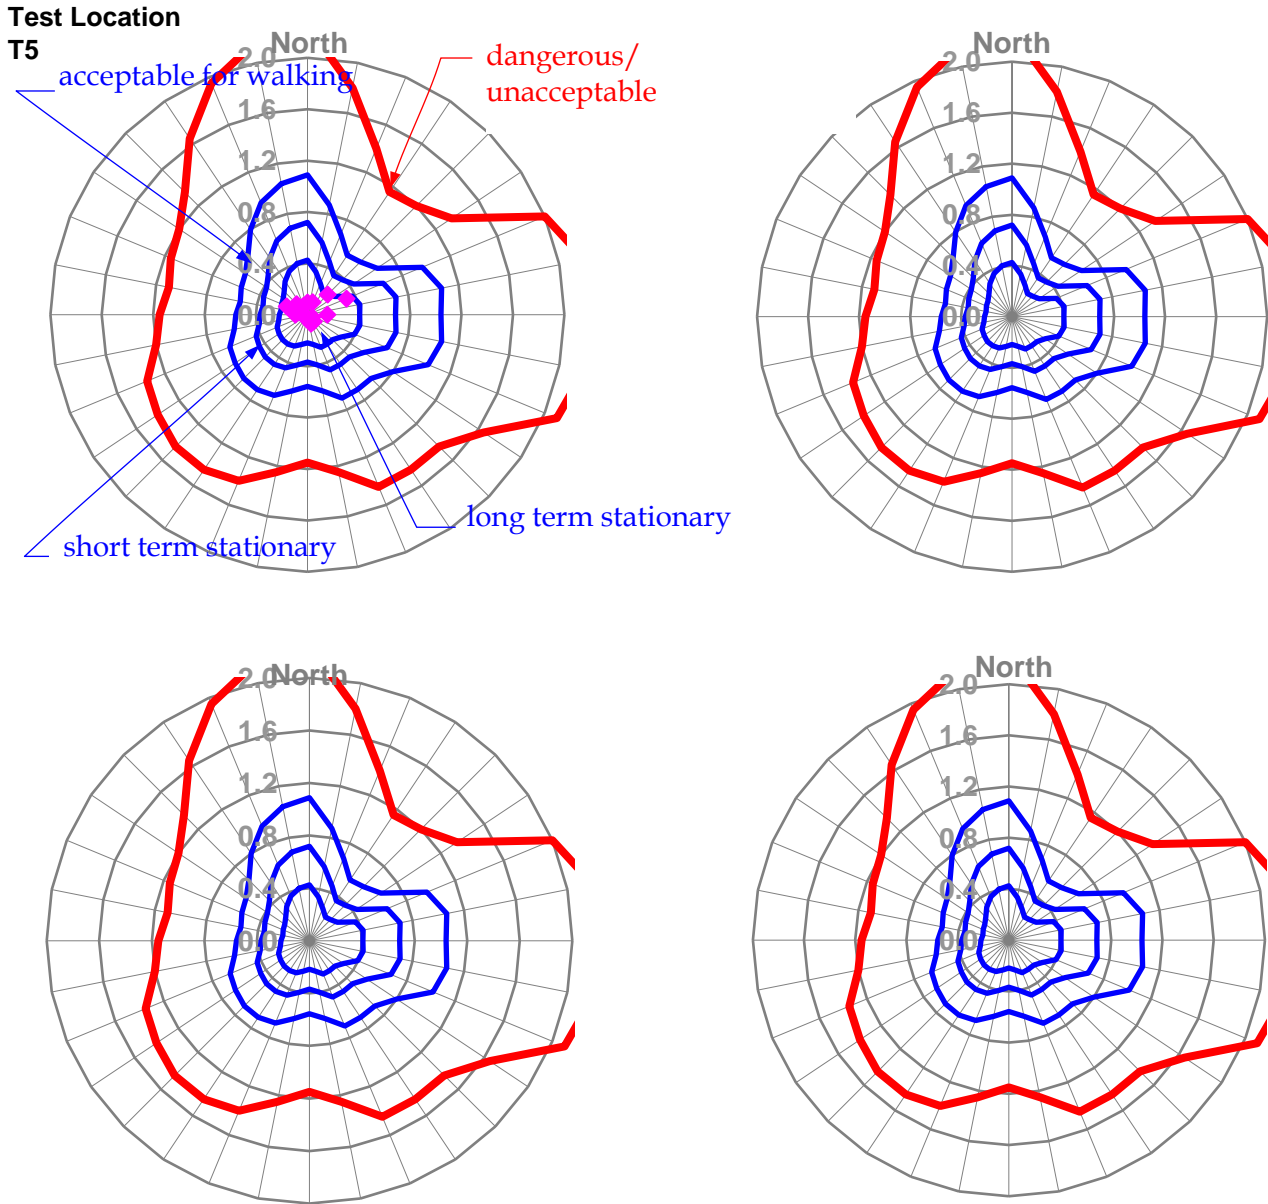

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction


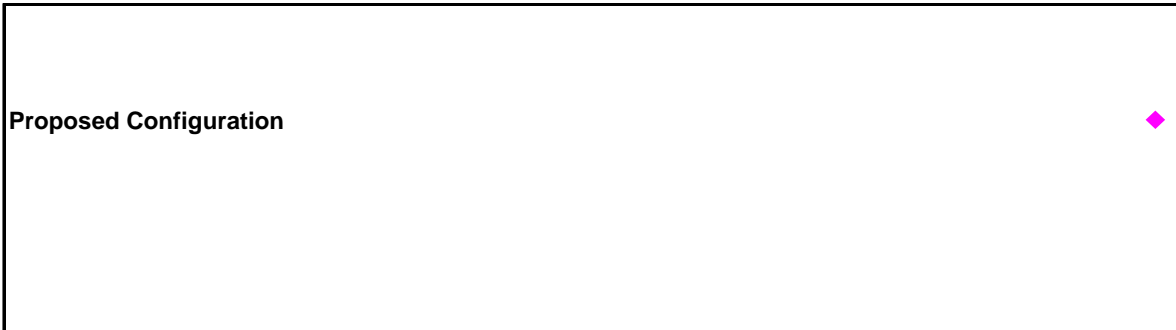



Figure A13 - Podium Terrace - continued

Test Location



R1

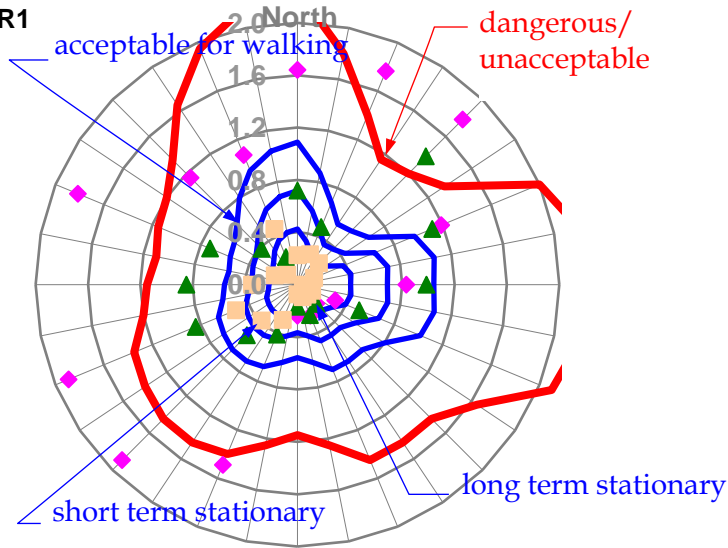

R2

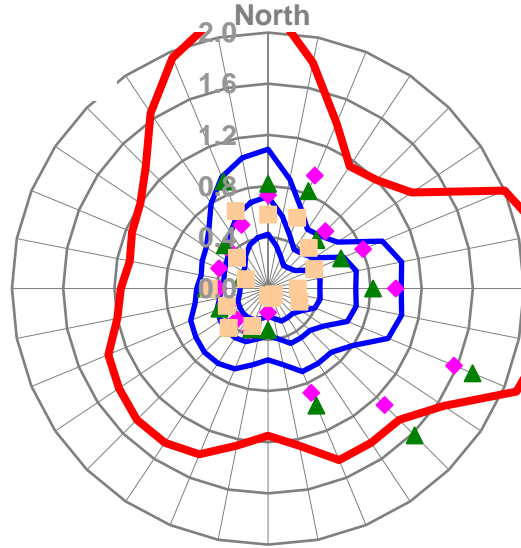


R3

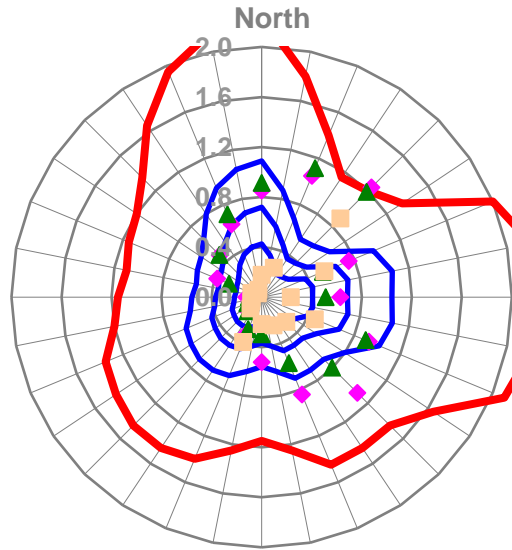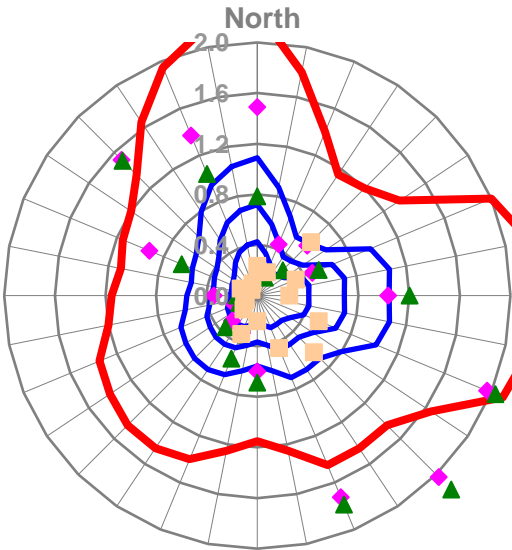

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A14 - Rooftop Terrace

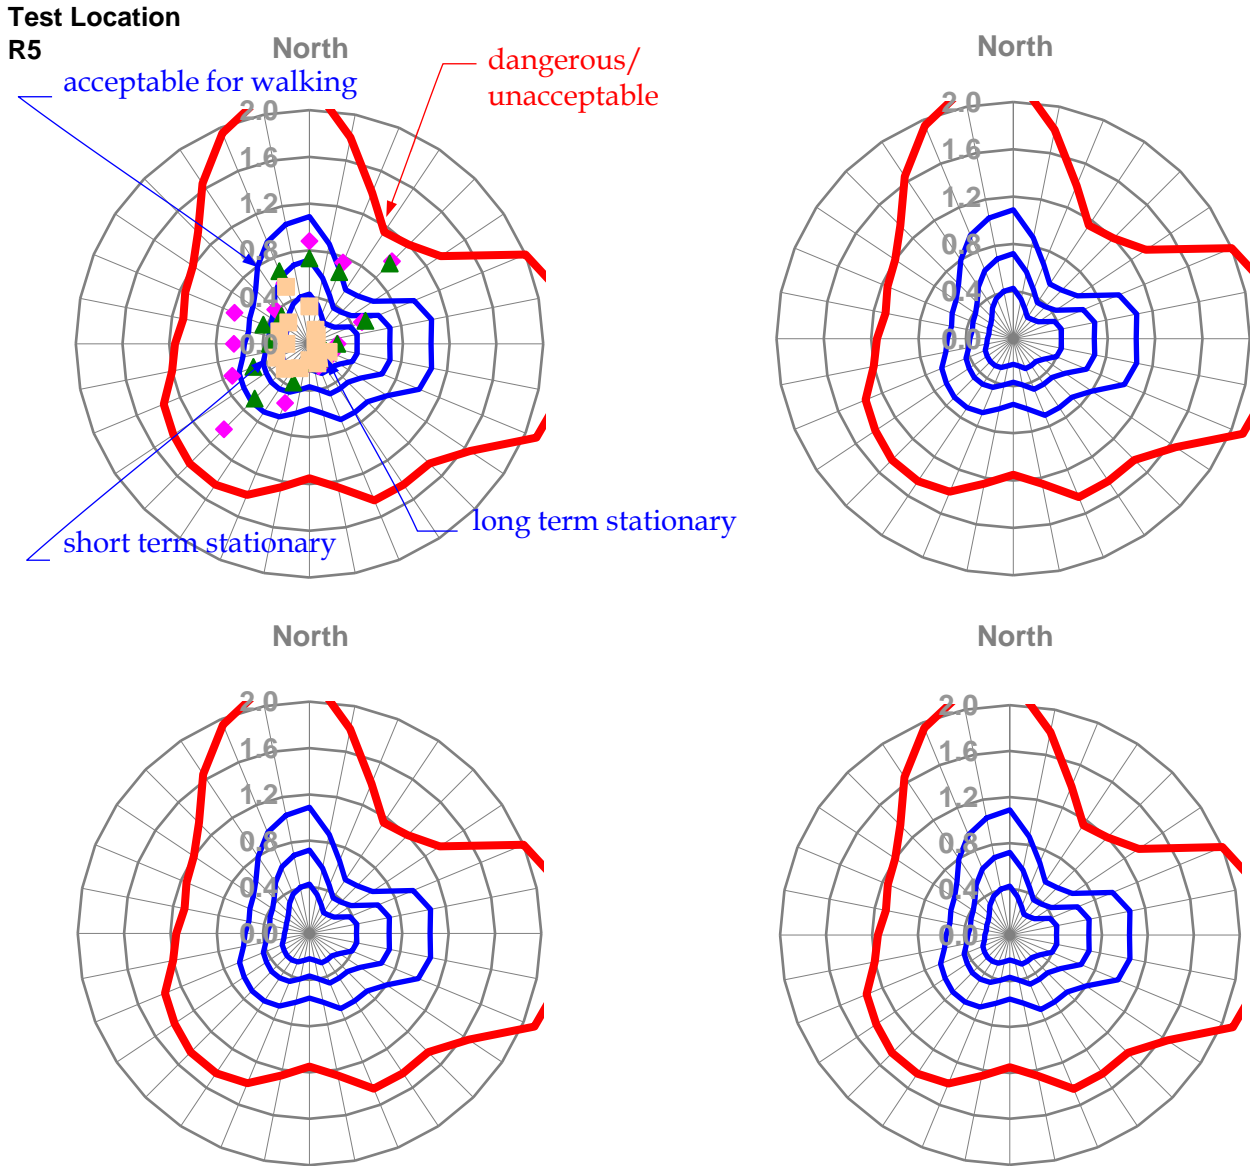

Peak velocity squared ratio $\left| \frac{\hat{V}_{local}}{\bar{V}_{300m}} \right|^2$ as a function of wind direction



Figure A15 - Rooftop Terrace

Location	Wind Comfort						Wind Safety					
	Annual						Annual					
	Speed (m/s)			Category			Speed (m/s)			Category		
	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed
Description of measurement location	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.			Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert wind safety category that corresponds to the applicable wind safety speed.		

Pitt Street
Pitt Street
Pitt Street
Pitt Street
Pitt Street
Pitt Street
Pitt Street
Pitt Street
Pitt Street

3	3.65	3.94	3.98	Sitting	Sitting	Sitting	10.50	10.80	10.06	Pass	Pass	Pass	
4	2.69	2.81	3.07	Sitting	Sitting	Sitting	6.77	8.01	8.75	Pass	Pass	Pass	
5	2.47	3.38	3.94	Sitting	Sitting	Sitting	7.45	9.65	11.58	Pass	Pass	Pass	
6	3.12	3.16	3.27	Sitting	Sitting	Sitting	9.30	9.56	8.85	Pass	Pass	Pass	
7a	3.21	3.17	3.65	Sitting	Sitting	Sitting	11.62	10.88	13.17	Pass	Pass	Pass	
8	3.49	3.26	3.70	Sitting	Sitting	Sitting	12.02	10.56	14.05	Pass	Pass	Pass	
9	3.45	3.30	3.51	Sitting	Sitting	Sitting	9.20	8.20	9.47	Pass	Pass	Pass	
10	3.45	4.09	4.06	Sitting	Standing	Standing	8.30	12.20	12.59	Pass	Pass	Pass	
11	2.74	2.62	3.02	Sitting	Sitting	Sitting	7.87	7.33	8.61	Pass	Pass	Pass	
Average:		3.14	3.30	3.58	Sitting	Sitting	Sitting	9.23	9.69	10.79	Pass	Pass	Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort						Wind Safety					
	Annual						Annual					
	Speed (m/s)			Category			Speed (m/s)			Category		
	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed
Description of measurement location	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.			Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert wind safety category that corresponds to the applicable wind safety speed.		

Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street
 Hunter Street

15	4.39	4.37	4.48	Standing	Standing	Standing	15.08	15.02	14.96	Pass	Pass	Pass	
16	4.84	4.64	4.76	Standing	Standing	Standing	18.88	16.71	16.47	Pass	Pass	Pass	
18	3.44	3.61	3.61	Sitting	Sitting	Sitting	10.38	10.83	10.18	Pass	Pass	Pass	
19	3.19	3.01	3.30	Sitting	Sitting	Sitting	11.64	9.63	10.45	Pass	Pass	Pass	
21	2.71	3.41	3.38	Sitting	Sitting	Sitting	7.70	10.51	9.37	Pass	Pass	Pass	
22	4.81	4.46	4.33	Standing	Standing	Standing	14.25	13.70	14.26	Pass	Pass	Pass	
23	2.44	2.61	2.74	Sitting	Sitting	Sitting	7.74	8.58	6.87	Pass	Pass	Pass	
24	3.91	4.30	4.05	Sitting	Standing	Standing	8.97	9.81	10.05	Pass	Pass	Pass	
26	3.53	3.77	3.70	Sitting	Sitting	Sitting	10.29	9.42	9.89	Pass	Pass	Pass	
Average:		3.70	3.80	3.82	Sitting	Sitting	Sitting	11.66	11.58	11.39	Pass	Pass	Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort						Wind Safety					
	Annual						Annual					
	Speed (m/s)			Category			Speed (m/s)			Category		
	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed
Description of measurement location	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.			Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert wind safety category that corresponds to the applicable wind safety speed.		

George Street
George Street

31	3.92	6.05	5.45	Sitting	Walking	Standing	12.43	17.57	15.72	Pass	Pass	Pass
32	4.20	4.02	4.03	Standing	Standing	Standing	14.01	13.98	13.89	Pass	Pass	Pass

Average:	4.06	5.04	4.74	Standing	Standing	Standing	13.22	15.78	14.81	Pass	Pass	Pass
----------	------	------	------	----------	----------	----------	-------	-------	-------	------	------	------

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort						Wind Safety						
	Annual						Annual						
	Speed (m/s)			Category			Speed (m/s)			Category			
	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	
Description of measurement location	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.			Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert wind safety category that corresponds to the applicable wind safety speed.			
Laneway	37	N/A	N/A	2.76	N/A	N/A	Sitting	N/A	N/A	9.13	N/A	N/A	Pass
Laneway	38	N/A	N/A	2.30	N/A	N/A	Sitting	N/A	N/A	7.26	N/A	N/A	Pass
Laneway	39	N/A	N/A	2.55	N/A	N/A	Sitting	N/A	N/A	8.10	N/A	N/A	Pass
Laneway	40	N/A	N/A	1.68	N/A	N/A	Sitting	N/A	N/A	5.54	N/A	N/A	Pass
Laneway	41	N/A	N/A	1.74	N/A	N/A	Sitting	N/A	N/A	5.47	N/A	N/A	Pass
Laneway	42	N/A	N/A	1.95	N/A	N/A	Sitting	N/A	N/A	5.92	N/A	N/A	Pass
Laneway	43	N/A	N/A	2.44	N/A	N/A	Sitting	N/A	N/A	7.21	N/A	N/A	Pass
Average:		N/A	N/A	2.20	N/A	N/A	Sitting	N/A	N/A	6.95	N/A	N/A	Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort						Wind Safety					
	Annual						Annual					
	Speed (m/s)			Category			Speed (m/s)			Category		
	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed	Existing	Base Case	Proposed
Description of measurement location	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.			Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert wind safety category that corresponds to the applicable wind safety speed.		

Pitt Street	3.14	3.30	3.58	Sitting	Sitting	Sitting	9.23	9.69	10.79	Pass	Pass	Pass
Hunter Street	3.70	3.80	3.82	Sitting	Sitting	Sitting	11.66	11.58	11.39	Pass	Pass	Pass
George Street	4.06	5.04	4.74	Standing	Standing	Standing	13.22	15.78	14.81	Pass	Pass	Pass
Average :	3.63	4.05	4.04	Sitting	Sitting	Sitting	11.37	12.35	12.33	Pass	Pass	Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort								Wind Safety								
	Annual								Annual								
	Speed (m/s)				Category				Speed (m/s)				Category				
				Proposed				Proposed				Proposed				Proposed	
Description of measurement location	#	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.				Insert the wind comfort category that corresponds to the applicable wind comfort speed.				Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.				Insert wind safety category that corresponds to the applicable wind safety speed.			
Podium Terraces	T1				4.09				Standing				12.78				Pass
Podium Terraces	T2				3.20				Sitting				15.73				Pass
Podium Terraces	T3				3.71				Sitting				11.87				Pass
Podium Terraces	T4				2.57				Sitting				8.22				Pass
Podium Terraces	T5				2.72				Sitting				9.31				Pass
Average:					3.26				Sitting				11.58				Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded

Location	Wind Comfort								Wind Safety							
	Annual								Annual							
	Speed (m/s)				Category				Speed (m/s)				Category			
		Proposed	Proposed + 1.8m balustrade	Proposed + screens + 1.8m balustrade		Proposed	Proposed + 1.8m balustrade	Proposed + screens + 1.8m balustrade		Proposed	Proposed + 1.8m balustrade	Proposed + screens + 1.8m balustrade		Proposed	Proposed + 1.8m balustrade	Proposed + screens + 1.8m balustrade
Description of measurement location	#	Insert mean wind speed in m/s exceeded 5% of the time between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.			Insert the wind comfort category that corresponds to the applicable wind comfort speed.				Insert pedestrian safety wind speed in m/s. This is the annual maximum 0.5 second gust wind speed between 6am and 10pm. Insert a result for each location tested for existing conditions, proposed planning envelope and base case compliant envelope.				Insert wind safety category that corresponds to the applicable wind safety speed.			
Rooftop Terraces	R1	9.67	6.84	4.13		Uncomfortable	Walking	Standing		28.49	23.25	12.57		Exceeded	Pass	Pass
Rooftop Terraces	R2	7.09	7.29	5.03		Walking	Walking	Standing		18.98	21.31	14.01		Pass	Pass	Pass
Rooftop Terraces	R3	8.21	7.70	4.51		Uncomfortable	Walking	Standing		23.82	24.64	15.28		Pass	Exceeded	Pass
Rooftop Terraces	R4	6.81	6.37	4.30		Walking	Walking	Standing		22.00	21.52	18.63		Pass	Pass	Pass
Rooftop Terraces	R5	6.54	5.84	4.04		Walking	Standing	Standing		19.72	19.47	10.50		Pass	Pass	Pass
Average:		7.67	6.81	4.40		Walking	Walking	Standing		22.60	22.04	14.20		Pass	Pass	Pass

Wind comfort categories (m/s)

≤ 4	Sitting
4.1 - 6	Standing
6.1 - 8	Walking
> 8	Uncomfortable

Wind safety categories (m/s)

≤ 22	Pass
> 22; ≤ 24	Pass
> 25	Exceeded