

Local Planning Panel

5 April 2023

Application details

191-195, 197-199, 201 Oxford Street, Darlinghurst

D/2022/327

Applicant/Architect: Neeson Murcutt + Neille

Owner: Save the Robots Trust

Consultants: Mersonn Pty Ltd

Proposal

- alterations and additions to 191-195 Oxford Street
- partial demolition, excavation and construction of a 6 storey building at 197-199, 201 Oxford St
- comprises a hotel, a basement hospitality tenancy, ground floor cafe and restaurant, art gallery spaces, and rooftop bar

Recommendation

Refusal

Notification

- exhibition period 1 June to 30 June 2022
- 199 owners and occupiers notified
- 22 submissions received


Submissions

- fails to respond to the existing or desired character for the locality
- height exceedance would set an undesirable precedent
- view impacts
- rights to rely on the private laneway for access and servicing
- failure to remove existing billboard
- failure to consult with and retain existing LGBTQIA+ premises
- potential impact to Busby's Bore


Site






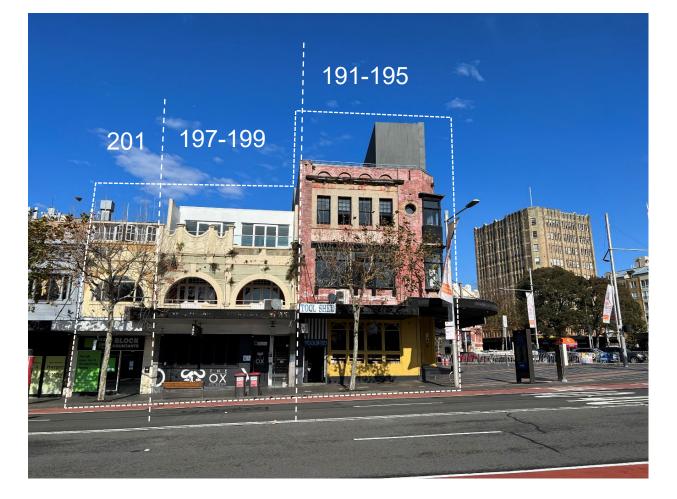

site viewed from Oxford Street

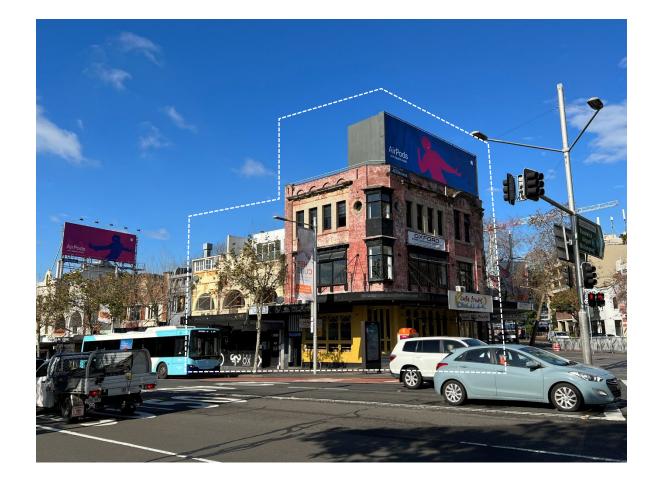

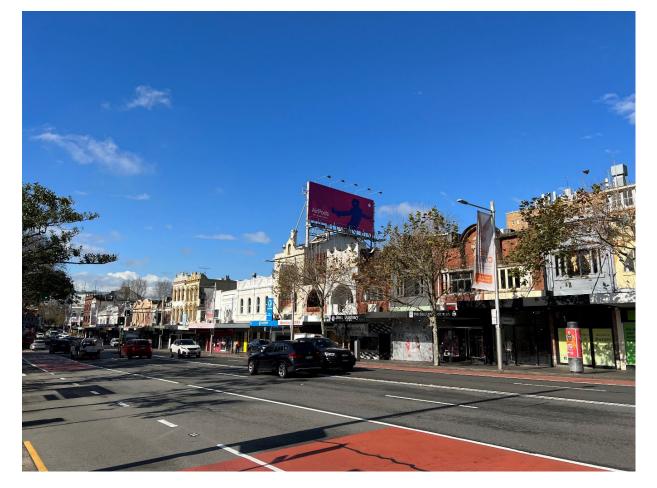


buildings to the east along Oxford Street



Darlinghurst Courthouse

opposite side of Oxford Street to the north

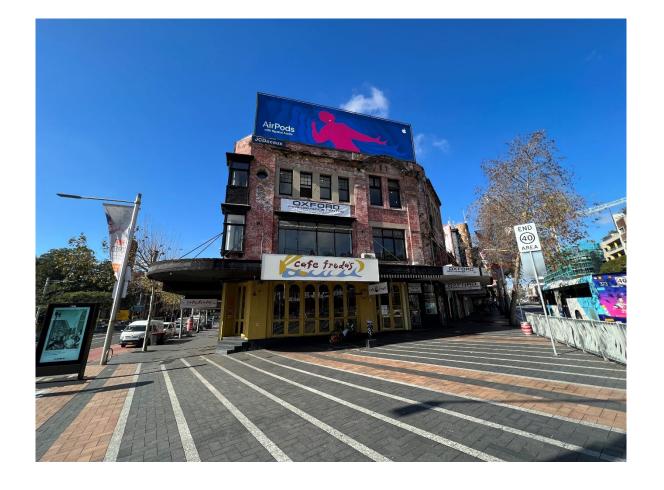

corner of Oxford Street and Flinders Street



'T2' building




Courthouse Hotel and Kinselas Hotel

opposite side of Taylor Square to west



Oxford Hotel

opposite side of Oxford Street/Taylor Square to north west

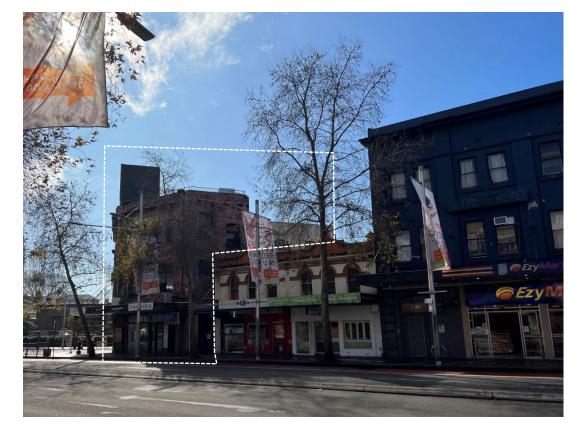




site viewed from Flinders Street

adjoining buildings to south

Proposal










with existing street trees






without existing street trees

with existing street trees

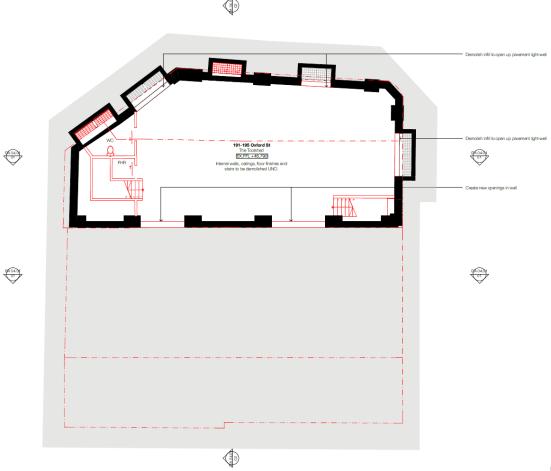




demolition - basement

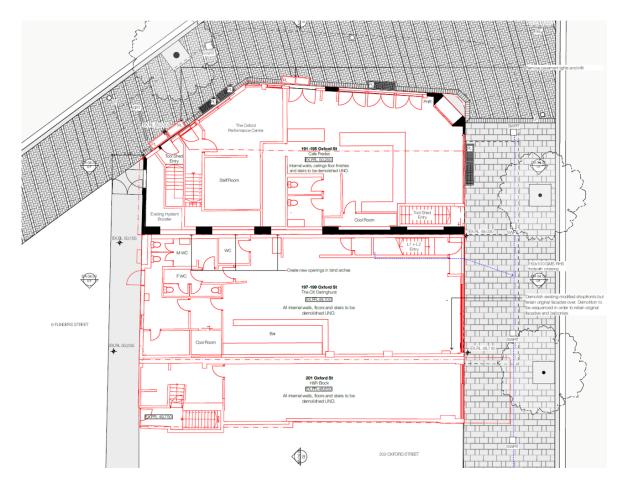




demolition - level 1 (ground)

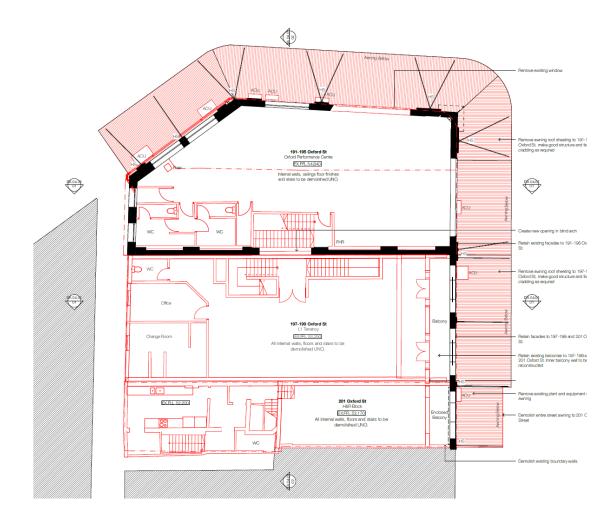






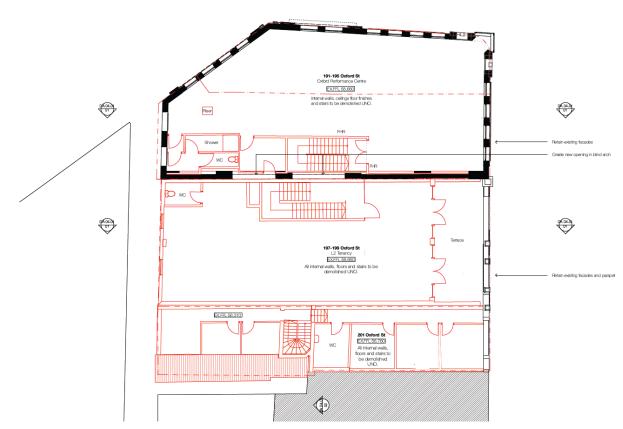




demolition - level 3



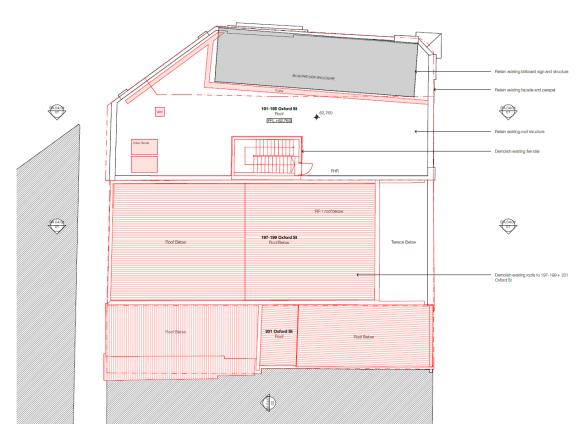



demolition - roof

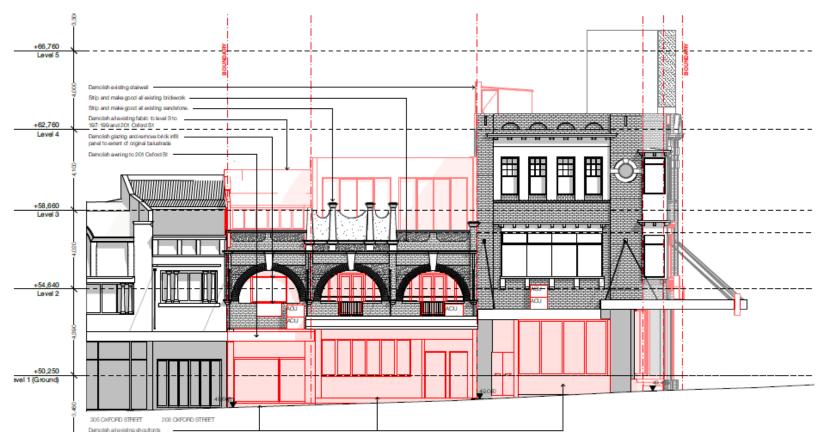

demolition - north elevation




demolition - north-west elevation



demolition - west elevation




demolition - south elevation

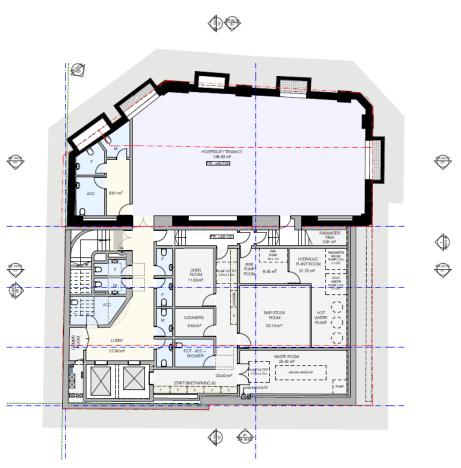




proposed - basement

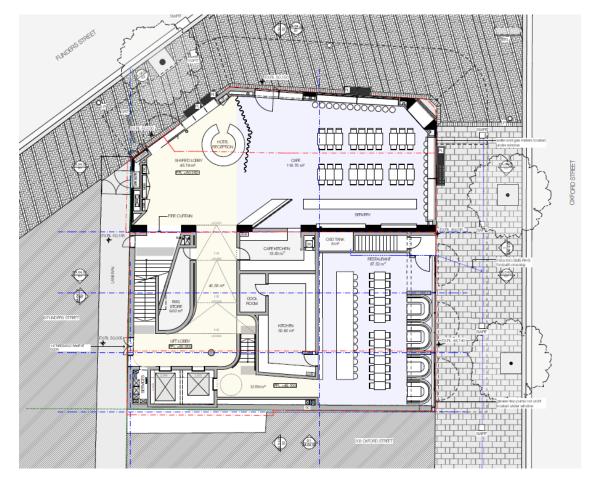





proposed - level 1 (ground)

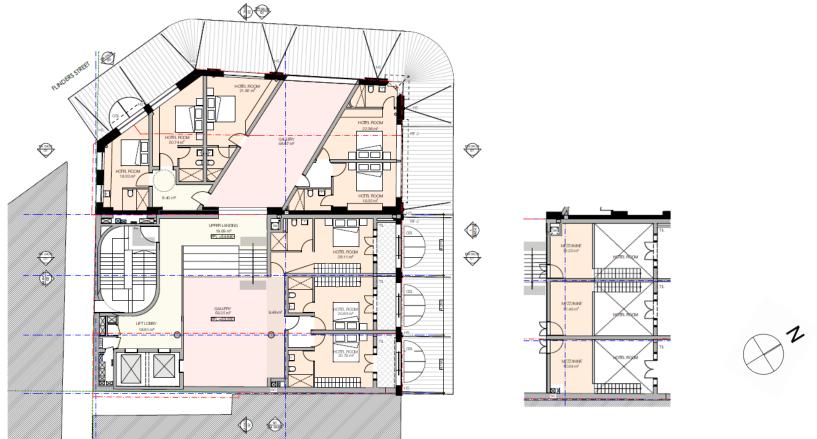

proposed - level 2

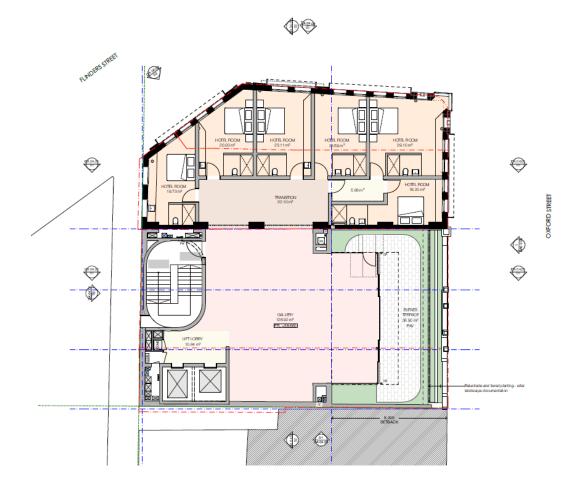




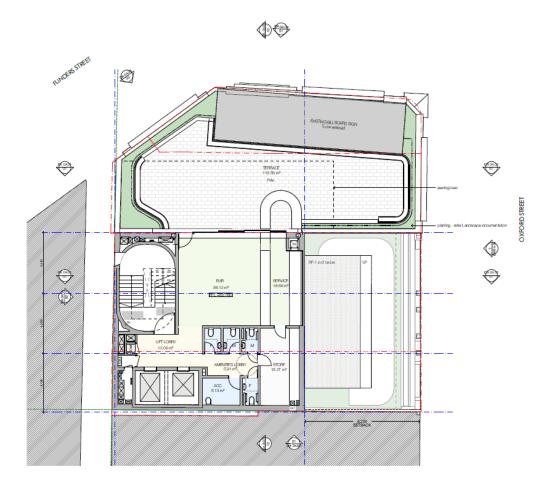





proposed - level 4

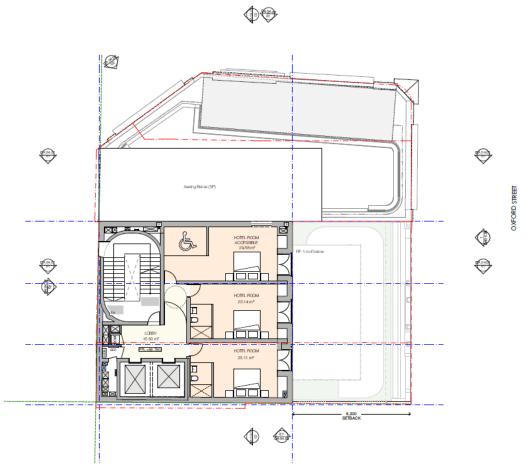



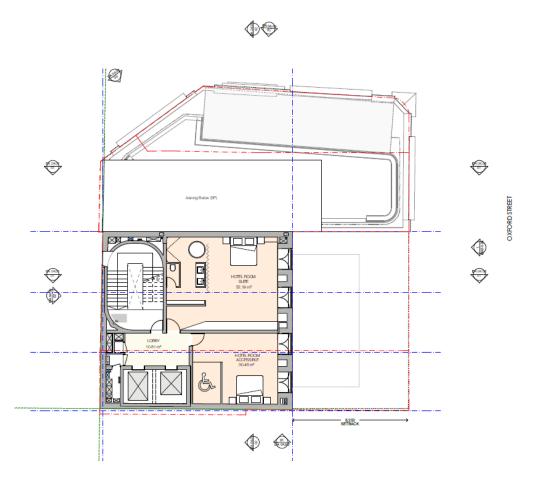



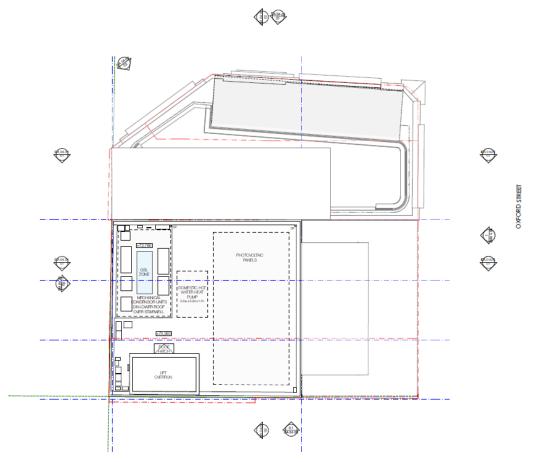




proposed - roof plant




proposed - north elevation




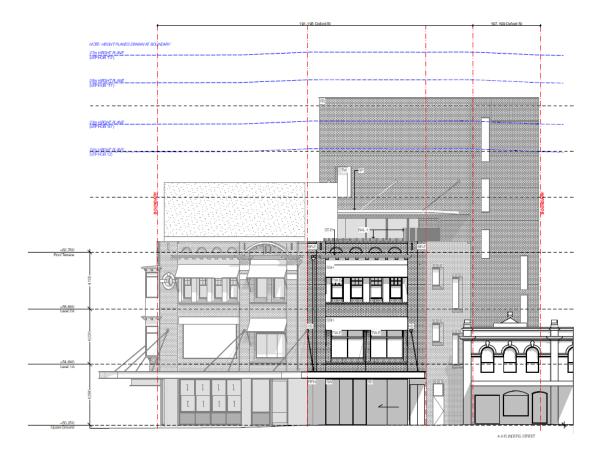

proposed - west elevation

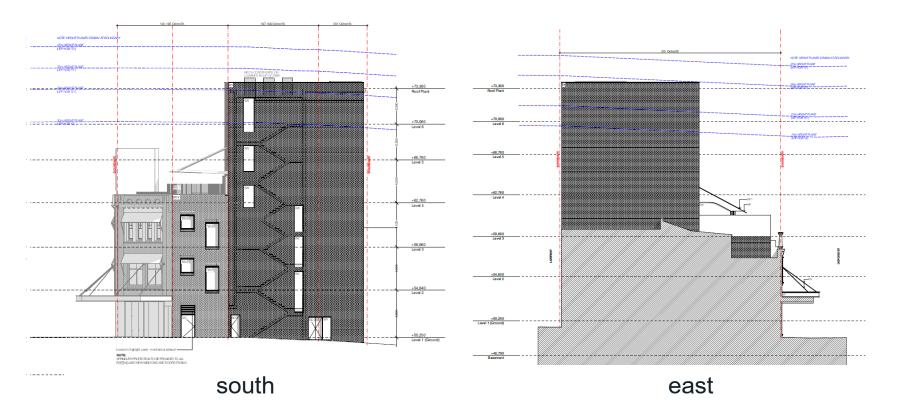

proposed - south and east elevations

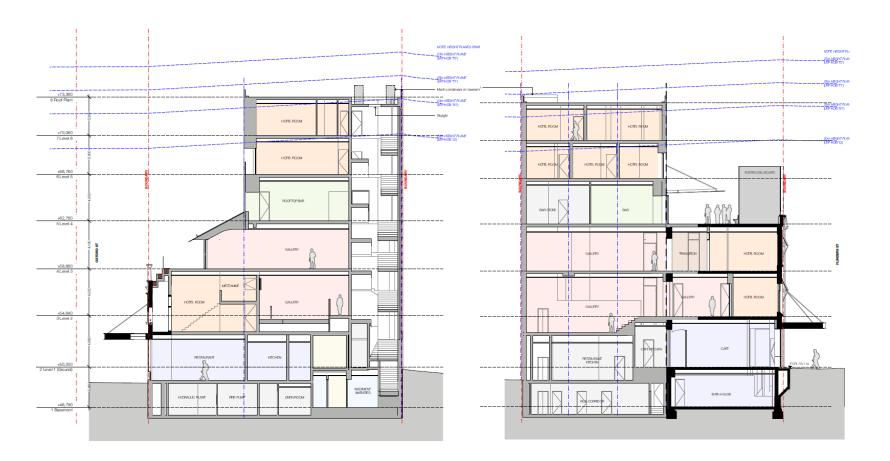

sections





Brickwork - existing Existing paint stripped Location: Existing facades



REN-E Render - existing Repaired & painted Location: Existing facade ornamentation



Sandstone - existina Restored & refurbished

Location: Existing facade ornamentation

Render - decorative mould (existing) Repaired & painted



Location: 197-199 + 201 facade ornamentation



Face Brick Natural Brick Co - Lutyens Brick Colour: 7x colours

Location: New tower cladding



Aluminium framed Doors Clear glass

Location: Sliding doors on Level 3 & 4 terraces



Face Brick with Glass Bricks

Location: Behind level 4 bar



Steel Plate Paint Finish

Location: Rooftop bar awning



Roof Cladding type 1 Brick Splits Natural Brick Co - Lutyens Colour: 7x colours to match tower facade

Location: Events Terrace Awning Roof



Timber framed doors / windows Clear finish with clear glass

Location: Hotel room balconies



BAL-1 Steel Palisade Ballustrade Paint Finish - protective coating

Location: Level 5 + 6 balconies and rooftop terraces



Steel framed window Clear glass

Location: Windows to fire stair (sprinklered)

materials

Compliance with key LEP standards

	control	proposed	compliance
height	191-195 standard: 15m alternative: 23m	18.7m	yes
	197- 201 standard: 12m alternative: 20m	24.8m	no* - clause 4.6 not supported

^{*}clause 4.6 does not allow a variation to the alternative control

Compliance with key LEP standards

	control	proposed	compliance
floor space ratio	191-195 standard: 3:1 alternative: 4:1	3.41:1	yes
	197-201 standard: 3:1 alternative: 3.75:1	3.5:1	yes

Issues

- Compliance with Oxford Street Cultural and Creative Precinct controls
- height non compliance
- design excellence
- heritage
- contamination
- flooding
- other issues inadequate information


Oxford Street Cultural and Creative Precinct

- aims to encourage redevelopment to provide cultural and creative floor space by allowing additional height and FSR
- supported by detailed built form controls to achieve the desired character
- proposed built form is contrary to the desired character and exceeds maximum building heights
- essentially the development seeks to benefit from the controls whilst not complying with them

Height - 197- 201 Oxford Street

- standard maximum height: 12m
- alternative maximum height: 20m
- proposed height of 24.8m
- clause 4.6 does not allow variation to the alternative height
- therefore 12.8m (106.7%) variation to the standard height
- clause 4.6 variation request not supported
- fails to demonstrate that compliance is unreasonable or unnecessary and that there are sufficient environmental planning grounds

Height

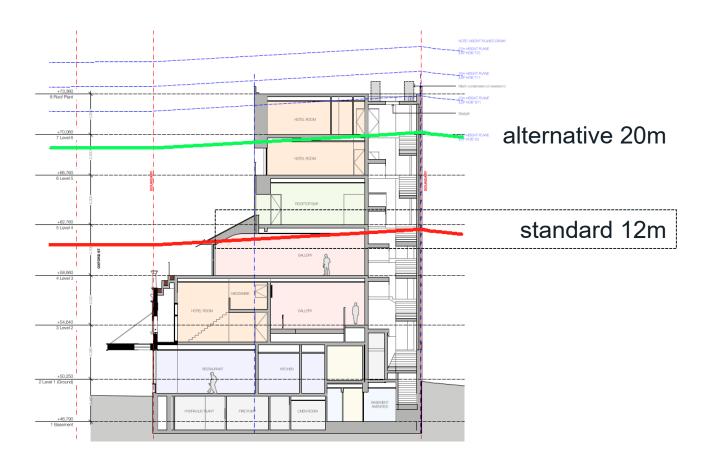

Design Excellence

- proposed built form is contrary to the intent of the controls for the newly created Oxford Street Cultural and Creative Precinct
- Design Advisory Panel does not consider the proposal to exhibit design excellence - erodes the corner presentation, weakens the definition of Taylor Square, architectural language inappropriate
- consent cannot be granted as per section 6.21C(1) of the LEP

Heritage

- site within heritage conservation area all buildings contributory items
- significant amount of demolition proposed inadequate structural statement provided
- proposal includes inappropriate elements that result in adverse impacts on contributory buildings
- failure to remove detracting elements, i.e. existing billboard

Contamination

- preliminary site investigation confirms a detailed site investigation (DESI) is required
- a DESI has not been submitted
- applicant has failed to demonstrate the site can be made suitable for the proposed development
- consent cannot be granted as per section 4.6 of the SEPP (Resilience and Hazards) 2021

Flooding

- site is identified as flood-affected
- a site specific flood report has not been provided
- applicant has failed to demonstrate the development adequately addresses flooding
- consent cannot be granted as per section 5.21(2) of the LEP

Other issues – inadequate information

- application does not identify the nature, capacity, operating hours, and operational management of each of the premises
- inadequate acoustic report to consider the cumulative impact of the development
- inadequate Plan of Management, including the lack of Diversity and Inclusion principles and guidelines (as required by Oxford Street Cultural and Creative Precinct controls)
- inadequate waste management plan
- no provision of public art

Recommendation

- Clause 4.6 variation request to non compliance with height limit not supported
- Refusal